



### Model Number

PMI104-F90-IU-V1

### Features

- Analog output 0 V ... 10 V/4 mA ... 20 mA
- Measuring range 0 ... 104 mm

## Technical data

### General specifications

Switching element function	analog, current or voltage output
Object distance	0.5 ... 3 mm, recommended: 2 mm
Measurement range	0 ... 104 mm
Linearity range	1 ... 103 mm

### Nominal ratings

Operating voltage $U_B$	18 ... 30 V DC
Reverse polarity protection	reverse polarity protected
Linearity error	within measuring range: $\pm 0.8$ mm within linearity range: $\pm 0.4$ mm

Repeat accuracy R	$\pm 0.1$ mm
Resolution	125 $\mu$ m
Temperature drift	$\pm 0.5$ mm (-25 °C ... 70 °C)
No-load supply current $I_0$	$\leq 40$ mA
Operating voltage indicator	LED green

### Functional safety related parameters

MTTF <sub>d</sub>	320 a
Mission Time ( $T_M$ )	20 a
Diagnostic Coverage (DC)	0 %

### Analog output

Output type	1 current output: 4 ... 20 mA 1 voltage output: 0 ... 10 V
Load resistor	current output: $\leq 400 \Omega$ voltage output: $\geq 1000 \Omega$
Short-circuit protection	voltage output: pulsing

### Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
---------------------	--------------------------------

### Mechanical specifications

Connection type	4-pin, M12 x 1 connector
Degree of protection	IP67
Material	
Housing	ABS
Target	mild steel, e. g. 1.0037, SR235JR (formerly St37-2)


### Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007 EN 60947-5-7:2003 IEC 60947-5-7:2003


### Approvals and certificates

EAC conformity	TR CU 020/2011
UL approval	cULus Listed, General Purpose, Class 2 Power Source
CCC approval	CCC approval / marking not required for products rated $\leq 36$ V


## Dimensions

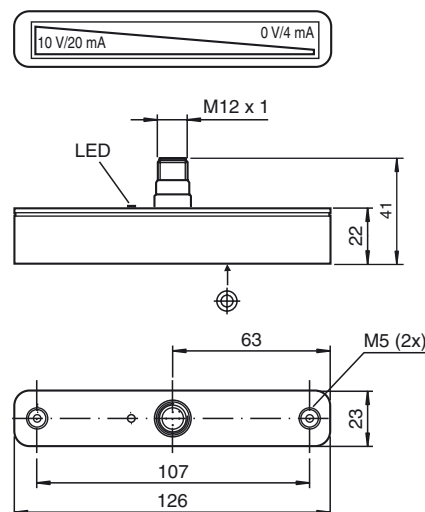

**Electrical Connection**

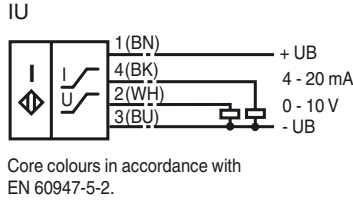

**Pinout**





Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

**Additional Information**

dimensions for the target object:

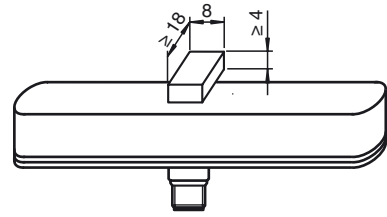

**Accessories**

- BT-F90-W**  
Damping element for sensors of type F90, F112, and F166; side hole
- MH-F90**  
Mounting bracket for mounting of F90 sensors
- V1-G-2M-PVC**  
Female cordset, M12, 4-pin, PVC cable
- BT-F90-G**  
Damping element for sensors of type F90, F112, and F166; front hole

**Operating instructions**

**Safety information**



This product may not be used in applications where personal safety depends on the function of the device. This product is not a safety component as described in EU Machinery Directive.

**Sensor versions**

The F90 linear position measurement system is available in 2 versions. In the PMI...-F90-IU-V1 version, the position measuring system transmits current and voltage signals proportional to the position of the damping element at the outputs. The PMI...-F90-IE8-V15 version offers a current signal as well as the option of teaching in two switching points directly at the sensor independently of one another at the press of a button, which is then indicated on two switching outputs. Two additional LEDs indicate the output states of the two switching outputs.

**Version PMI...-F90-IU-V1**

Output signals: 4 mA ... 20 mA and 0 V ... 10 V



Only the current output or the voltage output may be used. The unused output must remain load free.

**Version PMI...-F90-IE8-V15**

Output signals: 4 mA ... 20 mA and 2 programmable switching amplifiers

**Programming the PMI...-F90-IE8-V15**

- The rear of the PMI...-F90-IE8-V15 sensor has two small, slightly recessed push buttons for programming the switching points. The buttons are marked "teach in" and S1 for switching point S1 and S2 for switching point S2.
- To teach in a switching point, proceed as follows:
- The position detection damping element must be placed at the relevant position, i.e. the switching point that you wish to teach in.
  - Press the corresponding push button for at least two seconds.

Release date: 2017-07-24 09:59 Date of issue: 2017-07-24 191135\_eng.xml

The associated switching state LED starts flashing to indicate that the sensor is now in "teach mode".  
 - Press the button again to confirm the relevant switching point.

The switching state LED then lights up constantly as long as the damping element is not moved.

The switching point is now taught in and the associated switching point changes to an active state within an actuator adjustment range of  $\pm 1$  mm around the taught switching point.




If the switching point is not confirmed within 80 seconds, the sensor exits "teach mode" and continues operation with the previous values.

**Damping element**

The linear position measurement system is adapted perfectly to the geometry of the damping elements offered in our product range.






When using other damping elements, always make sure that the active surface of the damping element has a width of exactly 8 mm and covers the entire width of the sensor.



**Installation and operation**

**Instructions on installation**

- Flush installation is possible
- to extend the measuring range, units from the -F90 linear position measurement system can be connected in series (both behind and adjacent to one another) without a minimum distance.
- The minimum distance between the measuring field (framed area on the sensor front) and mounting base or mounting elements on the damping element must be 3 mm.




**Operating information**

The specified measurement accuracy is achieved with an actuator distance of 1 to 3 mm.


If the damping element leaves the measuring area (illustration below):

- the last valid value is retained at the voltage output (PMI...-F90-IU-V1 only) until the damping element enters the valid area again.
- the last valid value is retained for 0.5 seconds at the current output (all types). The output then switches to a fault current of 3.6 mA until the damping element enters the valid area again.
- the switching amplifiers set to basic state after 0.5 seconds ("normally open").

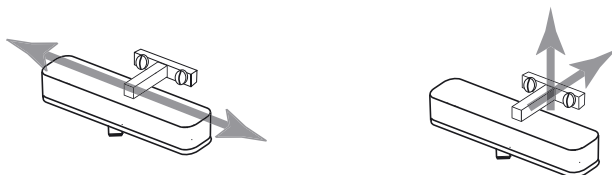

**Defining the measuring range / measured position**

The measured position of the damping element (actuator) is based on half of the width (center of the actuator). The measuring range starts and finishes when half the width of the actuator covers the measurement field marked on the sensor when the actuator makes a longitudinal movement (see left illustration above).

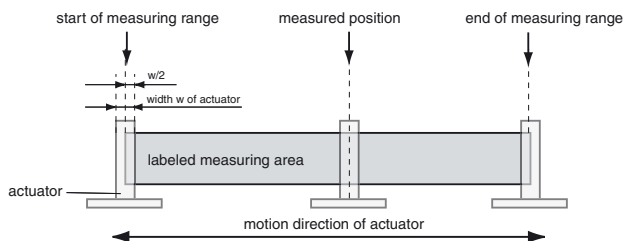

**Accessories**

**Damping elements**  
BT-F90-W



**Mounting bracket**  
MH-F90



**Straight cable:**

- V1-G-2M-PVC (4-wire)
- V15-G-2M-PVC (5-wire)

**Angled cable:**

- V1-W-2M-PVC (4-wire)
- V15-W-2M-PVC (5-wire)

Release date: 2017-07-24 09:59 Date of issue: 2017-07-24 191135\_eng.xml



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)