




- * 4 pole changeover 10A rated contacts (500,000 electrical operations min.)
- * LED indication and arc barrier as standard
- * LED indicator colour coded green for DC, red for AC
- * Operating temperature from -25°C up to +70°C
- * DIN Rail / surface mounting screw terminal relay bases
- * Approvals include UL, CSA, SEV, TUV, VDE, CE

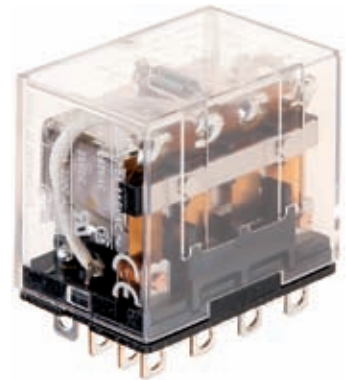

14 Pin Flat Plug-in Relays

Part Number	Coil Voltage	No. of Poles	Function	Current Rating (A)	Description
LY4/012AC	12 V AC	4P	C/O	10	Heavy Duty Relay
LY4/012DC	12 V DC				
LY4/024AC	24 V AC				
LY4/024DC	24 V DC				
LY4/048AC	48 V AC				
LY4/048DC	48 V DC				
LY4/110AC	110 V AC				
LY4/110DC	110 V DC				
LY4/230AC	230 V AC				

Accessories



PTF14A-E

Accessories (Order Separately)

Part Number	Description
PTF14A-E	14 Pin Relay Base (DIN Rail / surface mounting), screw terminals (Standard)
PYC-A1	Pair of clips for PTF14A-E relay base.