



Anzeigen/Bedienelemente

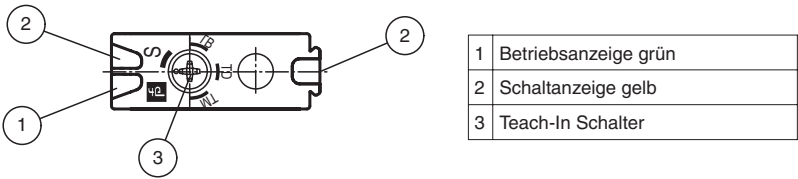


Indicators/operating means

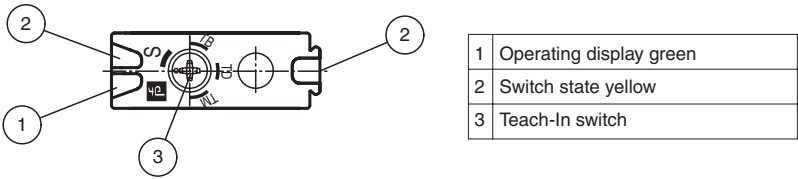

Relative Empfangslichtstärke
Intensité relative de la lumière reçue
Intensità relativa luce in ricezione

Relative received light strength
Potencia relativa de recepción lumínica

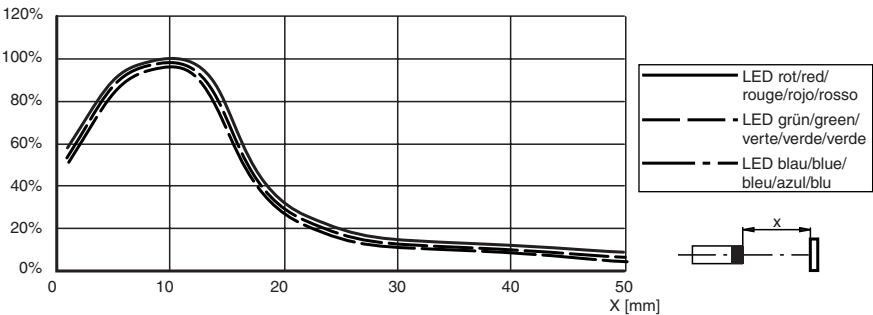

Einstellung/Adjustment

D

Bei spiegelnden oder glänzenden Objektoberflächen ist der Sensor um ca. 10° zur Materialoberfläche zu neigen.

Teach-In über Drehschalter

Teach-In über Drehschalter in vier Stellungen: Schaltbetrieb, Teach-In Mark, Teach-In Background und dynamisches Teach-In.

Für einen Wechsel der Schalterstellung muss jeweils ein Zeitschloss von ungefähr 1 Sekunde überwunden werden. Das heißt der Drehschalter muss konstant für 1 s in einer neuen Stellung stehen damit der dadurch angeforderte Modus vom Sensor akzeptiert wird (erkennbar am Wechsel der Blinkfunktion der Anzeige-LEDs).

Statisches Teach-In

Marke oder der Untergrund können im Statischen Teach-In Modus (TM/TB) wahlweise gemeinsam (in beliebiger Reihenfolge) oder separat nachgelernt werden. Es besteht also kein Zwang immer Marke und Untergrund einzulernen.

Stellung TM (Teach-In Mark)

Der Teach-In Vorgang startet und es erfolgt eine andauernde Wertübernahme, die Farbe des Tastobjekts kann dabei gewechselt werden. Bei Verlassen der Stellung Marke wird der zuletzt übernommene Wert gespeichert. Während des Modus „Teach-In Mark“ blinken die grüne und gelbe Anzeige-LED simultan (f = 2,5 Hz).

Stellung TB (Teach-In Background)

Funktionalität wie in Stellung TM.

Während des Modus „Teach-In Background“ blinken grüne und gelbe Anzeige-LED im Wechsel (f = 2,5 Hz).

Dynamisches Teach-In

Stellung TD (Teach-In Dynamic)

Der Teach-In Vorgang startet und es erfolgt eine andauernde Wertübernahme. Die ersten aufgenommenen Signale nach Einsprung in den Modus „Dynamisches Teach-In“ werden vom Sensor als Untergrund gedeutet. Die größte Abweichung vom Untergrund während des gesamten „Teach-In Dynamic“ Modus wird als Marke gedeutet.

Während des Modus „Teach-In Dynamic“ blinken grüne und gelbe Anzeige-LED simultan mit f = 1,0 Hz.

Schaltbetrieb

Stellung S (Switching Mode)

Beendigung des laufenden Teach-In Modus, Auswertung der aufgenommen Signale aller 3 Senderlichtfarben für Marke und Untergrund.

a.) Teach-In erfolgreich --> Schaltbetrieb:

- Auswahl der günstigen Senderlichtfarbe für den eingelernten Kontrast.
- Die Schaltschwelle wird mittig zwischen Marke und Untergrund gelegt.
- Die Ausgänge Q1/PNP und Q2/NPN werden bei Erkennen der eingelernten Marke aktiv.

b.) Alarm-Funktion:

Der eingelernte Kontrast ist für alle 3 Senderlichtfarben zu gering. Alle Sender werden abgeschaltet. Gelbe und grüne Anzeige-LED blinken im Wechsel mit f = 8,0 Hz. Automatischer Sprung in den Schaltbetrieb mit unveränderten Werten nach ca. 7 s.

Externer Teach-In-Eingang

Der gewünschte Betriebsmodus wird in Schalterstellung S durch Anlegen eines High-Impulses bestimmter Breite eingestellt:

Teach-In Dynamic (TD)	420 ms ... 450 ms
Teach-In Background (TB)	320 ms ... 350 ms
Teach-In Mark (TM)	220 ms ... 250 ms
Switching Mode (S)	120 ms ... 150 ms

Die Beschreibung der einzelnen Betriebsmodi entspricht dem Teach-In über Drehschalter.

Während des externen Teach-In ist die Funktion des Drehschalters deaktiviert.

Ein externer Teach-In-Vorgang muss mit einem Signal zur Anforderung des Switching Mode (S) abgeschlossen werden.

GB

In the case of reflecting or shiny object surfaces, the sensor must be tilted by approx. 10° against the material surface.

Teach-In via rotary switch

Teach-In via rotary switch in 4 settings: Switch mode, Teach-In Mark, Teach-In Background and Dynamical Teach-In.

A change of the switch setting needs to pass a 1 second time lock. That means, that the switch must be for at least 1 second in the new position before the sensor accepts the required mode (indicated by the flashing sequence of the indication LEDs).

Statical Teach-In

Statical Teach-In mode (TM/TB) allows the teach of mark and background at the same time (one after the other but independently of the order) or separately. There is no need to teach always both mark and background.

Setting TM (Teach-In Mark)

Teach-In starts with a continuous value capturing. The object's colour may change. When the switch position changes, the last captured value will be saved as the marks value. During the "Teach-In Mark" mode, the green and the yellow LEDs are flashing simultaneously (f = 2.5 Hz).

Setting TB (Teach-In Background)

Same function as described above (TM setting).

During the "Teach-In Background" mode, the green and the yellow LEDs are flashing alternating (f = 2.5 Hz).

Dynamical Teach-In

Setting TD (Teach-In Dynamic)

The Teach-In procedure starts and a continuous value capturing is carried out. The first captured signals after entering the "Dynamical Teach-In" mode are interpreted by the sensor as the background. The maximum signal variation during the entire "Teach-In Dynamic" procedure will be interpreted as the print mark.

During the "Teach-In Dynamic" procedure the green and the yellow LEDs are flashing simultaneously (f = 1.0 Hz).

Switch mode (normal operation)

Setting S (Switching Mode)

This switch setting terminates the actual Teach-In mode. Signal evaluation for each of the 3 emitter colours for both mark and background is now performed.

a.) Teach-In successfully finished --> switch mode:

- Selection of the most suitable emitter colour for the evaluated contrast.
- The switching level is set to the centre between mark and background signal.
- The switching outputs Q1/PNP and Q2/NPN are activated when the teachend mark is detected.

b.) Alarm function:

In case of too weak contrast for all 3 emitter colours, all emitters will be deactivated. The yellow and the green LED are flashing alternating wit a frequency of approx. 8,0 Hz. The sensor returns to the switch mode (normal operation) after 7 seconds without changing the saved values.

External Teach-In input

The desired operating mode is set in switch position S by connecting a high pulse of a certain width:

Teach-In Dynamic (TD)	420 ms ... 450 ms
Teach-In Background (TB)	320 ms ... 350 ms
Teach-In Mark (TM)	220 ms ... 250 ms

Switching Mode (S) 120 ms ... 150 ms

The description of the individual operating modes corresponds to the Teach-In via rotary switch.

During the external Teach-In the function of the rotary switch is deactivated.

An external Teach-In procedure must be completed with a signal for requesting the Switching Mode (S).