



- \* 2 pole changeover with 10A rated contacts (100,000 electrical operations min.)
- \* Built in operation indicator (Mechanical flag) & nameplate standard
- \* Optional features lockable test button, diode, varistor & LED indication
- \* Test button colour coded blue for DC, red for AC
- \* LED indicator colour coded green for DC, red for AC
- \* Operating temperature from -40°C up to +60°C
- \* DIN Rail / surface mounting screw clamp relay bases
- \* Approvals include UL, CSA, SEV, DEMKO, NEMKO, TÜV (IEC) and VDE


## MKS2 General Purpose Relays



### 8 Pin Plug-in Relays

Part Number	Coil Voltage	No. of Poles	Function	Current Rating (A)	Description
MKS2PI/006AC	6 V AC	2P	C/O	10	+Test Button + Mechanical Indicator
MKS2PI/006DC	6 V DC				
MKS2PI/012AC	12 V AC				
MKS2PI/012DC	12 V DC				
MKS2PI/024AC	24 V AC				
MKS2PI/024DC	24 V DC				
MKS2PI/048AC	48 V AC				
MKS2PI/048DC	48 V DC				
MKS2PI/110AC	110 V AC				
MKS2PI/110DC	110 V DC				
MKS2PI/230AC	230 V AC				
MKS2PIN/006AC	6 V AC				+Test Button, Mechanical & LED Indicator
MKS2PIN/006DC	6 V DC				
MKS2PIN/012AC	12 V AC				
MKS2PIN/012DC	12 V DC				
MKS2PIN/024AC	24 V AC				
MKS2PIN/024DC	24 V DC				
MKS2PIN/048AC	48 V AC				
MKS2PIN/048DC	48 V DC				
MKS2PIN/110AC	110 V AC				
MKS2PIN/110DC	110 V DC				
MKS2PIN/230AC	230 V AC				
MKS2PIN-D/024DC	24 V DC	+Test Button, Mechanical & LED Indicator + Diode Suppressor			

### Accessories

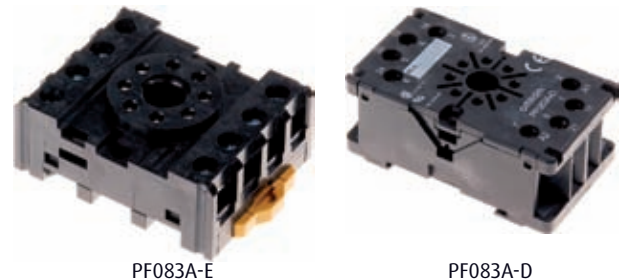

PF083A-E

PF083A-D

### Accessories (Order Separately)

Part Number	Description
PF083A-E	8-Pin Relay Base (DIN rail mounting)
PF083A-D	8-Pin Relay Base (DIN rail mounting) Euro style.
PFC-A1	Relay hold-down clip (Pair) To suit PF083A-E base.

**Leeds**

Tel: 0113 243 0203

**Sheffield**

Tel: 0114 243 1841

**Gateshead**

Tel: 0191 460 2233

**Manchester**

Tel: 0161 876 4337

**Glasgow**

Tel: 0141 892 0166

**Walsall**

Tel: 01922 403426

e-mail: [sales@scatts.co.uk](mailto:sales@scatts.co.uk)

web: [www.scatts.co.uk](http://www.scatts.co.uk)