



SAFETY MANUAL SIL

SMART Current Driver KCD2-SCD-(Ex)1(.SP), HiC2031



SIL2



With regard to the supply of products, the current issue of the following document is applicable: The General Terms of Delivery for Products and Services of the Electrical Industry, published by the Central Association of the Electrical Industry (Zentralverband Elektrotechnik und Elektroindustrie (ZVEI) e.V.) in its most recent version as well as the supplementary clause: "Expanded reservation of proprietorship"

1	Introduction	4
1.1	General Information	4
1.2	Intended Use	4
1.3	Manufacturer Information	5
1.4	Relevant Standards and Directives	5
2	Planning	6
2.1	System Structure	6
2.1.1	Low Demand Mode of Operation	6
2.1.2	High Demand or Continuous Mode of Operation	6
2.1.3	Safe Failure Fraction	6
2.2	Assumptions	7
2.3	Safety Function and Safe State	8
2.4	Characteristic Safety Values	8
3	Safety Recommendation	9
3.1	Interfaces	9
3.2	Configuration	9
3.3	Useful Life Time	9
3.4	Installation and Commissioning	10
4	Proof Test	11
4.1	Proof Test Procedure	11
5	Abbreviations	13

1 Introduction

1.1 General Information

This manual contains information for application of the device in functional safety related loops.

The corresponding data sheets, the operating instructions, the system description, the Declaration of Conformity, the EC-Type-Examination Certificate, the Functional Safety Assessment and applicable Certificates (see data sheet) are integral parts of this document.

The documents mentioned are available from www.pepperl-fuchs.com or by contacting your local Pepperl+Fuchs representative.

Mounting, installation, commissioning, operation, maintenance and disassembly of any devices may only be carried out by trained, qualified personnel. The instruction manual must be read and understood.

When a fault is detected within the device, it must be taken out of service and action taken to protect against accidental use. Devices shall only be repaired directly by the manufacturer. De-activating or bypassing safety functions or failure to follow the advice given in this manual (causing disturbances or impairment of safety functions) may cause damage to property, environment or persons for which Pepperl+Fuchs GmbH will not be liable.

The devices are developed, manufactured and tested according to the relevant safety standards. They must only be used for the applications described in the instructions and with specified environmental conditions, and only in connection with approved external devices.

1.2 Intended Use

The devices are available as safe area version(KCD2-SCD-1(.SP)) where they can be used as a signal conditioner providing isolation for non-intrinsically safe applications. Also the devices are available as hazardous area versions (KCD2-SCD-Ex1(.SP), HiC2031) allowing use as isolated barriers for intrinsic safety applications.

The device drives SMART I/ P converters, electrical valves, and positioners and provides isolation for the applications.

Digital signals are superimposed on the analog values at the field or control side and are transferred bi-directionally.

An open field circuit presents a high input impedance to the control side to allow lead breakage monitoring by control system.

In the KCD2-SCD-(Ex)1(.SP) test sockets for the connection of HART communicators are integrated into the terminals of the device.

The KC devices are available with screw terminals or spring terminals. The type code of the versions of the KC-devices with spring terminals has the extension ".SP".

The KCD2-SCD-(Ex)1(.SP) is a single device for DIN rail mounting while the HiC2031 is a plug-in device to be inserted into a specific Termination Board.

1.3 Manufacturer Information

Pepperl+Fuchs GmbH

Lilienthalstrasse 200, 68307 Mannheim, Germany

KCD2-SCD-1(.SP)

KCD2-SCD-Ex1(.SP)

HiC2031

Up to SIL2

1.4 Relevant Standards and Directives

Device specific standards and directives

- Functional safety IEC 61508 part 1 – 2, edition 2000:
Standard of functional safety of electrical/electronic/programmable electronic safety-related systems (product manufacturer)
- Electromagnetic compatibility:
 - EN 61326-1:2006
 - NE 21:2006

System specific standards and directives

- Functional safety IEC 61511 part 1 – 3, edition 2003:
Standard of functional safety: safety instrumented systems for the process industry sector (user)

2 Planning

2.1 System Structure

2.1.1 Low Demand Mode of Operation

If there are two loops, one for the standard operation and another one for the functional safety, then usually the demand rate for the safety loop is assumed to be less than once per year.

The relevant safety parameters to be verified are:

- the PFD_{avg} value (average **P**robability of **F**ailure on **D**emand) and the T_{proof} value (proof test interval that has a direct impact on the PFD_{avg})
- the SFF value (**S**afe **F**ailure **F**raction)
- the HFT architecture (**H**ardware **F**ault **T**olerance)

2.1.2 High Demand or Continuous Mode of Operation

If there is only one loop, which combines the standard operation and safety related operation, then usually the demand rate for this loop is assumed to be higher than once per year.

The relevant safety parameters to be verified are:

- the PFH value (**P**robability of dangerous **F**ailure per **H**our)
- Fault reaction time of the safety system
- the SFF value (**S**afe **F**ailure **F**raction)
- the HFT architecture (**H**ardware **F**ault **T**olerance architecture)

2.1.3 Safe Failure Fraction

The safe failure fraction describes the ratio of all safe failures and dangerous detected failures to the total failure rate.

$$\text{SFF} = (\lambda_s + \lambda_{dd}) / (\lambda_s + \lambda_{dd} + \lambda_{du})$$

A safe failure fraction as defined in EN 61508 is only relevant for elements or (sub)systems in a complete safety loop. The device under consideration is always part of a safety loop but is not regarded as a complete element or subsystem.

For calculating the SIL of a safety loop it is necessary to evaluate the safe failure fraction of elements, subsystems and the complete system, but not of a single device.

Nevertheless the SFF of the device is given in this document for reference.

2.2 Assumptions

The following assumptions have been made during the FMEDA analysis:

- The device shall claim less than 10 % of the total failure budget for a SIL2 safety loop.
- For a SIL2 application operating in Low Demand Mode the total PFD_{avg} value of the SIF (**S**afety **I**nstrumented **F**unction) should be smaller than 10^{-2} , hence the maximum allowable PFD_{avg} value would then be 10^{-3} .
- Failure rate based on the Siemens SN29500 data base.
- Failure rates are constant, wear out mechanisms are not included.
- External power supply failure rates are not included.
- The devices are not protected against power supply failures. It is within the responsibility of the user to ensure that low supply voltages are detected and adequate reaction on this fault is implemented.
- The safety-related device is considered to be of type **A** components with a Hardware Fault Tolerance of **0**.
- Since the loop has a Hardware Fault Tolerance of **0** and it is a type **A** component, the SFF must be > 60 % according to table 2 of IEC 61508-2 for a SIL2 (sub)system.
- It is assumed that the device will be used under average industrial ambient conditions, which are comparable with the classification "stationary mounted" in MIL-HDBK-217F. Alternatively, the following ambient conditions are assumed:
 - IEC 60654-1 Class C (sheltered location) with temperature limits in the range of the manufacturer's specifications and an average temperature of 40 °C over a long period. A moisture level within the manufacturer's specifications is assumed. For a higher average temperature of 60 °C, the failure rates must be multiplied by a factor of 2.5 based on empirical values. A similar multiplier must be used if frequent temperature fluctuations are expected.
- During the operation any change of the configuration (modification of DIP switch settings) is not allowed.
- It is assumed that any safe failures that occur (e.g., output in safe condition) will be corrected within eight hours (e.g., correction of a sensor fault).
- While the device is being repaired, measures must be taken to maintain the safety function (e.g., by using a replacement device).
- The HART protocol is only used for setup, calibration, and diagnostic purposes, not during operation.

2.3 Safety Function and Safe State

Safety Function

The safety function of the device is fulfilled, as long as the output repeats the input current (4 mA ... 20 mA) with a tolerance of 2 %.

Safe State

The safe state is defined as the output being < 4 mA.

Reaction Time

The reaction time for all safety functions is < 100 ms.

2.4 Characteristic Safety Values

Parameters acc. to IEC 61508	Values
Assessment type and documentation	Full assessment
Device type	A
Mode of operation	Low Demand Mode or High Demand Mode
HFT	0
SIL	2
Safety function	Signal transfer
λ_s	281 FIT
λ_{dd}	0 FIT
λ_{du}	67 FIT
$\lambda_{no\ effect}$	124 FIT
$\lambda_{total\ (safety\ function)}$	348 FIT
$\lambda_{not\ part}$	68 FIT
SFF	80.7 %
MTBF ¹	274 years
PFH	6.70×10^{-8} 1/h
PFD _{avg} for T _{proof} = 1 year	2.93×10^{-4}
PFD _{avg} for T _{proof} = 2 years	5.86×10^{-4}
PFD _{avg} for T _{proof} = 5 years	1.46×10^{-3}
Reaction time ²	< 100 ms

¹ acc. to SN29500. This value includes failures which are not part of the safety function.

² Time between fault detection and fault reaction.

Table 2.1

The characteristic safety values like PFD, SFF, HFT and T_{proof} are taken from the SIL report/FMEDA report. Please note, PFD and T_{proof} are related to each other.

The function of the devices has to be checked within the proof test interval (T_{proof}).

3 Safety Recommendation

3.1 Interfaces

The device has the following interfaces. For corresponding terminals see data sheet.

- Safety relevant interfaces: input I, output I
 - Non-safety relevant interfaces: none
- The HART communication is not relevant for functional safety.

3.2 Configuration

A configuration of the device is not necessary and not possible.

3.3 Useful Life Time

Although a constant failure rate is assumed by the probabilistic estimation this only applies provided that the useful life time of components is not exceeded. Beyond this useful life time, the result of the probabilistic calculation is meaningless as the probability of failure significantly increases with time. The useful life time is highly dependent on the component itself and its operating conditions – temperature in particular (for example, the electrolytic capacitors can be very sensitive to the working temperature).

This assumption of a constant failure rate is based on the bathtub curve, which shows the typical behavior for electronic components.

Therefore it is obvious that failure calculation is only valid for components that have this constant domain and that the validity of the calculation is limited to the useful life time of each component.

It is assumed that early failures are detected to a huge percentage during the installation period and therefore the assumption of a constant failure rate during the useful life time is valid.

However, according to IEC 61508-2, a useful life time, based on experience, should be assumed. Experience has shown that the useful life time often lies within a range period of about 8 ... 12 years.

As noted in DIN EN 61508-2:2011 note NA4, appropriate measures taken by the manufacturer and operator can extend the useful lifetime.

Our experience has shown that the useful life time of a Pepperl+Fuchs product can be higher

- if there are no components with reduced life time in the safety path (like electrolytic capacitors, relays, flash memory, opto coupler) which can produce dangerous undetected failures and
- if the ambient temperature is significantly below 60 °C.

Please note that the useful life time refers to the (constant) failure rate of the device.

3.4 Installation and Commissioning

During installation all aspects regarding the SIL level of the loop must be considered. The safety function must be tested to ensure the expected outputs are given. When replacing a device, the loop must be shut down. In all cases, devices must be replaced by the same type.

4 Proof Test

4.1 Proof Test Procedure

According to IEC 61508-2 a recurring proof test shall be undertaken to reveal potentially dangerous failures that are otherwise not detected by diagnostic tests.

The functionality of the subsystem must be verified at periodic intervals depending on the applied PFD_{avg} in accordance with the data provided in this manual. See chapter 2.4.

It is under the responsibility of the operator to define the type of proof test and the interval time period.

With the following instructions a proof test can be performed which will reveal almost all of the possible dangerous faults (diagnostic coverage > 90 %).

- The ancillary equipment required:
 - Digital multimeter with an accuracy better than 0.1 %
For the proof test of the intrinsic safety side of the devices, a special digital multimeter for intrinsically safe circuits must be used.
Intrinsically safe circuits that were operated with non-intrinsically safe circuits may not be used as intrinsically safe circuits afterwards.
 - Power supply set at nominal voltage of 24 V DC
 - Process calibrator with mA current source/sink feature (accuracy better than 20 μ A)
- The entire measuring loop must be put out of service and the process held in safe condition by means of other measures.
- Prepare a test set-up for testing the KCD2-SCD-(Ex)1(.SP) device (→ see Figure 4.1 on page 12) or for testing the HiC2031 device (→ see Figure 4.2 on page 12).
- Restore the safety loop. Any by-pass of the safety function must be removed.

Step No.	Set input value (mA)	Measurement point
		Output value (mA)
1	20.00	20.00 \pm 0.4
2	12.00	12.00 \pm 0.4
3	4.00	4.00 \pm 0.4
4	23.00	23.00 \pm 0.4
5	0	< 0.3
6	12.00	

Table 4.1 Steps to be performed for the proof test

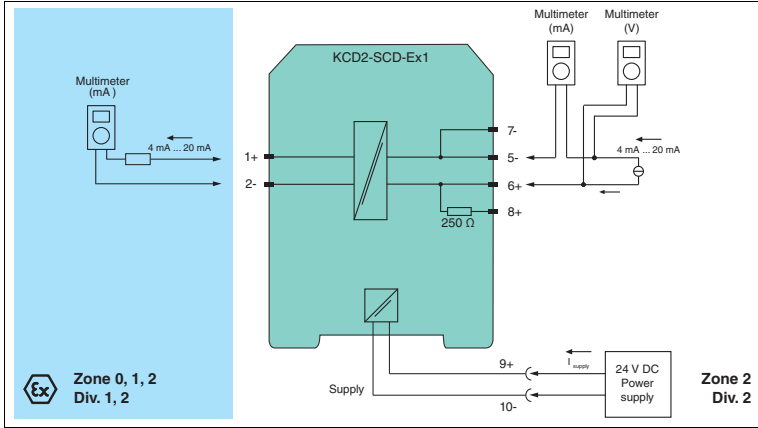


Figure 4.1 Proof test set-up KCD2-SCD-(Ex)1(.SP)

Usage in Zone 0, 1, 2/Div. 1, 2 only for KCD2-SCD-Ex1(.SP)

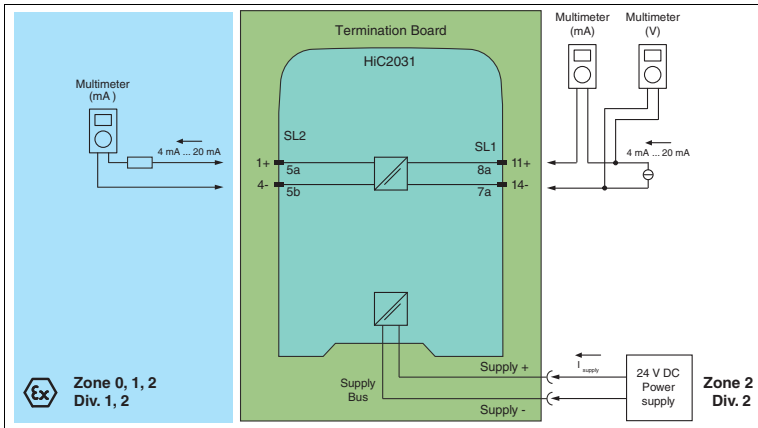


Figure 4.2 Proof test set-up for HiC2031



Tip

Normally the easiest way to test H-System modules is by using a stand-alone HiCTB08-UNI-SC-SC Termination Board. The tester then has no need to disconnect wires in the existing application, so subsequent miswiring of the module is prevented.

5 Abbreviations

DCS	D istributed C ontrol S ystem
ESD	E mergency S hutdown
FIT	F ailure I n T ime in 10^{-9} 1/h
FMEDA	F ailure M ode, E ffects and D iagnostics A nalysis
λ_s	Probability of safe failure
λ_{dd}	Probability of dangerous detected failure
λ_{du}	Probability of dangerous undetected failure
$\lambda_{no\ effect}$	Probability of failures of components in the safety path that have no effect on the safety function
$\lambda_{not\ part}$	Probability of failure of components that are not in the safety path
$\lambda_{total\ (safety\ function)}$	Safety function
HFT	H ardware F ault T olerance
MTBF	M ean T ime B etween F ailures
MTTR	M ean T ime T o R epair
PFD_{avg}	A verage P robability of F ailure on D emand
PFH	P robability of dangerous F ailure per H our
PTC	P roof T est C overage
SFF	S afe F ailure F raction
SIF	S afety I nstrumented F unction
SIL	S afety I ntegrity L evel
SIS	S afety I nstrumented S ystem
T_{proof}	P roof T est I nterval





PROCESS AUTOMATION – PROTECTING YOUR PROCESS



Worldwide Headquarters

Pepperl+Fuchs GmbH
68307 Mannheim · Germany
Tel. +49 621 776-0
E-mail: info@de.pepperl-fuchs.com

For the Pepperl+Fuchs representative
closest to you check www.pepperl-fuchs.com/contact

www.pepperl-fuchs.com

Subject to modifications
Copyright PEPPERL+FUCHS • Printed in Germany

 **PEPPERL+FUCHS**
PROTECTING YOUR PROCESS



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk