



- * High visibility blue backlit display
- * Plug-in optional modules (2 max.)
- * 60mm deep without optional modules
- * 80mm deep with optional modules
- * 1A / 5A secondary CT
- * Direct access information keys
- * Operating temperature from -10°C to +55°C
- * Panel mounting 96 x 96 mm
- * Approvals UL, CSA, CE
- * IEC62053-22 class 0.5S
- * Degree of protection IP54

Socomec

Diris A20

Multifunction Energy Meters

Single Pulsed Output



Base Units

Part Number	Description	Input Voltage
48250A20	Diris A20 Base Unit	110-400 V AC / 120-350 V DC Auxiliary Supply

Optional Output Modules


Part Number	Description
48250080	Single Output Pulse Module
48250082	Communication Module 2 or 3 Wire RS485 + JBUS/MODBUS Protocol

Plug and Display

Optional plug-in modules (metering and communication) enable additional functions to be added to the base unit enabling performance verses cost to be optimised whilst providing onsite flexibility for the end user.

4 Direct Access Keys to Read:

- I Current
- U/F Voltage and Frequency
- P/PF Powers and Power factor
- E Energy Metering

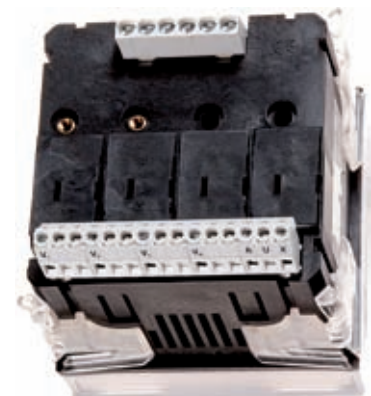

Leeds

Tel: 0113 243 0203

Sheffield

Tel: 0114 243 1841

Gateshead

Tel: 0191 460 2233

Manchester

Tel: 0161 876 4337

Glasgow

Tel: 0141 892 0166

Walsall

Tel: 01922 403426

e-mail: sales@scatts.co.uk

web: www.scatts.co.uk