



SCATTERGOOD & JOHNSON LTD



ELECTRICAL ENGINEERING AND FLUID CONTROL DISTRIBUTORS

CEAG

Zone 1 & 21 Fluorescent Lighting


Explosionproof eLLK92 Fluorescent Luminaires

Certification Information

Certification Number PTB96ATEX2144
 Approved to Ex II 2GD EEx ed IIC T4
 Ingress Protection IP66
 Ambient Temperature Range -20 up to +50 °C (+40°C on 2x58w)

Features

Approved for gas & dust applications
 Electronic HF control gear with independent lamp operation
 Suitable for use on 110-254v AC operation, no linking required
 Automatic isolation upon opening, via hexagon Sw13 tool
 Glass reinforced polyester body with polycarbonate diffuser
 Multiple locking points on diffuser, can be hinged from both sides
 6mm terminals for live, neutral & earth, through wired
 Two off 20mm entries each end, internally earthed

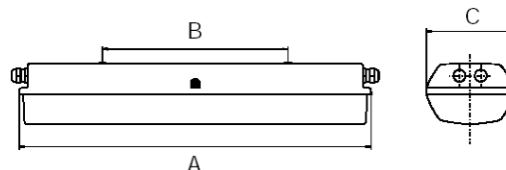

Order Reference	Description	Dimensions			Weight	Price
		A	B	C		
12265875111	2x18w Fluorescent Luminaire, 110-254v 47-63Hz	760mm	400mm	188mm	4.6kg	P.O.A.
12266875111	2x36w Fluorescent Luminaire, 110-254v 47-63Hz	1360mm	700mm	188mm	6.7kg	P.O.A.
12267875111	2x58w Fluorescent Luminaire, 110-254v 47-63Hz	1660mm	700mm	188mm	8.0kg	P.O.A.
32485000005	Hexagon SW13 Tool	-	-	-	-	P.O.A.
22480092000	D92 Ceiling Mounting Brackets (Pair)	-	-	-	-	P.O.A.


Explosionproof eLLK92nib Emergency Fluorescent Luminaires

Certification Information

Certification Number PTB96ATEX2144
 Approved to Ex II 2GD EEx edm ib IIC T4
 Ingress Protection IP66
 Ambient Temperature Range -5 up to +50 °C

Features

Approved for gas & dust applications
 Electronic HF control gear with independent lamp operation
 Automatic 5 minute weekly and 35 minute quarterly function test
 Microprocessor monitors charging & discharging of the battery
 Five green LED's indicate the battery status and capacity
 Automatic isolation upon opening, via hexagon Sw13 tool
 Glass reinforced polyester body with polycarbonate diffuser
 Multiple locking points on diffuser, can be hinged from both sides
 Maintained or non-maintained or switchable
 Remote/Black start function available as standard.
 6mm terminals for live, neutral & earth, through wired
 Two off 20mm entries each end, internally earthed

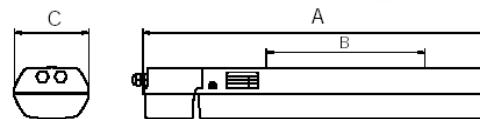

In emergency operation one lamp is lit, the emergency duration can be set on site to 1.5 or 3 hours depending upon light levels
 18w- approx. 1.5h, 90% / 3.0h, 45%. 36w- approx. 1.5h, 45%

Order Reference	Description	Dimensions			Weight	Price
		A	B	C		
12260879111	2x18w Emergency Luminaire, 220-254v 47-63Hz	900mm	400mm	188mm	10.0kg	P.O.A.
12261879111	2x36w Emergency Luminaire, 220-254v 47-63Hz	1500mm	700mm	188mm	12.0kg	P.O.A.
32485000005	Hexagon SW13 Tool	-	-	-	-	P.O.A.
22480092000	D92 Ceiling Mounting Brackets (Pair)	-	-	-	-	P.O.A.

Leeds Tel: 0113 243 0203	Sheffield Tel: 0114 243 1841	Gateshead Tel: 0191 460 2233	Manchester Tel: 0161 876 4337	Glasgow Tel: 0141 892 0166	Walsall Tel: 01922 403426
email: sales@scatts.co.uk			web: www.scatts.co.uk		



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk