




- * Heavy duty metal housing
- * 6A switch rating
- * Ingress protection IP67 (Nema 4, 6P & 13 oiltight)
- * Operating temperature -18°C to +110°C (Coil Spring/Cats Whisker -18°C to +54°C)
- * Castle lock head design for high durability
- * CE, UL, CSA Approvals

Allen Bradley

802T 2 Circuit Plug-In Limit Switches

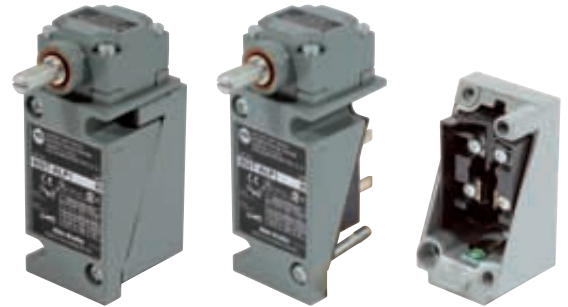

Conduit Entry

802T 2 Circuit Plug-In Limit Switch Bases

Style	Part Number	Description	Entry	Contacts	
				Configuration	Action
	802T-X7S6	Plug-In Base	M20	1 N/O + 1 N/C 2 Circuit	Snap Action
	802T-X7		½" NPT		
	802T-X7S7		PG 13.5		

802T 2 Circuit Plug-In Limit Switch Operator Bodies

Style	Part Number	Description	Operation	Contacts	
				Configuration	Action
	802T-AP1	Rotary Motion	Spring Return	1 N/O + 1 N/C 2 Circuit	Snap Action
	802T-A1P1	Rotary Motion, CW			
	802T-A2P1	Rotary Motion, CCW			
	802T-HP1	Rotary Motion	High Force		
	802T-ALP1	Rotary Motion	Low Force		
	802T-AMP1	Rotary Motion	Maintained		
	802T-BP1	Top Pin Plunger	Spring Return	1 N/O + 1 N/C 2 Circuit	Snap Action
	802T-CP1	Side Pin Plunger			
	802T-DP1	Top Roller Plunger			
	802T-KP1	Side Roller Plunger			
	802T-K1P1	90° Side Roller Plunger			
	802T-WSP1	Cats Whisker Nylon	Spring Return		
	802T-WS1P1	Cats Whisker Wire			
	802T-CWP1	Coil Spring			

N.B. Levers for Rotary Motion switches can be found on page 17

Leeds
Tel: 0113 243 0203

Sheffield
Tel: 0114 243 1841

Gateshead
Tel: 0191 460 2233

Manchester
Tel: 0161 876 4337

Glasgow
Tel: 0141 892 0166

Walsall
Tel: 01922 403 426

e-mail: sales@scatts.co.uk

web: www.scatts.co.uk