

Transparent Object Detection Sensor

E3S-R


- Senses glass wafers and LCD glass circuit boards.



CE

Applications

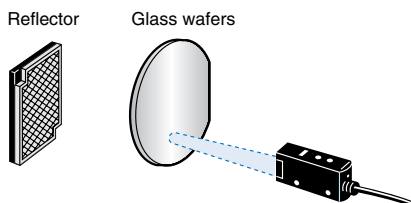


Sensing of Glass Wafers and LCD Glass Circuit Bottles



Ordering Information

Sensors

 Red light

| Sensor type | Shape | Connection method | Sensing distance | | | | Model | |
|------------------------|---|-------------------|---|--|--|--|------------|------------|
| | | | | | | | NPN output | PNP output |
| Retroreflective Models | Horizontal  | Pre-wired |  1m [100mm] * | | | | E3S-R11 | E3S-R31 |
| | | Connector type | | | | | E3S-R16 | E3S-R36 |
| | Vertical  | Pre-wired | | | | | E3S-R61 | E3S-R81 |
| | | Connector type | | | | | E3S-R66 | E3S-R86 |

* Values in parentheses indicate the minimum required distance between the sensor and reflector.







Note: Stable detection may not be possible of some glass wafer materials. Be sure to test whether the work can be detected.

Accessories (Order Separately)

Reflectors



| Name | Sensing distance | Model | Quantity | Remarks |
|------------|------------------------------|--------|----------|----------------------------|
| Reflectors | Refer to ratings/performance | E39-R1 | 1 | Supplied with the product. |

Clamps/Other

| Shape | Model | Quantity | Remarks |
|---|---------|----------|--|
|  | E39-L69 | 1 | Included as an accessory for the horizontal model. |
|  | E39-L70 | 1 | Included as an accessory for the vertical model. |
|  | E39-L93 | One set | Sensor adjuster: Easy mounting and adjustment on aluminum frame and rail of conveyors and other equipment. |
|  | E39-L97 | 1 | Horizontal protective cover clamp. |
|  | E39-L98 | 1 | Vertical protective cover clamp. |
|  | E39-L60 | 1 | Contact mounting plate: Accessory to E3S-R□. |

Note: 1. If a through-beam model is used, order two Mounting Brackets for the emitter and receiver respectively.
2. For details, refer to "Mounting bracket list".

Sensor I/O Connectors

| Cable | Shape | Cable length | | Model |
|----------------|---|--------------|-------------|-----------------|
| Standard cable | Straight  | 2 m | 3-wire type | XS2F-D421-DC0-A |
| | | 5 m | | XS2F-D421-GC0-A |
| | L-shape  | 2 m | | XS2F-D422-DC0-A |
| | | 5 m | | XS2F-D422-GC0-A |

Rating/performance


| Item | Sensor type | | Retroreflective Models (with M.S.R) |
|----------------------------|--|----------------------------------|-------------------------------------|
| | Model | NPN output | E3S-R11/-R16/-R61/-R66 |
| | | PNP output | E3S-R31/-R36/-R81/-R86 |
| Sensing distance | 1 m (100 mm) *1(When using the E39-R1) | | |
| Standard sensing object | 75-mm dia. or larger opaque LCD glass plate (thickness: 0.7 mm) | | |
| Directional angle | 3 to 10° | | |
| Light source (wave length) | Red LED (700 nm) | | |
| Power supply voltage | 10 to 30 V DC (including 10% ripple (p- p)) | | |
| Current consumption | 30 mA max. | | |
| Control output | Load supply voltage: 30 VDC or less, load current: 100 mA or less (residual voltage of 1 V or less), NPN open collector output, Light ON / Dark ON switching | | |
| Protective circuits | Reverse polarity protection, output short-circuit protection, mutual interference prevention | | |
| Response time | Operation or reset: 1 ms max. | | |
| Sensitivity adjustment | 2-revolution endless volume | | |
| Ambient illuminance | Incandescent lamp: 5,000 lux max. Sunlight 10,000 lux max. | | |
| Ambient temperature | Operating: 0 to +40°C, storage: -40 to +70°C (no ice formation or condensation) | | |
| Ambient humidity | Operating: 35 to 85% RH, Storage: 35 to 95% RH (no condensation) | | |
| Insulation resistance | 20 M min. at 500 VDC | | |
| Dielectric strength | 1,000 VAC at 50/60 Hz for 1 minute | | |
| Vibration resistance | 10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y, and Z directions | | |
| Shock resistance | Destruction: 500 m/s ² for 3 times each in X, Y, and Z directions | | |
| Protective structure | IEC 60529 IP67 | | |
| Connection method | Pull-out cable type (standard cord length: 2 m) / connector type | | |
| Weight (Packed state) | Approximately 110 g (pull-out cable type) Approximately 60 g (connector type) | | |
| Material | Case | PBT (polybutylene terephthalate) | |
| | Lens | Denatured polyarylate | |
| | Mounting Brackets | Stainless steel (SUS304) | |
| Accessories | Clamps (with screws), operation manual, reflector | | |

*1. Values in parentheses indicate the minimum required distance between the sensor and reflector.

Characteristic data (typical)

Operating Range

E3S-R11, E3S-R61+ E39R1

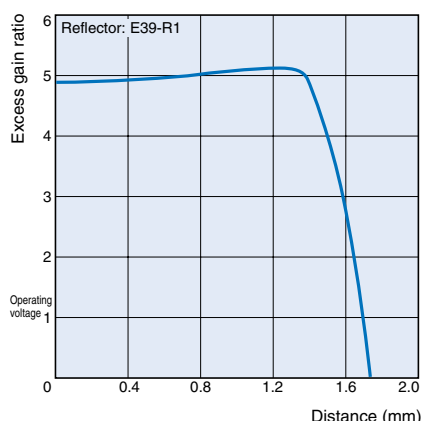

Changes in light intensity when detecting various transparent objects (Note 1)

The following are the permeation rates of a various transparent objects on condition that a permeation rate of 100 means that there is no object within the sensing distance of the E3S-R. The permeation rate of any type of object sensed by the E3S-R must be as low as possible for the stable sensing of the object. Before using the E3S-R to sense objects, use samples of the objects to check if the E3S-R can sense the samples easily.

| Sensing object Shape | Model Passage position | E3S-R11, R61, R81; E3S-R16, R66, R36, R86 |
|------------------------|----------------------------|--|
| | | Center |
| Glass plate | 50 x 50 t = 0.5 | 82 |
| | 50 x 50 t = 1 | 74 |
| | 50 x 50 t = 2 | 73 |
| | 50 x 50 t = 3 | 62 |
| | 50 x 50 t = 5 | 53 |
| Liquid crystal glass | t = 0.5 (98% transparency) | 86 |
| | t = 0.7 (95% transparency) | 81 |
| | t = 1.1 (91% transparency) | 75 |
| Operating range | | 95 max. |
| Stable operating range | | 90 max. |

Note: 1. The sensing distance of each model was set to the rated sensing distance.

2. The permeability values were checked with light with a wavelength of 700 nm.

Output Circuit Diagram


NPN output

| Model | Operating status of output transistor | Timing chart | Mode selection switch | Output circuit |
|--|---------------------------------------|---|-----------------------|---|
| E3S-R11 E3S-R61 E3S-R16 E3S-R66 | Light ON | Incident Interrupted Light indicator (red) ON OFF Output transistor ON OFF Load (Relay) Operate Reset (Between brown and black) | L•ON | <p>Connector Pin arrangement</p> <p>Note: Terminal 2 is not used.</p> |
| | Dark ON | Incident Interrupted Light indicator (red) ON OFF Output transistor ON OFF Load (Relay) Operate Reset (Between brown and black) | D•ON | <p>Connector Pin arrangement</p> <p>Note: Terminal 2 is not used.</p> |

PNP output

| Model | Operating status of output transistor | Timing chart | Mode selection switch | Output circuit |
|--|---------------------------------------|--|-----------------------|---|
| E3S-R31 E3S-R36 E3S-R81 E3S-R86 | Light ON | Incident Interrupted Light indicator (red) ON OFF Output transistor ON OFF Load (Relay) Operate Reset (Between blue and black) | L•ON | <p>Connector Pin arrangement</p> <p>Note: Terminal 2 is not used.</p> |
| | Dark ON | Incident Interrupted Light indicator (red) ON OFF Output transistor ON OFF Load (Relay) Operate Reset (Between blue and black) | D•ON | <p>Connector Pin arrangement</p> <p>Note: Terminal 2 is not used.</p> |

Connectors (Sensor I/O connectors)

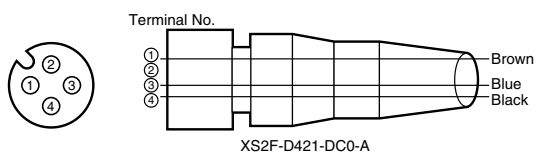

| Class | Wire, outer jacket color | Connector pin No. | Application |
|--------|--------------------------|-------------------|-------------|
| For DC | Brown | ① | +V |
| | --- | ② | --- |
| | Blue | ③ | 0V |
| | Black | ④ | Output |

Note: Pin 2 is not used.

Precautions

Correct Use

- For adjustment
- The passage point of the detection object should be the central point between the reflective plate and the photoelectric switch. If too close to the reflective plate, an error may result.
- To obtain sufficient detection performance, the E39-R1 must be used for the reflective plate unless otherwise specified.

Dimensions (Unit: mm)


Sensors

Horizontal type


Pre-wired

E3S-R11



E3S-R31



With Mounting Blanket Attached

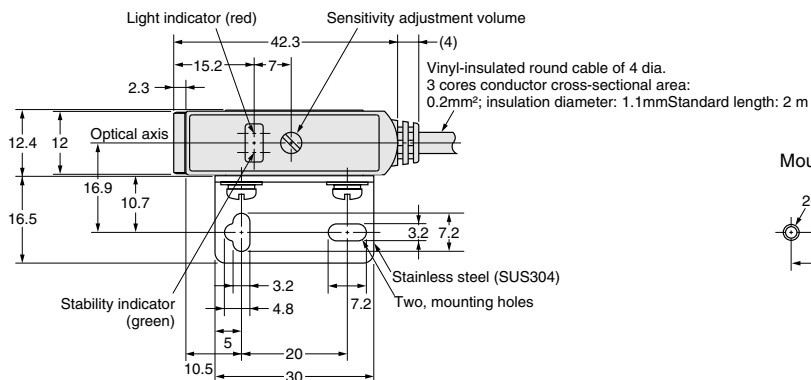

Mounting Holes

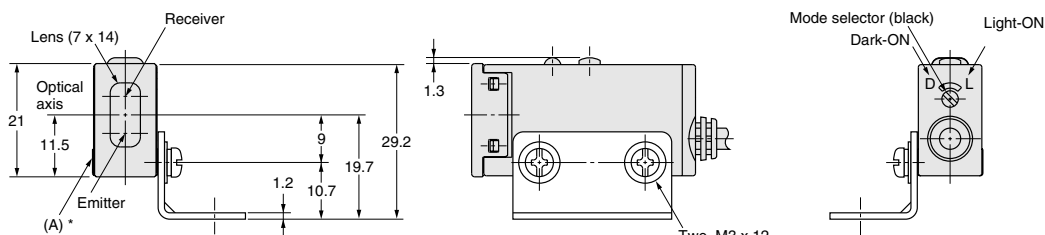


* The Mounting Bracket can also be used on side A.


Connector type

E3S-R16



E3S-R36



With Mounting Blanket Attached

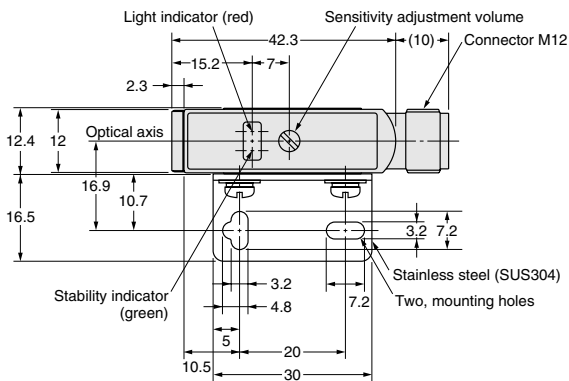

Mounting Holes

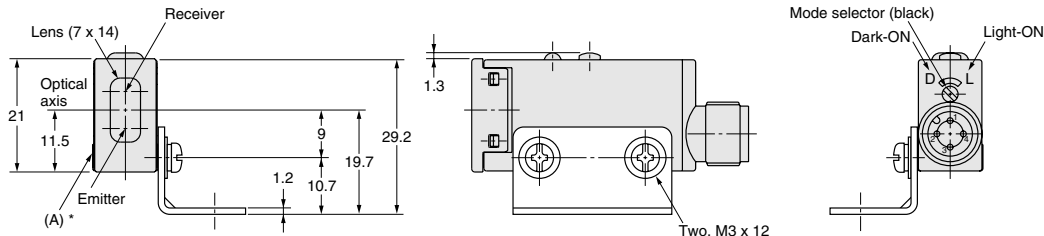


* The Mounting Bracket can also be used on side A.


Vertical type

Pre-wired

E3S-R61
E3S-R81




With Mounting Blanket Attached

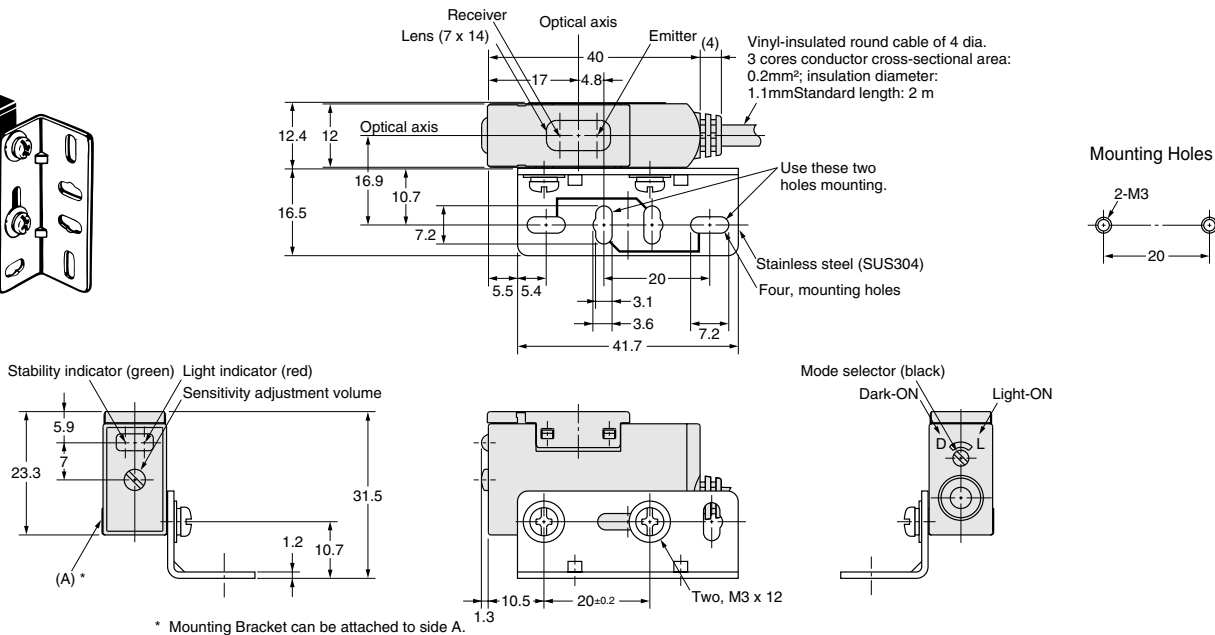


Connector type

E3S-R66
E3S-R86



With Mounting Blanket Attached

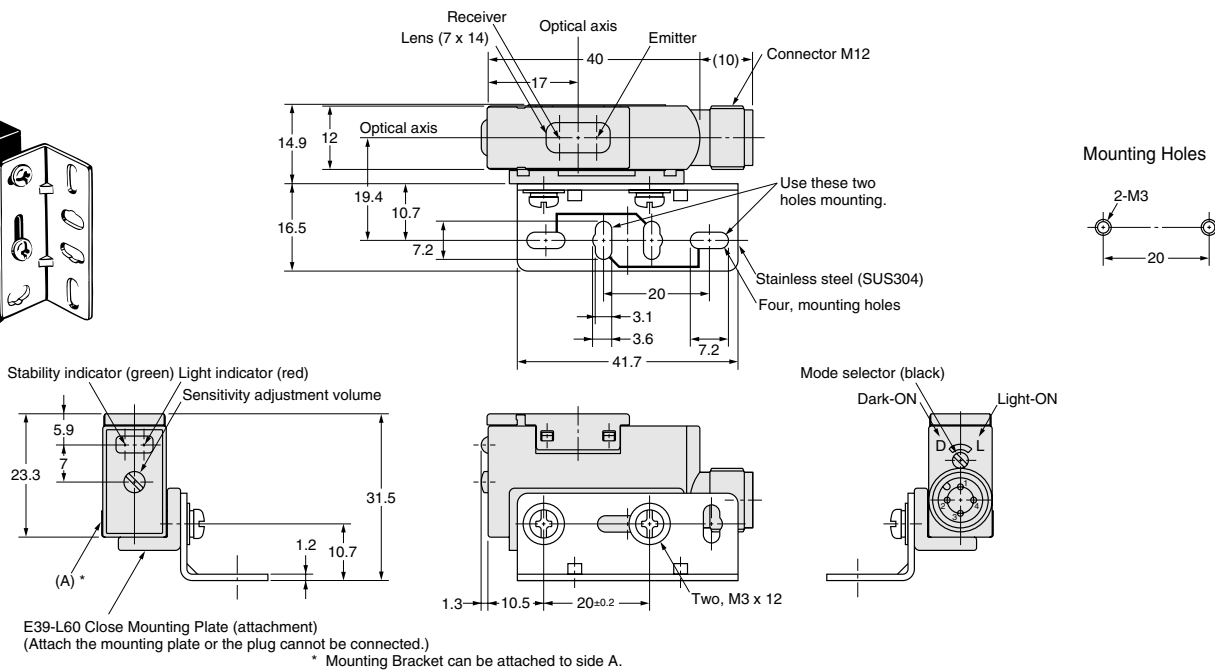

Accessories (Order Separately)

H-5

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

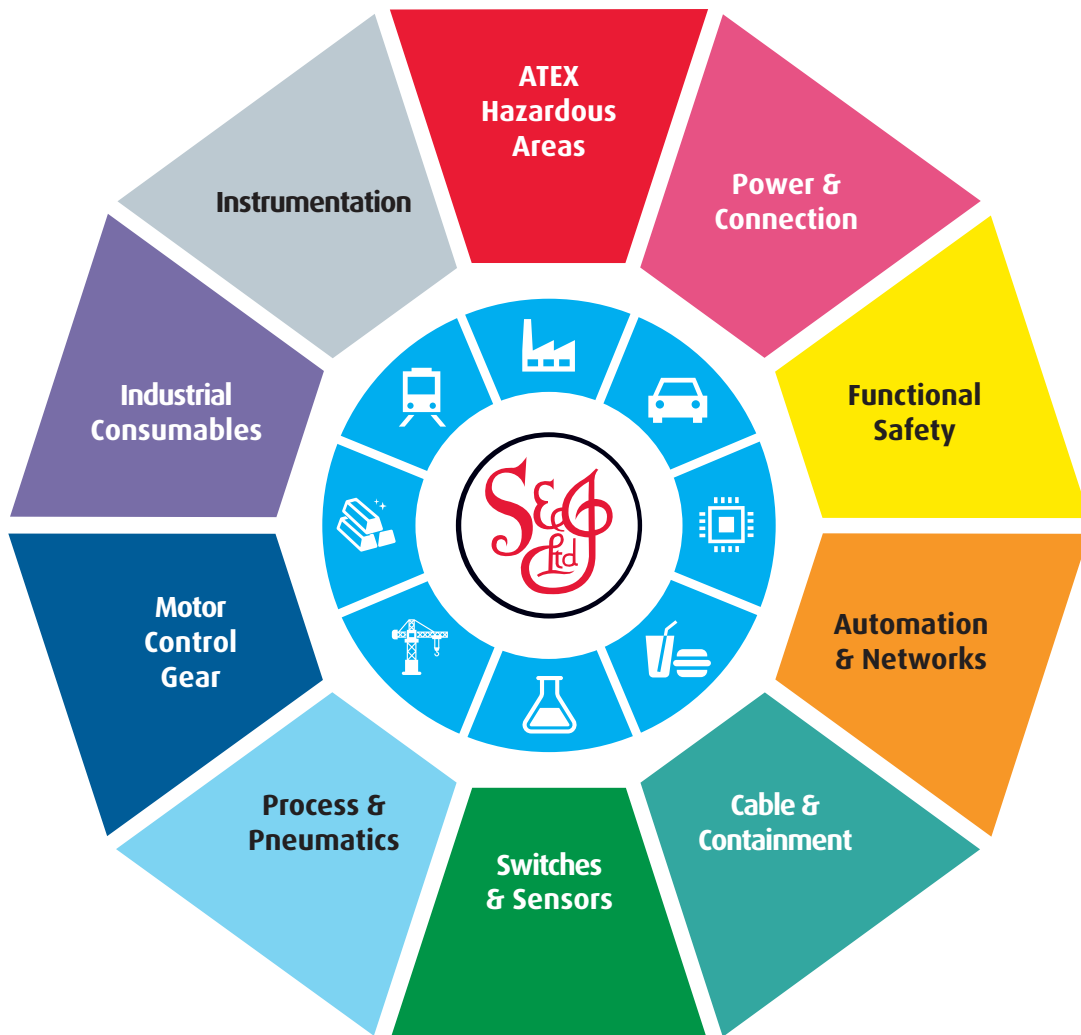

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk