

# Digital Modules ASi, IP67, M12



2 x 2 connectors for profile cable

2 color LEDs per output, state (yellow), overload (red) (optional)




(figure similar)




Figure	Type	Inputs digital	Outputs digital	M12 connection (1)	Input voltage (sensor supply) (2)	Output voltage (actuator supply) (3)	ASi connection (4)	ASi address (5)	Max. output current	Art. no.
	IP67, 4 x M12	4	—	standard	out of ASi	—	ASi profile cable	1 single slave	—	<b>BWU3682</b>
	IP67, 8 x M12	4	3 x electronic	standard	out of ASi	out of AUX	ASi profile cable	1 AB slave	2 A	<b>BWU3701</b>
	IP67, 8 x M12	4	4 x electronic	standard	out of ASi	out of AUX	ASi profile cable	1 single slave	2 A	<b>BWU3686</b>
	IP67, 8 x M12	8	—	dual (Y)	out of ASi	—	ASi profile cable	2 AB slaves	—	<b>BWU3523</b>

(1) **M12 wiring:** either as a standard wiring or dual (Y) wiring.

**standard wiring**

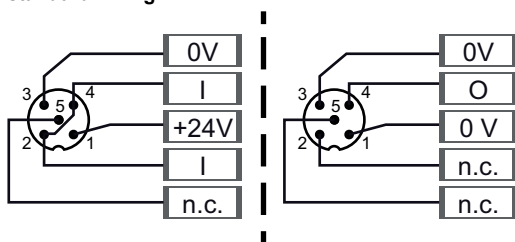

**dual (Y) wiring**

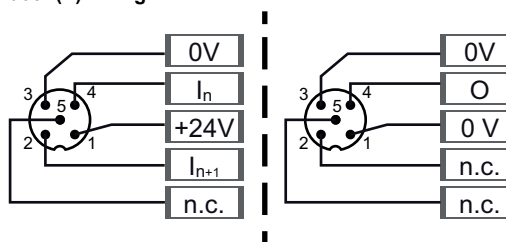

- (2) **Input voltage (sensor supply):** inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.
- (3) **Output voltage (actuator supply):** outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential
- (4) **ASi connection:** the connection to ASi as well to AUX (auxiliary 24 V power) is made via yellow resp. black ASi profile cable with piercing technology or via M12 socket (in IP20 via clamps).
- (5) **ASi address:** 1 AB Slave (max. 62 AB Slaves/ASi network), 2 AB Slaves (max. 31 modules with 2 AB Slaves), Single Slaves (max. 31 Single Slaves/ASi network), mixed use allowed.  
For modules with two slaves the second slave is turned off as long as the first slave is addressed to address "0".  
Upon request, slaves are available with specific ASi Slave profiles.

# Digital Modules ASi, IP67, M12



Article No.	BWU3523		BWU3682		BWU3686		BWU3701	
<b>General data</b>								
Device type	input				input / output			
<b>Connection</b>								
ASi/AUX connection	profile cable and piercing							
Periphery connection	M12, dual (Y) wiring		M12, standard wiring					
Length of connector cable	unlimited <sup>(1)</sup>							
<b>ASi</b>								
Profile	slave 1: S-0.A.2 (ID1=7 default) slave 2: S-0.A.2 (ID1=7 default)		S-0.0.E (ID1=F fixed)		S-7.0.E (ID1=F default)		S-7.A.0 (ID1=7 default)	
Address	2 AB slaves		1 single slave				1 AB slave	
Required Master profile	≥M3		≥M0				≥M3	
As of ASi specification	2.1		2.0				2.1	
Operating voltage	30 V (18 ... 31.6 V)							
Max. current consumption	270 mA		165 mA					
Max. current consumption without sensor/ actuator supply	70 mA		45 mA					
<b>AUX</b>								
Operating voltage	-				24 V (18 ... 30 V)			
Max. current consumption	-				8 A		6 A	
<b>Input</b>								
Number	8			4				
Power supply	out of ASi							
Sensor supply	short-circuit and overload protected according to EN 61131-2							
Power supply of attached sensors	up to +40 °C	200 mA <sup>(2)</sup>		120 mA <sup>(5)</sup>				
	at +55 °C	150 mA <sup>(2)</sup>		100 mA <sup>(5)</sup>				
	at +70 °C	100 mA <sup>(2)</sup>		80 mA <sup>(5)</sup>				
Switching threshold	U < 5 V (low) U > 15 V (high)							
<b>Output</b>								
Number	-				4		3	
Power supply	-				out of AUX			
Output	-				short-circuit and overload protected according to EN 61131			
Max. output current	up to +40 °C	-		2 A per output, Σ (Out) 8 A <sup>(6)</sup>		2 A per output, Σ (Out) 6 A <sup>(6)</sup>		
	at +55 °C	-		1,5 A per output, Σ (Out) 6 A <sup>(6)</sup>		1,5 A per output, Σ (Out) 4,5 A <sup>(6)</sup>		
	at +70 °C	-		1 A per output, Σ (Out) 4 A <sup>(6)</sup>		1 A per output, Σ (Out) 3 A <sup>(6)</sup>		

# Digital Modules ASi, IP67, M12




Article No.	BWU3523	BWU3682	BWU3686	BWU3701
<b>Display</b>				
LED ASi (green)	on: ASi voltage on flashing: ASi voltage on, but peripheral fault <sup>(3)</sup> or address 0 off: no ASi voltage			
LED ASi/FLT 1 (red/green)	green: slave online red: slave offline yellow/red flashing: address 0 red/green flashing: peripheral fault <sup>(3)</sup>	-		
LED ASi/FLT 2 (red/green)	green: slave online red: slave offline yellow/red flashing: address 0 red/green flashing: peripheral fault <sup>(3)</sup> red flashing: slave 2 is switched off, because slave 1 is offline	-		
LED FLT/FAULT (red)	on: slave address 0 or slave offline flashing: peripheral fault <sup>(3)</sup> off: slave online			
LED AUX (green)	-		on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX	
LEDs I1 ... In (yellow)	state of inputs I1 ... I8	state of inputs I1 ... I4		
LEDs O1 ... On (yellow)	-		state of outputs O1 ... O4	state of outputs O1 ... O3
<b>Environment</b>				
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529			
Operating altitude	max. 2000 m			
Ambient temperature	-30 °C ... +55 °C (up to max. +70 °C) <sup>(2)</sup> <sup>(4)</sup> <sup>(5)</sup> <sup>(6)</sup>			
Storage temperature	-25 °C ... +85 °C			
Housing	plastic, for screw mounting	plastic, for DIN rail mounting	plastic, for screw mounting	
Pollution degree	2			
Protection category	IP67			
Tolerable loading referring to humidity	according to EN 61131-2			
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2			
Max. tolerable vibration stress	5 ... 8 Hz 50 mm <sub>pp</sub> /8 ... 500 Hz 6g, acc. EN 61131-2			
Insulation voltage	≥500 V			
Weight	200 g	100 g	200 g	
Dimensions (W / H / D) in mm	60 / 151 / 31	45 / 80 / 42	60 / 151 / 31	

(1) Loop resistance ≤150 Ω

# Digital Modules ASi, IP67, M12




(2)

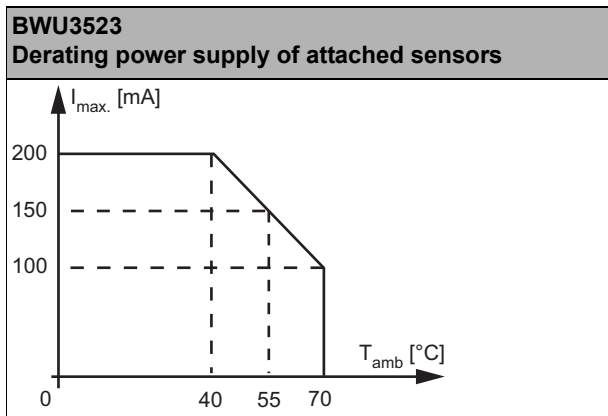


(3) See table "Peripheral fault indication"

(4) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada


(5)

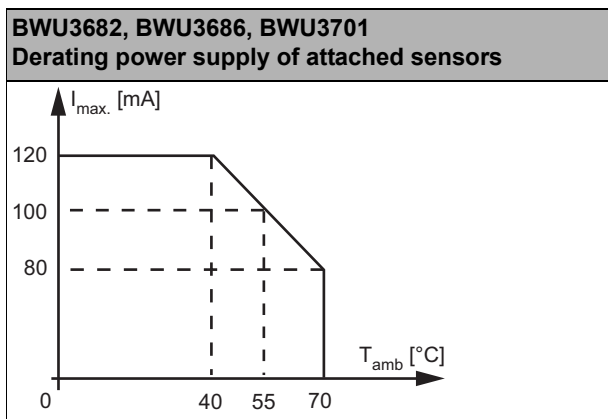

(6)

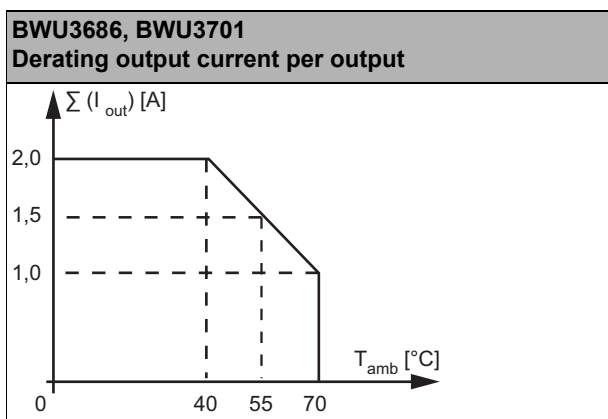

# Digital Modules ASi, IP67, M12

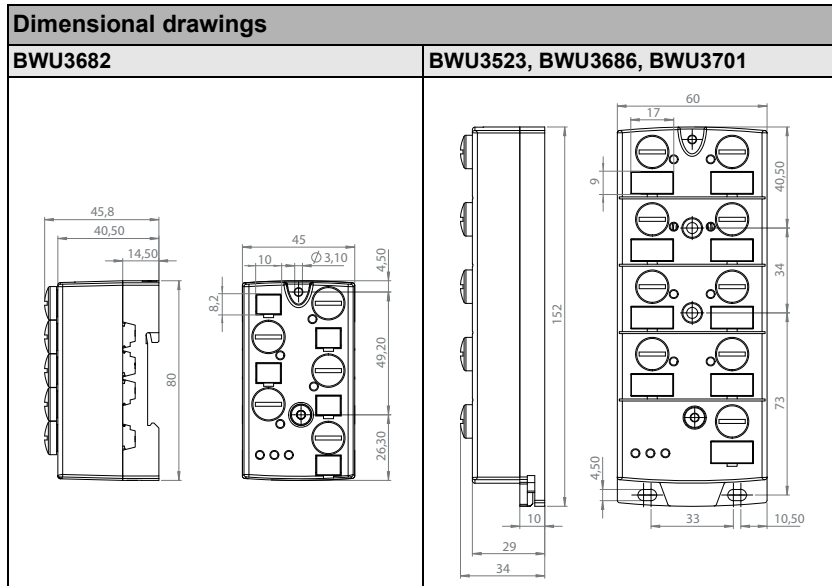

UL-specifications (UL508)	
BWU3523, BWU3682, BWU3686, BWU3701	
External protection	An isolated source with a secondary open circuit voltage of $\leq 30 V_{DC}$ with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.

Article no.	Peripheral fault indication		
	Overload sensor supply	Output short circuited	AUX voltage missing
BWU3523	•	-	-
BWU3682	•	-	-
BWU3686	•	-	-
BWU3701	•	-	-

Programming	ASi bit assignment			
	D3	D2	D1	D0
	input			
BWU3682, BWU3686, BWU3701	I4	I3	I2	I1
BWU3523	slave 1: I4	slave 1: I3	slave 1: I2	slave 1: I1
	slave 2: I8	slave 2: I7	slave 2: I6	slave 2: I5
	output			
BWU3701	-	O3	O2	O1
BWU3686	O4	O3	O2	O1

Programming	Parameter bits			
	P3	P2	P1	P0
BWU3523, BWU3682, BWU3686, BWU3701	not used	0= on / 1= off (synchronous I/O mode)	0= on / 1= off (data input filter 128µs)	0= off / 1= on (peripheral fault)




# Digital Modules ASi, IP67, M12



## Pin assignment

Signal name	Explanation
I <sub>x</sub>	digital input x
O <sub>x</sub>	digital output x
24V <sub>ext out</sub>	power supply, out of external voltage, positive pole (AUX, actuator supply)
0V <sub>ext out</sub>	power supply, out of external voltage, negative pole (AUX, actuator supply)
24V <sub>out of ASi</sub>	power supply, out of ASi, positive pole (sensor supply)
0V <sub>out of ASi</sub>	power supply, out of ASi, negative pole (sensor supply)
ASi +, ASi -	connection to ASi bus
n.c. (not connected)	not connected

Connections							
Article no.	M12 connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5
BWU3682	X1	I1	24 V out of ASi	I1 (1)	0 V out of ASi	I1 (1)	n.c.
	X2	I2	24 V out of ASi	I2 (1)	0 V out of ASi	I2 (1)	n.c.
	X3	I3	24 V out of ASi	I3 (1)	0 V out of ASi	I3 (1)	n.c.
	X4	I4	24 V out of ASi	I4 (1)	0 V out of ASi	I4 (1)	n.c.
	ADDR (dummy plug)	connection for ASi addressing device					
BWU3686	X1	I1	24 V out of ASi	I1 (1)	0 V out of ASi	I1 (1)	n.c.
	X2	I2	24 V out of ASi	I2 (1)	0 V out of ASi	I2 (1)	n.c.
	X3	I3	24 V out of ASi	I3 (1)	0 V out of ASi	I3 (1)	n.c.
	X4	I4	24 V out of ASi	I4 (1)	0 V out of ASi	I4 (1)	n.c.
	X5	O1	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O1	n.c.
	X6	O2	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O2	n.c.
	X7	O3	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O3	n.c.
	X8	O4	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O4	n.c.
ADDR (dummy plug)	connection for ASi addressing device						
BWU3701	X1	I1	24 V out of ASi	I1 (1)	0 V out of ASi	I1 (1)	n.c.
	X2	I2	24 V out of ASi	I2 (1)	0 V out of ASi	I2 (1)	n.c.
	X3	I3	24 V out of ASi	I3 (1)	0 V out of ASi	I3 (1)	n.c.
	X4	I4	24 V out of ASi	I4 (1)	0 V out of ASi	I4 (1)	n.c.
	X5	O1	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O1	n.c.
	X6	O2	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O2	n.c.
	X7	O3	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O3	n.c.
	X8	not used					
ADDR (dummy plug)	connection for ASi addressing device						

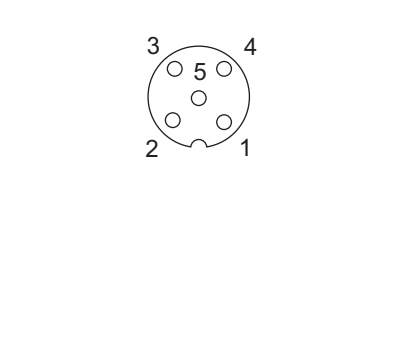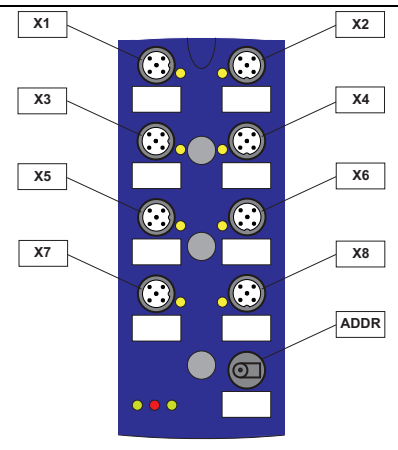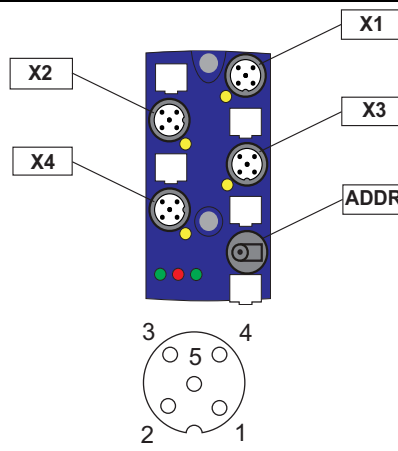


# Digital Modules ASi, IP67, M12




Connections							
Article no.	M12 connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5
BWU3523	X1	I1	24 V out of ASi	I2	0 V out of ASi	I1	n.c.
	X2	I2	24 V out of ASi	n.c.	0 V out of ASi	I2	n.c.
	X3	I3	24 V out of ASi	I4	0 V out of ASi	I3	n.c.
	X4	I4	24 V out of ASi	n.c.	0 V out of ASi	I4	n.c.
	X5	I5	24 V out of ASi	I6	0 V out of ASi	I5	n.c.
	X6	I6	24 V out of ASi	n.c.	0 V out of ASi	I6	n.c.
	X7	I7	24 V out of ASi	I8	0 V out of ASi	I7	n.c.
	X8	I8	24 V out of ASi	n.c.	0 V out of ASi	I8	n.c.
	ADDR (dummy plug)	connection for ASi addressing device					

(1) Pin2 and Pin 4 are bridged internally.

## Mounting according to cable direction



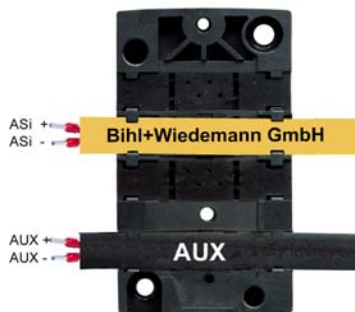


ordinary

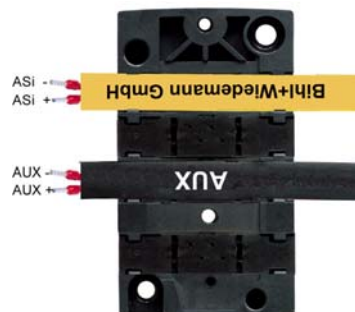

turned

## Line termination with sealing profiles / as junction

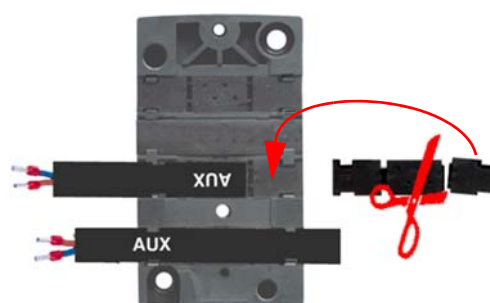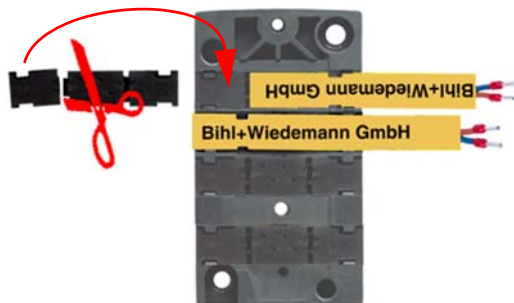

## Digital Modules ASi, IP67, M12



### Accessories:

- ASi substructure module for 4 channel module in 45 mm housing, for DIN rail mounting (art. no. BWU2349)
- ASi substructure module (CNOMO) for 4 channel module in 45 mm housing, for screw mounting (art. no. BWU2350)
- ASi substructure module (CNOMO) for 8 channel module in 60 mm housing, for DIN rail mounting (art. no. BWU3516)
- ASi substructure module (CNOMO) for 8 channel module in 60 mm housing, for screw mounting (art. no. BWU2351)
- Protection caps for unused M12 sockets (art. no. BW2368)
- Sealing profile IP67 (IDC plug), 45 mm (art. no. BW3283)
- Sealing profile IP67 (IDC plug), 60 mm (art. no. BW3282)



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)