

# Current/Voltage Driver

## KFD2-CD-Ex1.32-\*\*


- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Current and voltage input
- Current or voltage output
- Factory configured input/output
- Accuracy 0.1 %
- Up to SIL 2 acc. to IEC/EN 61508



### Function

This isolated barrier is used for intrinsic safety applications. It drives a voltage or current signal from the safe area to I/P converters, electrical valves and positioners located in the hazardous areas. This barrier is designed to provide various inputs and outputs of voltage and current.

### Connection

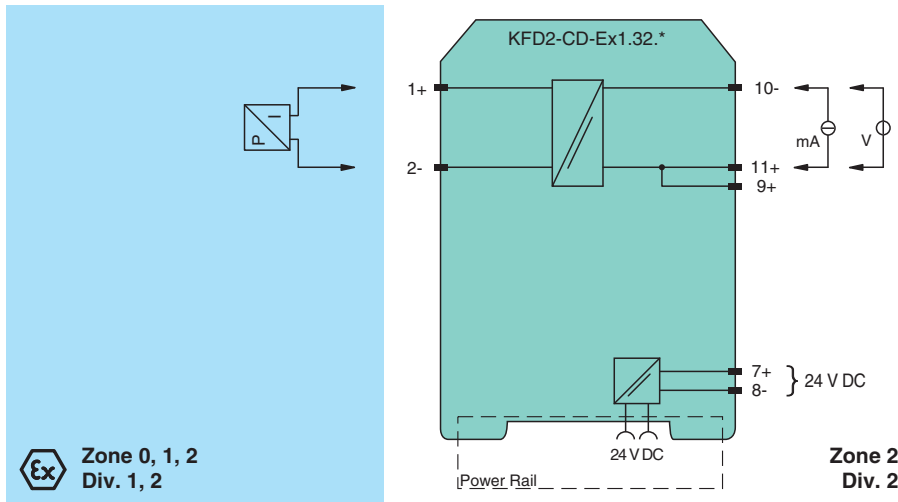

### Technical Data

<b>General specifications</b>	
Signal type	Analog output
<b>Functional safety related parameters</b>	
Safety Integrity Level (SIL)	SIL 2
<b>Supply</b>	
Connection	Power Rail or terminals 7+, 8-
Rated voltage	$U_r$ 20 ... 35 V DC
Ripple	within the supply tolerance
Rated current	$I_r$ current output: $\leq 50$ mA ; voltage output: $\leq 20$ mA
Power dissipation	1.2 W
<b>Input</b>	
Connection side	control side

Release date: 2021-12-16 Date of issue: 2021-12-16 Filename: t184291\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group      USA: +1 330 486 0002      Germany: +49 621 776 2222      Singapore: +65 6779 9091  
 www.pepperl-fuchs.com      pa-info@us.pepperl-fuchs.com      pa-info@de.pepperl-fuchs.com      pa-info@sg.pepperl-fuchs.com



## Technical Data

Connection		terminals 9+, 10-, 11+
Voltage drop		optional current input: approx. 4 V at 20 mA
Input current		≤ 100 µA up to 50 °C (122 °F) at 10 V
Limit		optional current input: Input current: approx. ≤40 mA optional voltage input: input voltage: 12 V DC
Transmission range		optional current input: 0 ... 20 mA/optional voltage input: 0 ... 10 V
<b>Output</b>		
Connection side		field side
Connection		terminals 1+, 2-
Voltage		optional current output: 17 V at 20 mA/optional voltage output: 0 ... 10 V
Current		optional current output: 0 ... 20 mA/optional voltage output: ≤ 20 mA
Load		optional current output: max. 850 Ω optional voltage output: output resistance max. 3 Ω
<b>Transfer characteristics</b>		
Accuracy		0.1 %
Deviation		
After calibration		≤ ± 0.1 % incl. non-linearity and hysteresis at 20 °C (68 °F)
Influence of ambient temperature		≤ ± 0.01 %/K
Rise time		< 10 ms
<b>Galvanic isolation</b>		
Input/power supply		functional insulation, rated insulation voltage 50 V AC
<b>Indicators/settings</b>		
Display elements		LED
Labeling		space for labeling at the front
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
<b>Conformity</b>		
Degree of protection		IEC 60529:2001
Protection against electrical shock		UL 61010-1:2004
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 100 g
Dimensions		20 x 107 x 115 mm (0.8 x 4.2 x 4.5 inch) (W x H x D) , housing type B1
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with hazardous areas</b>		
EU-type examination certificate		BAS 02 ATEX 7203 X
Marking		⊕ II (1)G [Ex ia Ga] IIC , ⊕ II (1)D [Ex ia Da] IIIC , ⊕ I (M1) [Ex ia Ma] I
Voltage	U <sub>o</sub>	25.2 V DC
Current	I <sub>o</sub>	optional current output: 93 mA optional voltage output: 95 mA
Power	P <sub>o</sub>	optional current output: 0.586 W optional voltage output: 0.59 W
<b>Supply</b>		
Maximum safe voltage	U <sub>m</sub>	250 V (Attention! The rated voltage can be lower.)
<b>Input</b>		
Maximum safe voltage	U <sub>m</sub>	250 V (Attention! The rated voltage can be lower.)
<b>Certificate</b>		
Marking		TÜV 99 ATEX 1499 X
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V

Release date: 2021-12-16 Date of issue: 2021-12-16 Filename: t184291\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".


Pepperl+Fuchs Group  
www.pepperl-fuchs.comUSA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com
 PEPPERL+FUCHS

**Technical Data**

Output/power supply	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010
<b>International approvals</b>	
FM approval	
Control drawing	116-0129
UL approval	
Control drawing	116-0173 (cULus)
IECEX approval	
IECEX certificate	IECEX BAS 05.0041
IECEX marking	[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I
<b>General information</b>	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

**Assembly**

Front view

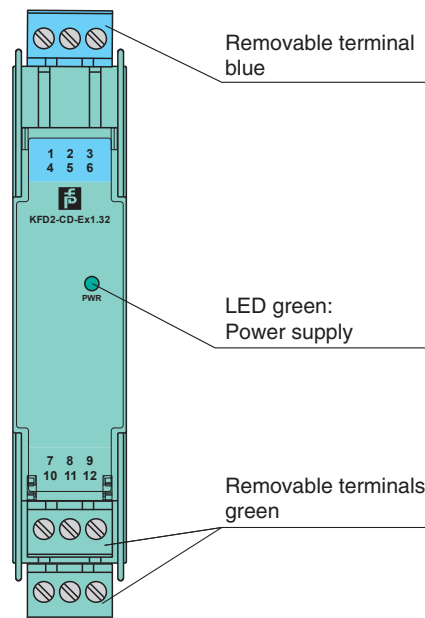



**Matching System Components**

	<b>KFD2-EB2</b>	Power Feed Module
	<b>UPR-03</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	<b>UPR-03-M</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	<b>UPR-03-S</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m




Release date: 2021-12-16 Date of issue: 2021-12-16 Filename: t184291\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

## Matching System Components

	<b>K-DUCT-BU</b>	Profile rail, wiring comb field side, blue
	<b>K-DUCT-BU-UPR-03</b>	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side, blue

## Accessories

	<b>KF-ST-5GN</b>	Terminal block for KF modules, 3-pin screw terminal, green
	<b>KF-ST-5BU</b>	Terminal block for KF modules, 3-pin screw terminal, blue
	<b>KF-CP</b>	Red coding pins, packaging unit: 20 x 6

## Product Versions

### Input/output options, model number

This barrier is designed to provide various inputs and outputs of voltage and current:

- **Current input option**  
A current limit circuit in series to terminal 9 protects the device from damage. The max. voltage drop at the input is DC 4 V, allowing for the connection of several KFD2-CD-Ex1.32 repeaters due to the low voltage drop in order to maintain multiple galvanically isolated outputs (signal duplication).
- **Voltage input option**  
The signal is transmitted to terminals 9 and 10 across an amplifier and the DC/DC converter within the allowable voltage range. A voltage limiter circuit protects the amplifier from incorrect input switching and overvoltage, but will draw current through a 50 mA fuse during operation. The fuse can be changed only by the manufacturer.
- **Current output option**  
The open circuit voltage is DC 24 V within the allowable supply voltage range at terminals 1 and 2. The max. load that can be applied is 850  $\Omega$ .
- **Voltage output option**  
At least 20 mA is available within the allowable supply voltage range at terminals 1 and 2 which means that with 10 V output voltage, a load of at least 500  $\Omega$  must be connected.

Input	Output						Ordering example
	0 mA ... 20 mA	4 mA ... 20 mA	0 V ... 5 V	1 V ... 5 V	0 V ... 10 V	2 V ... 10 V	
0 mA ... 20 mA	0	2	–	9	12	–	Input 0 V ... 10 V, Output 4 mA ... 20 mA: is code number 8 <b>Type code:</b> KFD2-CD-Ex1.32.8
4 mA ... 20 mA	1	(0)	10	–	13	(12)	
0 V ... 5 V	3	5	(15)	–	–	–	
1 V ... 5 V	–	(3)	–	(15)	–	–	
0 V ... 10 V	6	8	21	–	15	–	
2 V ... 10 V	–	(6)	–	–	–	(15)	

For options enclosed in parentheses, the transfer range for a base type is only partially used, i. e. 4 mA ... 20 mA from the base type 0 mA ... 20 mA.



**SCATTERGOOD  
& JOHNSON LTD**  
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

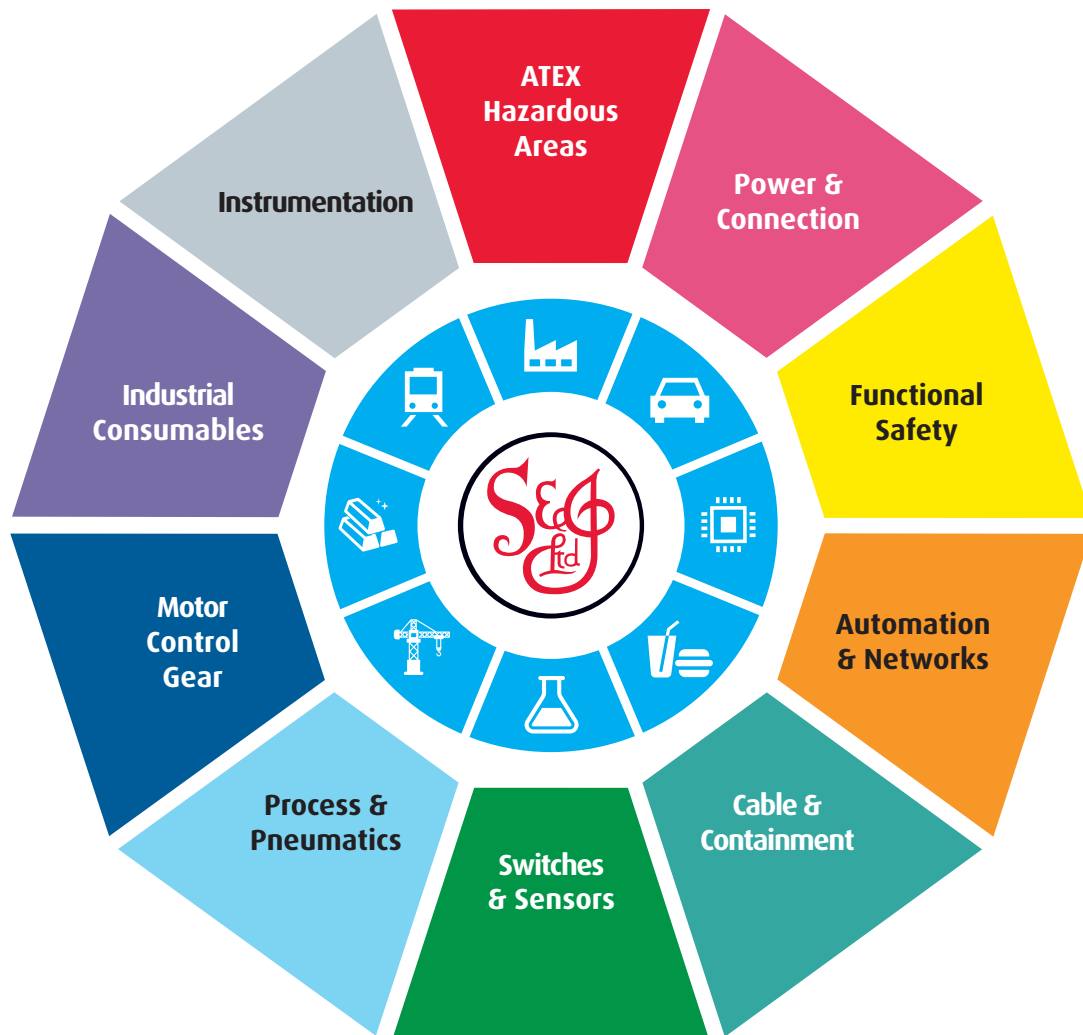

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

**[www.scatts.co.uk](http://www.scatts.co.uk)**