






- * Nickel plated brass body (M8 versions are stainless steel)
- * Ingress Protection IP67 & IP69K
- * Operating temperature -40°C to +70°C
- * Short circuit and reverse polarity protection
- * Supplied complete with 2 body locknuts
- * CE, UL, CSA Approvals

Omron

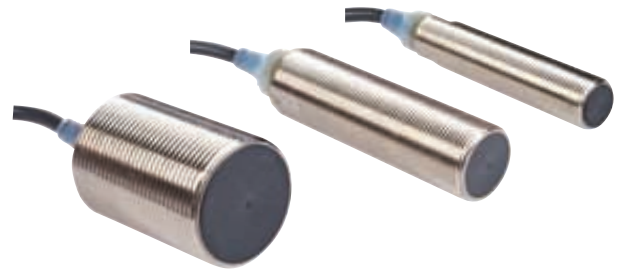

E2A Long Range Inductive Proximity Switches



Short Body - 2m Pre-Cabled Connection

E2A Long Range Inductive Proximity Switches 10 - 30V DC				NPN	
Style	Part Number	Sensing Range (mm)	Installation Mode	Body Size (mm)	
				Thread	Length
 Normally Open (N/O)	E2AS08KS02-WPC1	2	Flush	M8 x 1.0	27
	E2AM12KS04-WPC1	4		M12 x 1.0	34
	E2AM18KS08-WPC1	8		M18 x 1.0	39
	E2AM30KS15-WPC1	15		M30 x 1.5	44
 Normally Open (N/O)	E2AS08KN04-WPC1	4	Non-Flush	M8 x .01	27
	E2AM12KN08-WPC1	8		M12 x1.0	34
	E2AM18KN16-WPC1	16		M18 x 1.0	39
	E2AM30KN20-WPC1	20		M30 x 1.5	44

Long Body - 2m Pre-Cabled Connection

E2A Long Range Inductive Proximity Switches 10 - 30V DC				NPN	
Style	Part Number	Sensing Range (mm)	Installation Mode	Body Size (mm)	
				Thread	Length
 Normally Open (N/O)	E2AS08LS02-WPC1	2	Flush	M8 x 1.0	49
	E2AM12LS04-WPC1	4		M12 x 1.0	56
	E2AM18LS08-WPC1	8		M18 x 1.0	61
	E2AM30LS15-WPC1	15		M30 x 1.5	66
 Normally Open (N/O)	E2AS08LN04-WPC1	4	Non-Flush	M8 x 1.0	49
	E2AM12LN08-WPC1	8		M12 x 1.0	56
	E2AM18LN16-WPC1	16		M18 x 1.0	61
	E2AM30LN30-WPC1	30		M30 x 1.5	66

Leeds

Tel: 0113 243 0203

Sheffield

Tel: 0114 243 1841

Gateshead

Tel: 0191 460 2233

Manchester

Tel: 0161 876 4337

Glasgow

Tel: 0141 892 0166

Walsall

Tel: 01922 403 426

e-mail: sales@scatts.co.uk

web: www.scatts.co.uk