


# IB IL 24 DO 2 (-PAC)

**Inline Terminal  
With Two Digital Outputs**

**AUTOMATIONWORX**

Data Sheet  
6187\_en\_01

© PHOENIX CONTACT - 02/2007

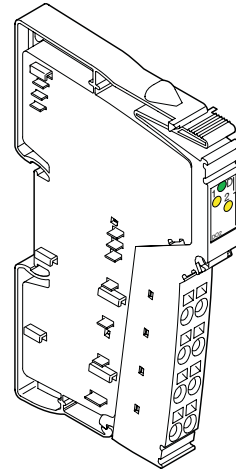

6187A007

## Description

This terminal is used to output digital signals. It is designed for use within an Inline station.

### Features

- Connections for two digital actuators
- Connection of actuators in 2, 3, and 4-wire technology
- Nominal current per output: 500 mA
- Total current of the terminal: 1 A
- Short-circuit and overload protected outputs
- Diagnostic and status indicators



This data sheet is only valid in association with the IB IL SYS PRO UM E user manual or the Inline system manual for your bus system.



Make sure you always use the latest documentation.  
It can be downloaded at [www.download.phoenixcontact.com](http://www.download.phoenixcontact.com).  
A conversion table is available on the Internet at  
[www.download.phoenixcontact.com/general/7000\\_en\\_00.pdf](http://www.download.phoenixcontact.com/general/7000_en_00.pdf).



This data sheet is valid for all products listed on the following page:

## Ordering Data

### Products

Description	Type	Order No.	Pcs./Pck.
Inline terminal with two digital outputs	IB IL 24 DO 2	2740106	1
Inline terminal with two digital outputs; including connector and labeling field	IB IL 24 DO 2-PAC	2861470	1

### Accessories

Description	Type	Order No.	Pcs./Pck.
Connector for digital single-channel, two-channel or 8-channel Inline terminals	IB IL SCN-8	2726337	10
Connector, with color print, for digital single-channel, two-channel or 8-channel Inline terminals	IB IL SCN-8-CP	2727608	10

### Documentation

Description	Type	Order No.	Pcs./Pck.
"Configuring and Installing the INTERBUS Inline Product Range" user manual	IB IL SYS PRO UM E	2743048	1
"Automation Terminals of the Inline Product Range" user manual	IL SYS INST UM E	2698737	1

## Technical Data

### General Data

Housing dimensions (width x height x depth)	12.2 mm x 120 mm x 71.5 mm
Weight	41 g (without connector); 56 g (with connector)
Operating mode	Process data mode with 2 bits
Connection method for actuators	2, 3, and 4-wire technology
Permissible temperature (operation)	-25°C to +55°C
Permissible temperature (storage/transport)	-25°C to +85°C
Permissible humidity (operation/storage/transport)	10% to 95% according to DIN EN 61131-2
Permissible air pressure (operation/storage/transport)	70 kPa to 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20 according to IEC 60529
Protection class	Class 3 according to VDE 0106, IEC 60536
Connection data for Inline connector	
Connection method	Spring-cage terminals
Conductor cross section	0.2 mm <sup>2</sup> to 1.5 mm <sup>2</sup> (solid or stranded), 24 - 16 AWG

### Interface

Local bus	Through data routing
-----------	----------------------



### Power Consumption

Communications power	7.5 V DC
Current consumption at $U_L$	33 mA, maximum
Power consumption at $U_L$	0.25 W, maximum
Segment supply voltage $U_S$	24 V DC (nominal value)
Nominal current consumption at $U_S$	1 A (2 x 0.5 A), maximum

### Supply of the Module Electronics and I/O Through Bus Coupler/Power Terminal

Connection method	Through potential routing
-------------------	---------------------------

**Digital Outputs**

Number	2
Nominal output voltage $U_{OUT}$	24 V DC
Differential voltage for $I_{nom}$	$\leq 1$ V
Nominal current $I_{nom}$ per channel	0.5 A
Tolerance of the nominal current	+10%
Total current	1 A
Protection	Short circuit; overload
Nominal load	
Ohmic	48 $\Omega$ /12 W
Lamp	12 W
Inductive	12 VA (1.2 H, 50 $\Omega$ )
Signal delay upon power up of:	
Nominal ohmic load	200 $\mu$ s, approximately
Nominal lamp load	200 ms, typical (with switching frequencies up to 8 Hz; above this frequency the lamp load responds like an ohmic load)
Nominal inductive load	250 ms (1.2 H, 50 $\Omega$ ), approximately
Signal delay upon power down of:	
Nominal ohmic load	200 $\mu$ s, approximately
Nominal lamp load	200 $\mu$ s, approximately
Nominal inductive load	250 ms (1.2 H, 50 $\Omega$ ), approximately
Switching frequency with:	
Nominal ohmic load	300 Hz, maximum
 This switching frequency is limited by the selected data rate, the number of bus devices, the bus structure, the software and the control or computer system used.	
Nominal lamp load	300 Hz, maximum
 This switching frequency is limited by the selected data rate, the number of bus devices, the bus structure, the software and the control or computer system used.	
Nominal inductive load	0.5 Hz (1.2 H, 50 $\Omega$ ), maximum
Overload response	Auto restart
Response time with ohmic overload (2 $\Omega$ )	3 s, maximum
Restart frequency with ohmic overload (2 $\Omega$ )	133 Hz, approximately
Restart frequency with lamp overload	133 Hz, approximately
Response with inductive overload	Output may be damaged
Reverse voltage protection against short pulses	Protected against reverse voltages
Resistance to permanently applied surge voltages	No
Validity of output data after connecting the 24 V supply voltage (power up)	5 ms, typical
Response upon power down	The output follows the supply voltage without delay
Limitation of the voltage induced on circuit interruption	-24 V, approximately
Single maximum energy in free running	50 mJ
Protective circuit type	Integrated Zener diode in output chip
Overcurrent shutdown	0.7 A, minimum
Output current when switched off	60 $\mu$ A, maximum
Output voltage when switched off	2 V, maximum
Output current with ground connection interrupt	210 $\mu$ A, maximum
Switching power with ground connection interrupt	0.4 mW at 10 k $\Omega$ load resistance, typical
Inrush current	1.5 A for 20 ms maximum, typical

**Output Characteristic Curve When Switched On (Typical)**

Output Current (A)	Differential Output Voltage (V)
0	0
0.2	0.045
0.3	0.066
0.5	0.110
0.7	0.150

**Power Dissipation****Formula to Calculate the Power Dissipation of the Electronics**

$$P_{TOT} = 0.18 \text{ W} + \sum_{i=1}^n (200 \text{ mW} + I_{Li}^2 \times 0.135 \text{ } \Omega)$$

Where:

$P_{TOT}$  Total power dissipation in the terminal  
 Index  
 n Number of set outputs (n = 1 to 2)  
 $I_{Li}$  Load current of output i

**Power Dissipation of the Housing  $P_{HOU}$** 

0.7 W (within the permissible operating temperature)

**Limitation of Simultaneity, Derating**

No limitation of simultaneity, no derating

**Safety Equipment**

Overload/short circuit in the segment circuit

Electronic

Surge voltage

Protective elements of the power terminal

Polarity reversal

Protective elements of the power terminal

**Electrical Isolation/Isolation of the Voltage Areas**

To provide electrical isolation between the logic level and the I/O area it is necessary to supply the station bus coupler and the digital output terminal described here via the bus coupler or a power terminal from separate power supply units. Interconnection of the power supply units in the 24 V area is not permitted.

**Common Potentials**

The 24 V main voltage, 24 V segment voltage, and GND have the same potential. FE is a separate potential area.

**Separate Potentials in the System Consisting of Bus Coupler/Power Terminal and I/O Terminal****- Test Distance**

5 V supply incoming remote bus/7.5 V supply (bus logic)

5 V supply outgoing remote bus/7.5 V supply (bus logic)

7.5 V supply (bus logic)/24 V supply (I/O)

24 V supply (I/O)/functional earth ground

**- Test Voltage**

500 V AC, 50 Hz, 1 min.

500 V AC, 50 Hz, 1 min.

500 V AC, 50 Hz, 1 min.

500 V AC, 50 Hz, 1 min.

**Error Messages to the Higher-Level Control or Computer System**

Short circuit/overload of an output

Yes




An error message is generated when an output is short circuited and switched on. In addition, the diagnostic LED (D) flashes on the terminal at 2 Hz (medium) under these conditions.

Falling below or exceeding the operating voltage

No

**Approvals**For the latest approvals, please visit [www.download.phoenixcontact.com](http://www.download.phoenixcontact.com).

### Local Diagnostic and Status Indicators and Terminal Point Assignment

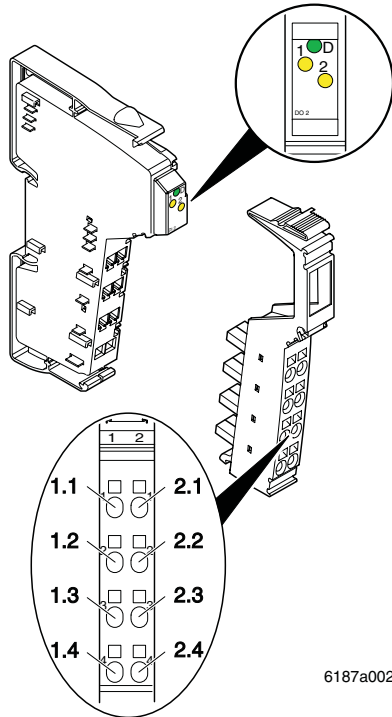

6187a002

Figure 1 Terminal with appropriate connector

### Local Diagnostic and Status Indicators

Des.	Color	Meaning
D	Green	Diagnostics
1, 2	Yellow	Status indicators of the outputs

### Function Identification

Pink

### Terminal Point Assignment

Terminal Points	Assignment
1.1, 2.1	Signal output (OUT)
1.2, 2.2	Segment voltage $U_S$ for 4-wire termination Measuring point for the supply voltage
1.3, 2.3	Ground contact (GND) for 2, 3, and 4-wire termination
1.4, 2.4	FE connection for 3 and 4-wire termination

### Internal Circuit Diagram

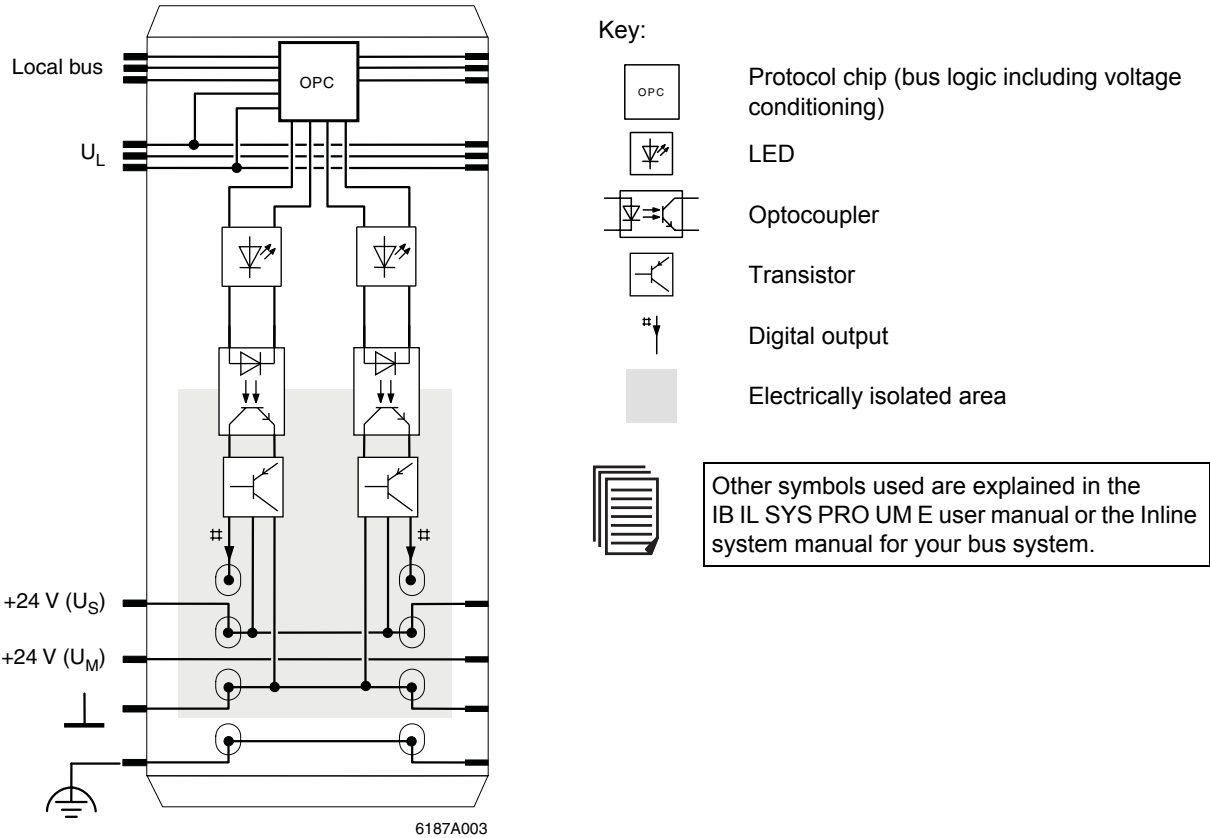


Figure 2 Internal wiring of the terminal points

### Connection Example



When connecting the actuators observe the assignment of the terminal points to the process data (see page 7).

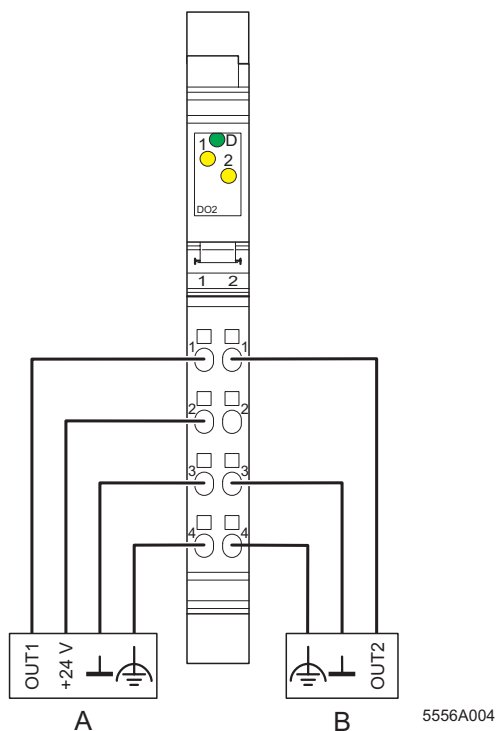


Figure 3 Typical actuator connection

- A 4-wire termination
- B 3-wire termination

### Programming Data

#### Local Bus (INTERBUS)

ID code	BD <sub>hex</sub> (189 <sub>dec</sub> )
Length code	C2 <sub>hex</sub>
Process data channel	2 bits
Input address area	0 bits
Output address area	2 bits
Parameter channel (PCP)	0 bits
Register length (bus)	2 bits

#### Process Data



IN process data is not available.

#### Assignment of Terminal Points to OUT Process Data

"Bit" view	Bit	1	0
Module	Terminal point (signal)	2.1	1.1
	Terminal point (+24 V)	2.2	1.2
	Terminal point (GND)	2.3	1.3
	Terminal point (FE)	2.4	1.4
Status indicator	LED	2	1



The two bits can be at any position within a byte due to automatic addressing.

© PHOENIX CONTACT 02/2007



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)