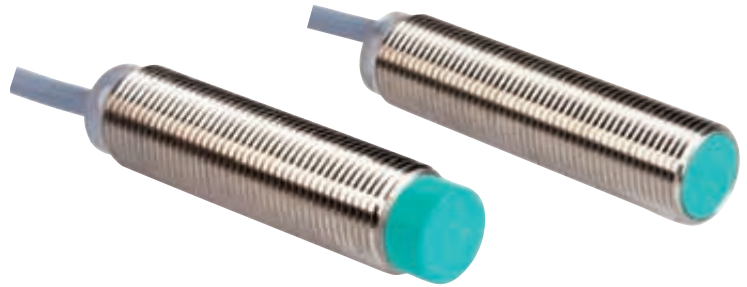





- * NJ Version - High grade stainless steel body
- * NB Version - Nickel plated brass body
- * Ingress Protection IP67
- * Operating temperature -25°C to +70°C
- * LED status indicator
- * Short circuit and reverse polarity protection
- * Supplied complete with 2 body locknuts
- * CE Approval


Pepperl & Fuchs


NB & NJ 2 Wire AC Inductive Proximity Switches




2m Pre-Cabled Connection

NJ Inductive Proximity Switches		20 - 250V AC		2 Wire AC	
Style	Part Number	Sensing Distance (mm)	Installation Mode	Body Size (mm)	
				Thread	Length
 Normally Open (N/O)	NJ1.5-8GM40-WS	1.5	Flush	M8 x 1.0	40
	NJ2-12GM50-WS	2.0		M12 x 1.0	50
	NJ4-12GM50-WS	4.0	Non-Flush	M12 x 1.0	50

NB Inductive Proximity Switches		20 - 250V AC		2 Wire AC	
Style	Part Number	Sensing Distance (mm)	Installation Mode	Body Size (mm)	
				Thread	Length
 Normally Open (N/O)	NBB5-18GM60-WS	5	Flush	M18 x 1.0	60
	NBB10-30GM50-WS	10		M30 x 1.5	50
	NBN8-18GM60-WS	8	Non-Flush	M18 x 1.0	60
	NBB15-30GM50-WS	15	Flush	M30 x 1.5	50

NJ Inductive Proximity Switches		20 - 250V AC		2 Wire AC	
Style	Part Number	Sensing Distance (mm)	Installation Mode	Body Size (mm)	
				Thread	Length
 Normally Closed (N/C)	NJ1.5-8GM40-WO	1.5	Flush	M8 x 1.0	40
	NJ2-12GM50-WO	2.0		M12 x 1.0	50
	NJ4-12GM50-WO	4.0	Non-Flush	M12 x 1.0	50

NB Inductive Proximity Switches		20 - 250V AC		2 Wire AC	
Style	Part Number	Sensing Distance (mm)	Installation Mode	Body Size (mm)	
				Thread	Length
 Normally Closed (N/C)	NBB5-18GM60-WO	5	Flush	M18 x 1.0	60
	NBB10-30GM50-WO	10		M30 x 1.5	50
	NBN8-18GM60-WO	8	Non-Flush	M18 x 1.0	60
	NBB15-30GM50-WO	15	Flush	M30 x 1.5	50

Leeds
Tel: 0113 243 0203

Sheffield
Tel: 0114 243 1841

Gateshead
Tel: 0191 460 2233

Manchester
Tel: 0161 876 4337

Glasgow
Tel: 0141 892 0166

Walsall
Tel: 01922 403 426

e-mail: sales@scatts.co.uk

web: www.scatts.co.uk