

Features

- 1-channel isolated barrier
- 24 V DC supply (loop powered)
- Thermocouple input
- Output 4 mA ... 20 mA
- Internal cold junction compensation
- Sensor breakage detection
- DIP switch selectable ranges


Function

This isolated barrier is used for intrinsic safety applications. It is a loop-powered isolator that converts thermocouple inputs in the hazardous area to a 4 mA ... 20mA signal in the safe area.


The internal cold junction compensation can be bypassed by using terminals 1 and 3.

The output current is linear to input voltage, not proportional to temperature. Zero, span, and burnout detection are field-configurable.

Assembly

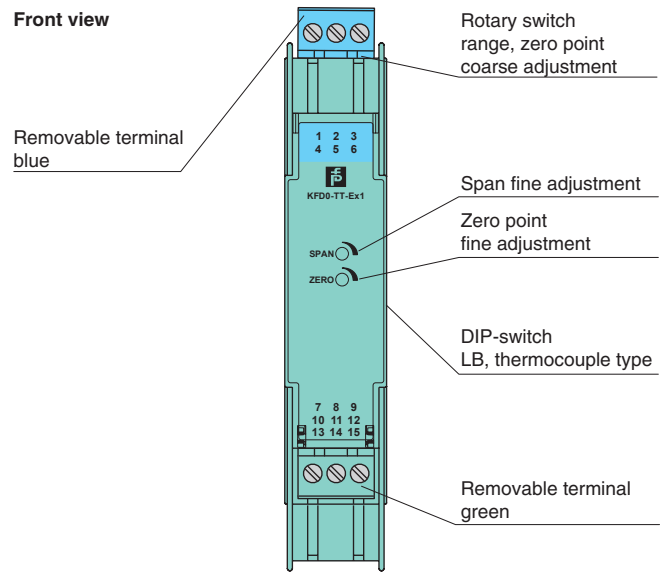

Connection

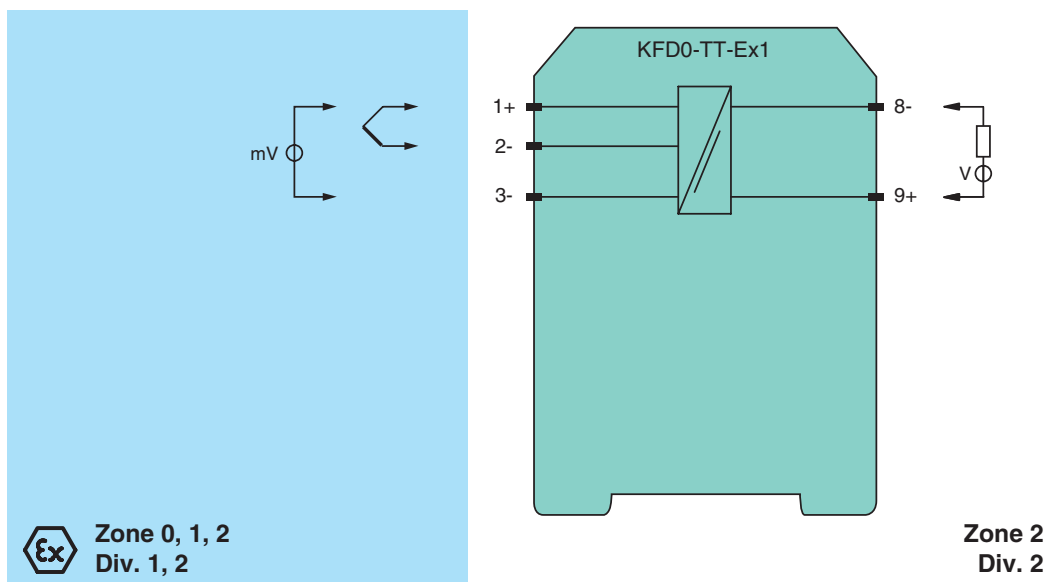

Release date 2019-01-14 10:16 Date of issue 2019-01-14 043692_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

General specifications		
Signal type		Analog input
Supply		
Rated voltage	U_r	12 ... 35 V DC loop powered
Power dissipation		0.4 W
Input		
Connection side		field side
Connection		terminals 1+, 2-, 3- thermocouple E, J, K, N, R, S or T, cold junction referenced to 0 °C (32 °F)
Lead resistance		≤ 100 Ω per line
Current		lead monitoring ON: ≤ 15 nA; OFF: ≤ 1 nA
Output		
Connection side		control side
Connection		terminals 9+, 8-
Load		(U -12 V) / 0.02 A
Current output		4 ... 20 mA , limited to ≤ 35 mA
Fault signal		downscaling ≤ 3 mA , upscaling ≥ 22 mA
Transfer characteristics		
Measurement range	f_n	span 4 ... 100 mV, zero point -12 ... 60 mV , both adjustable
Deviation		
After calibration		0.1 % of full-scale value ± 1 K for the cold junction
Temperature effect		temperature deviation 0.015 % of the span/K or 1.5 μV/K cold junction ± 2 K (calibrated at $T_{amb} = 20 °C (68 °F)$)
Influence of supply voltage		6.5 ppm/V
Characteristic curve		the output voltage is linearly proportionate to the input voltage (not to temperature)
Rise time		250 ms
Galvanic isolation		
Input/Output		safe isolation according to EN 50178, rated insulation voltage 253 V_{eff}
Indicators/settings		
Control elements		DIP-switch rotary switch
Configuration		via DIP switches via rotary switch
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Insulation coordination		EN 50178
Galvanic isolation		EN 50178
Degree of protection		IEC 60529
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 150 g
Dimensions		20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) , housing type B2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-Type Examination Certificate		
Marking		⊕ II (1)GD [EEx ia] IIC
Voltage	U_o	16.1 V
Current	I_o	0.8 mA
Power	P_o	3.2 mW
Type of protection [EEx ia and EEx ib]		
Output		
Maximum safe voltage	U_m	60 V (Attention! The rated voltage can be lower.)
Certificate		
Marking		⊕ TÜV 01 ATEX 1777 X
Galvanic isolation		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010
International approvals		

Release date 2019-01-14 10:16 Date of issue 2019-01-14 043692_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com


Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

CSA approval	
Control drawing	116-0132
General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Configuration

DIP switches function

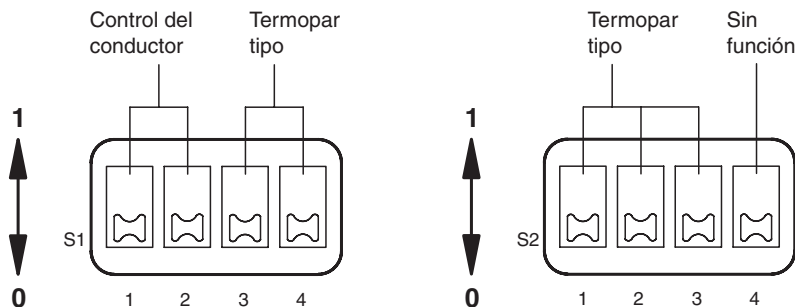


Switch	Position	Function
S1.1/S1.2	1/0	LB UP-upscaled
S1.1/S1.2	0/1	LB DOWN-downscaled
S1.3	1	Thermocouple type E
S1.4	1	Thermocouple type J
S2.1	1	Thermocouple type K, T
S2.2	1	Thermocouple type N
S2.3	1	Thermocouple type R, S

* other combinations not allowed/defined

Note: A new adjustment is necessary in the case of modified configuration (e. g. LB from upscaled to downscaled).

Rotary switches function



Please consider that the values of the Zero-table are only valid for the span range Pos. 0 and that both tables contain typical values, which can be used as an adjustment help.

Switch SPAN coarse adjustment	Span (mV)	Switch ZERO coarse adjustment	Zero point (mV) for max. span (potentiometer right-hand stop)	Zero point (mV) for min. span (potentiometer left-hand stop)
0	100.0 ... 53.0	0	-12.0 ... -8.0	-13.6 ... -8.5
1	55.0 ... 30.0	1	-8.3 ... -3.7	-9.0 ... -4.0
2	32.0 ... 20.0	2	-4.0 ... 1.0	-4.3 ... 1.1
3	22.0 ... 5.0	3	0.5 ... 5.6	0.5 ... 6.1
4	17.0 ... 12.0	4	4.6 ... 10.2	5.2 ... 11.2
5	14.0 ... 11.0	5	9.3 ... 14.9	10.2 ... 16.2
6	13.0 ... 9.0	6	13.9 ... 19.5	15.2 ... 21.1
7	11.0 ... 8.0	7	18.3 ... 23.9	20.1 ... 25.6
8	10.0 ... 7.0	8	23.0 ... 28.6	24.7 ... 31.0
9	9.0 ... 6.0	9	27.6 ... 33.1	30.0 ... 36.0
A	8.0 ... 5.5	A	32.1 ... 37.6	35.0 ... 40.5
B	7.5 ... 5.0	B	36.6 ... 42.1	39.4 ... 46.0
C	7.0 ... 4.5	C	41.1 ... 46.6	45.1 ... 51.0
D	6.5 ... 4.2	D	45.5 ... 51.0	50.1 ... 56.0
E	6.2 ... 4.1	E	50.0 ... 55.5	55.0 ... 61.0
F	6.1 ... 4.0	F	54.4 ... 60.0	60.0 ... 62.0

Recommendation for adjustment:

1. Span determination (in mV).
2. "Span coarse adjustment" in accordance with the table.
3. Minimum value adjustment (in mV or °C) at the input.
4. "Zero point coarse adjustment", to approach to 4 mA.
5. "Zero point fine adjustment" to exactly 4 mA.
6. Maximum value adjustment (in mV or °C) at the input.
7. "Span fine adjustment" to exactly 20 mA.
8. If necessary repeat fine adjustment for 4 mA and 20 mA.

Release date 2019-01-14 10:16 Date of issue 2019-01-14 043692_eng.xml



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk