

**Features**

- 1-channel isolated barrier
- Universal usage at different power supplies
- Input 2-wire and 3-wire transmitters and 2-wire current sources
- Output 0/4 mA ... 20 mA
- 2 relay contact outputs
- Adjustable energized/de-energized delay
- Programmable high/low alarm
- Linearization function (max 20 points)
- Line fault detection (LFD)
- Up to SIL 2 acc. to IEC 61508/IEC 61511

**Function**

This isolated barrier is used for intrinsic safety applications. The device supplies 2-wire and 3-wire transmitters, and can also be used with current sources.

Two relays and an active 0/4 mA ... 20 mA current source are available as outputs. The relay contacts and the current output can be integrated in security-relevant circuits. The current output is easily scaled.

On the display the measured value can be indicated in various physical units.


The device is easily configured by the use of keypad or with the PACTware configuration software.

The input has a line fault detection.

A fault is signaled by LEDs acc. to NAMUR NE44.


For additional information, refer to the manual and [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

**Assembly**

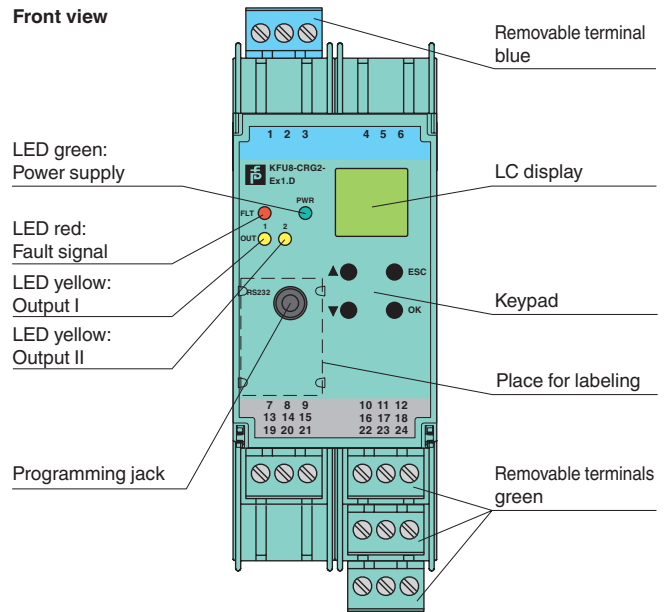


**SIL 2**

**Connection**

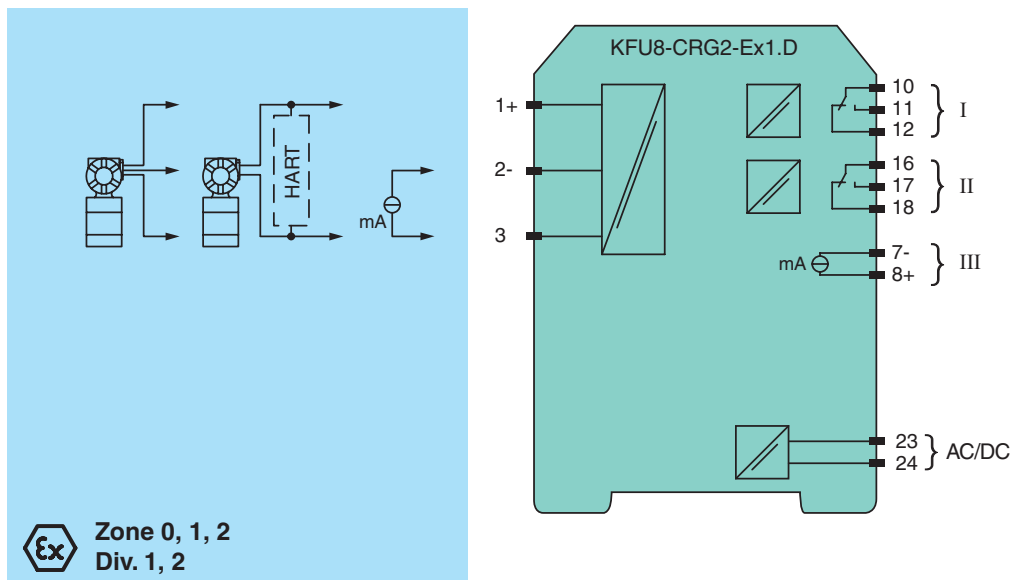

Release date 2018-08-15 10:04 Date of issue 2018-08-15 255622\_eng.xml



<b>General specifications</b>	
Signal type	Analog input
<b>Functional safety related parameters</b>	
Safety Integrity Level (SIL)	SIL 2
<b>Supply</b>	
Connection	terminals 23, 24
Rated voltage $U_r$	20 ... 90 V DC or 48 ... 253 V AC
Power dissipation	2 W / 3 VA
Power consumption	2.2 W / 4 VA
<b>Interface</b>	
Programming interface	programming socket
<b>Input</b>	
Connection side	field side
Connection	terminals 1, 2, 3
<b>Input I</b>	
Input signal	0/4 ... 20 mA
Available voltage	> 15 V at 20 mA
Open circuit voltage/short-circuit current	24 V / 33 mA
Input resistance	45 $\Omega$ (terminals 2, 3)
Line fault detection	breakage I < 0.2 mA; short-circuit I > 22 mA
<b>Output</b>	
Connection side	control side
Connection	output I: terminals 10, 11, 12 output II: terminals 16, 17, 18 output III: terminals 8+, 7-
Output signal	0 ... 20 mA or 4 ... 20 mA
<b>Output I, II</b>	
Contact loading	250 V AC / 2 A / $\cos \phi \geq 0.7$ ; 40 DC / 2 A
Mechanical life	$5 \times 10^7$ switching cycles
<b>Output III</b>	
Signal	Signal, analog
Current range	0 ... 20 mA or 4 ... 20 mA
Open loop voltage	$\leq 24$ V DC
Load	$\leq 650 \Omega$
Fault signal	downscale I $\leq 3.6$ mA, upscale I $\geq 21.5$ mA (acc. NAMUR NE43)
Energized/De-energized delay	0 ... 250 s , adjustable
<b>Transfer characteristics</b>	
<b>Input I</b>	
Accuracy	< 30 $\mu$ A
Influence of ambient temperature	0.003 %/K (30 ppm)
<b>Output I, II</b>	
Response delay	$\leq 200$ ms at bounce from 0 ... 20 mA
<b>Output III</b>	
Resolution	$\leq 10 \mu$ A
Accuracy	< 20 $\mu$ A
Influence of ambient temperature	0.005 %/K (50 ppm)
Reaction time	< 650 ms at bounce from 0 ... 20 mA at the input, 90 % of output full-scale value
<b>Galvanic isolation</b>	
Input/Other circuits	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Output I, II/other circuits	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Mutual output I, II, III	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Output III/power supply	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Interface/power supply	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
<b>Indicators/settings</b>	
Display elements	LEDs , display
Control elements	Control panel
Configuration	via operating buttons via PACTware
Labeling	space for labeling at the front
<b>Directive conformity</b>	
<b>Electromagnetic compatibility</b>	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
<b>Low voltage</b>	
Directive 2014/35/EU	EN 61010-1:2010
<b>Conformity</b>	


Release date 2018-08-15 10:04 Date of issue 2018-08-15 255622\_eng.xml

Electromagnetic compatibility		NE 21:2006
Degree of protection		IEC 60529:2001
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>		
Degree of protection		IP20
Connection		screw terminals
Mass		300 g
Dimensions		40 x 119 x 115 mm (1.6 x 4.7 x 4.5 inch) , housing type C3
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with hazardous areas</b>		
EU-Type Examination Certificate		TÜV 01 ATEX 1701
Marking		$\text{Ex}$ II (1)G [Ex ia Ga] IIC $\text{Ex}$ II (1)D [Ex ia Da] IIIC $\text{Ex}$ I (M1) [Ex ia Ma] I
Input		Ex ia
Supply		
Maximum safe voltage	$U_m$	253 V AC (Attention! The rated voltage can be lower.)
Equipment		terminals 1+, 3-
Voltage	$U_o$	25.8 V
Current	$I_o$	93 mA
Power	$P_o$	0.603 W
Equipment		terminals 2-, 3
Voltage	$U_i$	< 30 V
Current	$I_i$	115 mA
Voltage	$U_o$	5 V
Current	$I_o$	0.3 mA
Power	$P_o$	0.3 mW
Equipment		terminals 1+, 2 / 3-
Voltage	$U_o$	25.8 V
Current	$I_o$	112 mA
Power	$P_o$	720 mW
Output I, II		terminals 10, 11, 12; 16, 17, 18 non-intrinsically safe
Maximum safe voltage	$U_m$	253 V AC / 40 V DC (Attention! $U_m$ is no rated voltage.)
Contact loading		253 V AC/2 A/cos $\phi$ > 0.7; 40 V DC/2 A resistive load (TÜV 01 ATEX 1701)
Output III		terminals 8+, 7- non-intrinsically safe
Maximum safe voltage	$U_m$ $U_m$	40 V (Attention! The rated voltage can be lower.)
Interface		RS 232
Maximum safe voltage	$U_m$	40 V (Attention! The rated voltage can be lower.) , RS 232
Galvanic isolation		
Input/Other circuits		safe galvanic isolation acc. to EN 50020, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013 , EN 60079-11:2012
<b>International approvals</b>		
FM approval		
Control drawing		16-554FM-12 (cFMus)
IECEX approval		IECEX TUN 09.0007
Approved for		[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I
<b>General information</b>		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .
<b>Accessories</b>		
Optional accessories		<ul style="list-style-type: none"> <li>- FDT framework PACTware 4.1</li> <li>- device type manager DTM Interface Technology</li> <li>- adapter K-ADP-USB</li> </ul>

Release date 2018-08-15 10:04 Date of issue 2018-08-15 255622\_eng.xml



**Maximum Switching Power of Output Contacts**

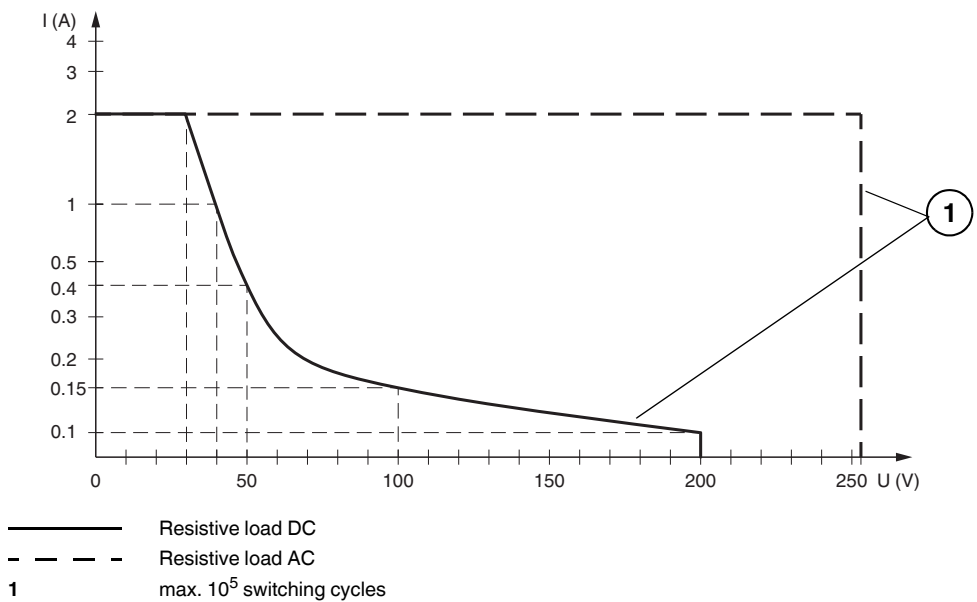

Release date 2018-08-15 10:04 Date of issue 2018-08-15 255622\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)