

## Contact insert - HC-A04-I-UT-M - 1585236

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Contact insert, number of positions: 4+PE, size: D7, number of connections per position: 1, Pin, Screw connection, 230 V/400 V, 24 A, 0.5 mm<sup>2</sup> ... 2.5 mm<sup>2</sup>

### Product Description

Contact insert  
without wire protection, with IP65 sealing screw


**RoHS**
COMPLETE RoHS

### Key Commercial Data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 1 pc  |
| GTIN                                 | <br>4 046356 284967 |
| GTIN                                 | 4046356284967   |
| Weight per Piece (excluding packing) | 14.300 g  |
| Custom tariff number                 | 85366990  |
| Country of origin                    | China   |

### Technical data

#### General

|                                    |  |
|------------------------------------|--|
| Note                               | for housing HC-D7  |
|                                    | Connectors may be operated only when there is no load/voltage. |
| Connection method                  | Screw connection   |
| Tightening torque                  | 0.25 Nm ... 0.5 Nm   |
| Screwdriver blade                  | 0.4 x 2.5 mm   |
| Number of connections per position | 1  |
| Degree of pollution                | 3  |
| Overvoltage category               | III  |
| Number of positions                | 4+PE   |
| Insertion/withdrawal cycles        | ≥ 500  |
| Size                               | D7   |
| Contact numbering                  | 1 - 4  |

## Contact insert - HC-A04-I-UT-M - 1585236

### Technical data

#### General

|   |   |
|---|---|
| Conductor cross section                 | 0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>   |
| Connection cross section AWG            | 20 ... 14   |
| Stripping length of the individual wire | 5 mm  |
| Assembly instructions                   | To ensure correct use, installation in housing with IP54 protection or better is required |
| Connection                              | Already includes one IP65 sealing screw   |

#### Ambient conditions

|                                 |  |
|---------------------------------|--|
| Ambient temperature (operation) | -40 °C ... 125 °C (including heating up of contacts) |
|---------------------------------|--|

#### Material data

|                          |   |
|--------------------------|---|
| Seal material            | NBR, conductive   |
| Contact material         | Copper alloy  |
| Contact surface material | Ag  |
| Contact carrier material | PC  |
| Standards/regulations    | PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3) |

#### Electrical characteristics

|                                  |                             |
|----------------------------------|-----------------------------|
| Rated voltage for power contacts | 230/400 V                   |
| Rated voltage (III/3)            | 230 V (Conductor-PE)        |
|                                  | 400 V (Conductor-Conductor) |
| Rated surge voltage              | 4 kV                        |
|                                  | 4 kV                        |
| Rated current                    | 24 A                        |

#### Standards and Regulations

|  |                            |
|--|----------------------------|
| Constructional and testing regulations | IEC 61984:2008             |
|  | IEC 60664-1:2007           |
|  | IEC 60664-1, DIN IEC 60512 |
| Flammability rating according to UL 94 | V0                         |


#### Environmental Product Compliance

|            |   |
|------------|---|
|            | Lead 7439-92-1  |
| China RoHS | Environmentally Friendly Use Period = 50  |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

### Drawings


# Contact insert - HC-A04-I-UT-M - 1585236

Diagram

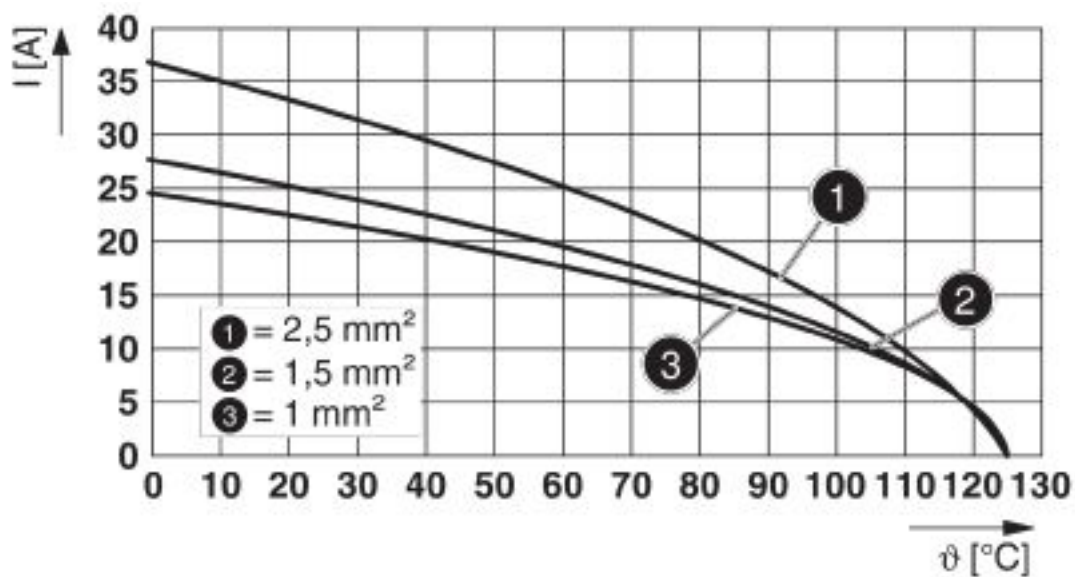

Derating diagram


Dimensional drawing

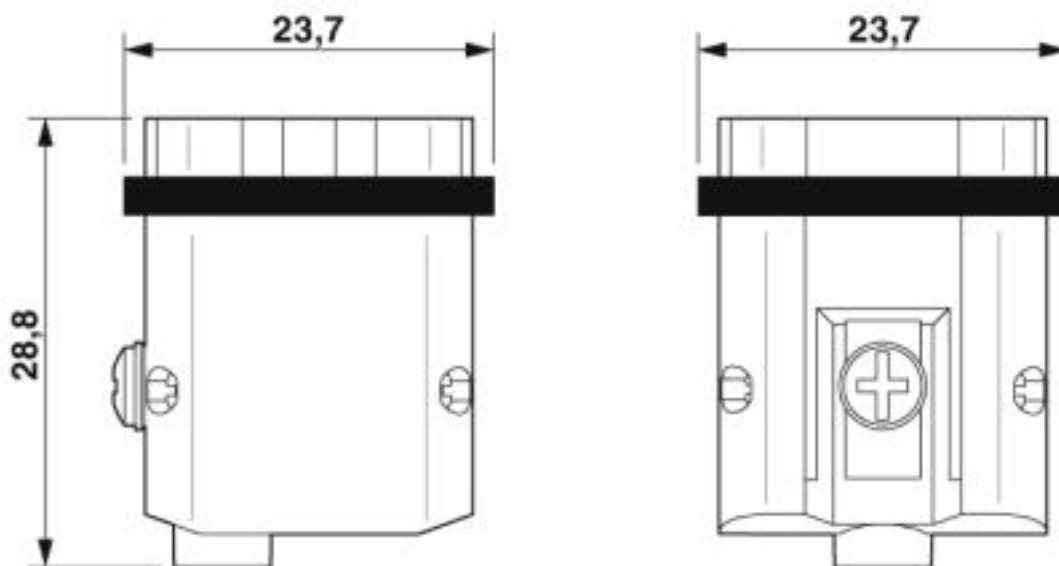

Male insert

## Contact insert - HC-A04-I-UT-M - 1585236

Schematic diagram

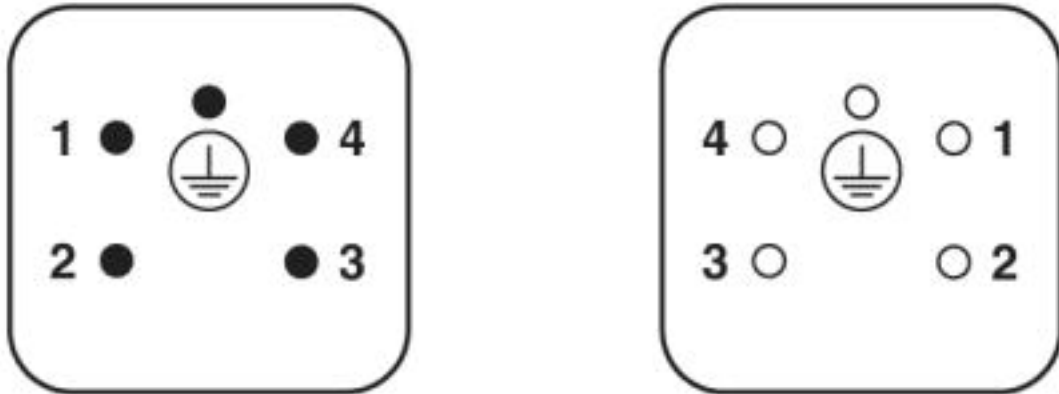

Connector pin assignment connection side: Left pin; right socket

### Classifications

eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27140800 |
| eCl@ss 4.1 | 27140800 |
| eCl@ss 5.0 | 27143400 |
| eCl@ss 5.1 | 27261200 |
| eCl@ss 6.0 | 27261200 |
| eCl@ss 7.0 | 27440205 |
| eCl@ss 8.0 | 27440205 |
| eCl@ss 9.0 | 27440205 |

ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC000438 |
| ETIM 5.0 | EC000438 |
| ETIM 6.0 | EC000438 |
| ETIM 7.0 | EC000438 |

UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211923 |
| UNSPSC 7.0901 | 39121522 |
| UNSPSC 11     | 39121522 |
| UNSPSC 12.01  | 39121522 |
| UNSPSC 13.2   | 39121522 |

### Approvals

Approvals

<https://www.phoenixcontact.com/gb/products/1585236>



## Contact insert - HC-A04-I-UT-M - 1585236


### Approvals


Approvals

CSA / UL Recognized / EAC / DNV GL

Ex Approvals

### Approval details

|                            |   |   |       |
|----------------------------|---|---|-------|
| CSA                        |  | <a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a> | 13631 |
| Nominal voltage UN         |   | 600 V   |       |
| Nominal current IN         |   | 18 A  |       |
| mm <sup>2</sup> /AWG/kcmil |   | 14  |       |

|                            |   |   |         |
|----------------------------|---|---|---------|
| UL Recognized              |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E118976 |
| Nominal voltage UN         |   | 600 V   |         |
| Nominal current IN         |   | 24 A  |         |
| mm <sup>2</sup> /AWG/kcmil |   | 14  |         |

|     |   |  |                          |
|-----|---|--|--------------------------|
| EAC |  |  | RU C-<br>DE.AI30.B.01102 |
|-----|---|--|--------------------------|

|        |   |   |            |
|--------|---|---|------------|
| DNV GL |  | <a href="https://approvalfinder.dnvgl.com/">https://approvalfinder.dnvgl.com/</a> | TAE000037S |
|--------|---|---|------------|

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)