

# Digital Modules ASi, IP67, M12



2 x 2 connectors for profile cable

2 color LEDs per output, state (yellow), overload (red) (optional)



(Figure similar)



Figure	Type	Inputs digital	Outputs digital	M12 connection (1)	Input voltage (sensor supply) (2)	Output voltage (actuator supply) (3)	ASi connection (4)	ASi address (5)	Max. output current	Art. no.
	IP67, 4 x M12	2	2 x electronic	Y	out of ASi	out of AUX	ASi profile cable	1 AB slave	1 A per output	<b>BWU3456</b>
	IP67, 4 x M12	2	2 x electronic, special ASi bit assignment	Y	out of ASi	out of AUX	ASi profile cable	1 AB slave	1 A per output	<b>BWU3539</b>
	IP67, 4 x M12	2	2 x electronic, special ASi bit assignment	Y	out of ASi	out of AUX	ASi profile cable	1 single slave	1 A per output	<b>BWU3775</b>
	IP67, 4 x M12	2	2 x electronic	single	out of ASi	out of AUX	ASi profile cable	1 AB slave	1 A per output	<b>BWU3141</b>
	IP67, 4 x M12	2	2 x electronic	single	out of ASi	out of AUX	ASi via M12	1 AB slave	1 A per output	<b>BWU3517</b>
	IP67, 4 x M12	4	–	Y	out of ASi	–	ASi profile cable	1 AB slave	–	<b>BWU2552</b>
	IP67, 4 x M12	4	–	Y	out of ASi	–	ASi via M12	1 AB slave	–	<b>BWU3077</b>
	IP67, 4 x M12	4	–	single	out of ASi	–	ASi profile cable	1 AB slave	–	<b>BWU2620</b>
	IP67, 4 x M12	4	–	single	out of ASi	–	ASi profile cable	1 AB slave S-0.A.7.0	–	<b>BWU3556</b>
	IP67, 4 x M12	4	–	single	out of ASi	–	ASi via M12	1 AB slave	–	<b>BWU3457</b>
	IP67, 4 x M12	4	–	single	out of AUX	–	ASi profile cable	1 AB slave	–	<b>BWU2725</b>
	IP67, 4 x M12	4	2 x electronic	mixed	out of AUX	out of AUX	ASi profile cable	1 AB slave	1 A per output	<b>BWU2767</b>
	IP67, 4 x M12	4	4 x electronic	mixed	out of ASi	out of ASi	ASi profile cable	1 AB slave	120 mA per output	<b>BWU3240</b>
	IP67, 4 x M12	4	4 x electronic	mixed	out of AUX	out of AUX	ASi profile cable	1 AB slave	500 mA per output	<b>BWU2547</b>
	IP67, 4 x M12	4	4 x electronic	mixed (inputs/outputs swapped)	out of AUX	out of AUX	ASi profile cable	1 AB slave	500 mA per output	<b>BWU3887</b>
	IP67, 4 x M12	4	4 x electronic	Y	out of ASi	out of AUX	ASi profile cable	1 AB slave	500 mA per output	<b>BWU2487</b>
	IP67, 4 x M12	4	4 x electronic	Y	out of AUX	out of AUX	ASi profile cable	1 AB slave	500 mA per output	<b>BWU3032</b>
	IP67, 4 x M12	4	3 x electronic	Y	out of ASi	out of AUX	ASi profile cable	1 AB slave	500 mA per output	<b>BWU3375</b>
	IP67, 4 x M12	–	4 x electronic	Y	–	out of AUX	ASi profile cable	1 single slave	1 A per output	<b>BWU2713</b>
	IP67, 4 x M12	–	4 x electronic	Y	–	out of AUX	ASi profile cable	1 AB slave	1 A per output	<b>BWU2594</b>
IP67, 4 x M12	–	4 x electronic	Y	–	out of AUX, 2A per output	ASi profile cable	1 AB slave	2 A per output	<b>BWU2728</b>	


# Digital Modules ASi, IP67, M12



Figure	Type	Inputs digital	Outputs digital	M12 connection (1)	Input voltage (sensor supply) (2)	Output voltage (actuator supply) (3)	ASi connection (4)	ASi address (5)	Max. output current	Art. no.
	IP67, 8 x M12	4	4 x electronic	Y	out of ASi	out of AUX	ASi profile cable	1 AB slave	1 A per output	BWU2626
	IP67, 8 x M12	4	4 x electronic	Y	out of ASi	out of AUX	ASi profile cable	1 AB slave	2 A per output	BWU3426
	IP67, 8 x M12	4	4 x electronic	single	out of ASi	out of AUX	ASi profile cable	1 AB slave	1 A per output	BWU2617
	IP67, 8 x M12	4	4 x electronic	single	out of ASi	out of AUX	ASi profile cable	1 single slave	1 A per output	BWU2684
	IP67, 8 x M12	4	4 x electronic	single	out of AUX	out of AUX	ASi profile cable	1 AB slave	1 A per output	BWU2810
	IP67, 8 x M12	4	4 x electronic	Y	out of AUX	out of AUX	ASi profile cable	1 AB slave	1 A per output	BWU3510
	IP67, 8 x M12	4	4 x electronic	single	out of AUX	out of AUX	ASi using M12	1 AB slave	1 A per output	BWU2645
	IP67, 8 x M12	4	4 x electronic	single	out of ASi	out of AUX, 2A per output	ASi profile cable	1 single slave	2 A per output	BWU3540
	IP67, 8 x M12	4	3 x electronic	single	out of ASi	out of AUX, 2A per output	ASi profile cable	1 AB slave	2 A per output	BWU3496
	IP67, 8 x M12	8	–	Y	out of AUX	–	ASi profile cable	2 AB slaves	–	BWU2770
	IP67, 8 x M12	8	–	Y	out of ASi	–	ASi profile cable	2 AB slaves	–	BWU2651
	IP67, 8 x M12	8	–	single	out of ASi	–	ASi profile cable	2 AB slaves	–	BWU2983
	IP67, 8 x M12	8	8 x electronic	Y	out of ASi	out of AUX	ASi profile cable	2 AB slaves	1 A per output	BWU2619
	IP67, 8 x M12	8	8 x electronic	Y	out of AUX	out of AUX	ASi profile cable	2 AB slaves	1 A per output	BWU3892
	IP67, 8 x M12	–	8 x electronic	Y	–	out of AUX	ASi profile cable	2 AB slaves	1 A per output	BWU2652

Replacement, ASi Version 2: single slaves (digital) are also working with the first generation ASi masters.

(1) **M12 wiring:** either as a single-wiring, Y-wiring or mixed-wiring.

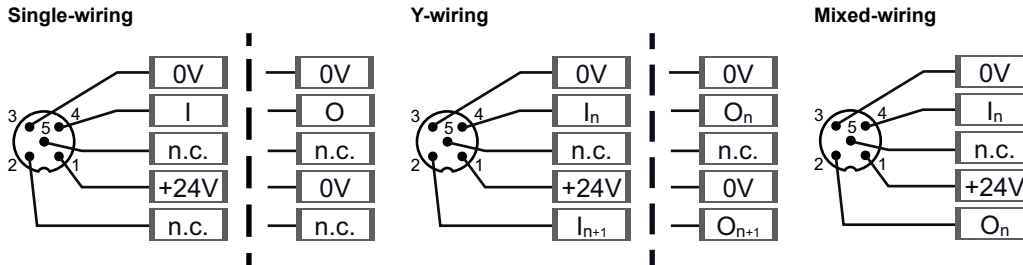

- (2) **Input voltage (sensor supply):** inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.
- (3) **Output voltage (actuator supply):** outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential
- (4) **ASi connection:** the connection to ASi as well to AUX (auxiliary 24 V power) is made via yellow resp. black ASi profile cable with piercing technology or via M12 socket (in IP20 via clamps).
- (5) **ASi address:** 1 AB Slave (max. 62 AB Slaves/ASi network), 2 AB Slaves (max. 31 modules with 2 AB Slaves), Single Slaves (max. 31 Single Slaves/ASi network), mixed use allowed.  
For modules with two slaves the second slave is turned off as long as the first slave is addressed to address "0".  
Upon request, slaves are available with specific ASi Slave profiles.

# Digital Modules ASi, IP67, M12



Article No.	BWU3077	BWU2552	BWU2620	BWU3556	BWU3457	BWU2725	
<b>General data</b>							
Device type	input						
<b>Connection</b>							
ASi/AUX connection	M12 <sup>(1)</sup>	profile cable and piercing			M12 <sup>(1)</sup>	profile cable and piercing	
Periphery connection	M12, Y-wiring		M12, single-wiring				
Length of connector cable	unlimited <sup>(2)</sup>						
<b>ASi</b>							
Profile	S-0.A.E (ID1=7 default)		S-0.A.0 (ID1=7 default)	S-0.A.E (ID1=7 default)	S-0.A.E (ID1=7 default)		
Address	1 AB slave						
Required Master profile	≥M3						
As of ASi specification	2.1						
Operating voltage	30 V (18 ... 31.6 V)						
Max. current consumption	165 mA				45 mA		
Max. current consumption without sensor/ actuator supply	45 mA						
<b>AUX</b>							
Operating voltage	-				24 V (18 ... 30 V)		
Max. current consumption	-				1 A		
<b>Input</b>							
Number	4						
Power supply	out of ASi				out of AUX		
Sensor supply	short-circuit and overload protected according to EN 61131-2						
Power supply of attached sensors	up to +40 °C	120 mA <sup>(3)</sup>				max. 1 A	
	at +55 °C	100 mA <sup>(3)</sup>					
	at +70 °C	80 mA <sup>(3)</sup>					
Switching threshold	U < 5 V (low) U > 15 V (high)						
<b>Display</b>							
LED ASi (green)	on: ASi voltage on flashing: ASi voltage on, but peripheral fault <sup>(4)</sup> or address 0 off: no ASi voltage						
LED FLT/FAULT (red)	on: slave address 0 or slave offline flashing: peripheral fault <sup>(4)</sup> off: slave online						
LED AUX (green)	-				on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX		
LEDs I1 ... In (yellow)	state of inputs I1 ... I4						

# Digital Modules ASi, IP67, M12




Article No.	BWU3077	BWU2552	BWU2620	BWU3556	BWU3457	BWU2725
<b>Environment</b>						
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529					
Operating altitude	max. 2000 m					
Ambient temperature	-30 °C ... +55 °C (up to max. +70 °C) <sup>(3)</sup> <sup>(5)</sup>					
Storage temperature	-25 °C ... +85 °C					
Housing	plastic, for screw mounting	plastic, for DIN rail mounting			plastic, for screw mounting	plastic, for DIN rail mounting
Pollution degree	2					
Protection category	IP67 <sup>(6)</sup>					
Tolerable loading referring to humidity	according to EN 61131-2					
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2					
Max. tolerable vibration stress	5 ... 8 Hz 50 mm <sub>pp</sub> /8 ... 500 Hz 6g, acc. EN 61131-2					
Insulation voltage	≥500 V					
Weight	100 g					
Dimensions (W / H / D) in mm	45 / 116,5 / 47,5	45 / 80 / 42			45 / 116,5 / 47,5	45 / 80 / 42


(1) **Line protection:**

If the module is supplied via a M12 connection with A or B coding, it may only be used with a current load of max. 4 A per pin in acc. with IEC 61076-2-101 and IEC 61076-2-109. A fused tap is recommended. There is no such limitation for modules supplied via piercing contacts.


**Connection to ASi and AUX via M12**

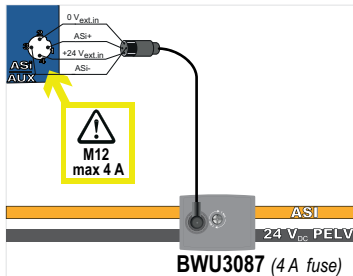

**via piercing contacts**

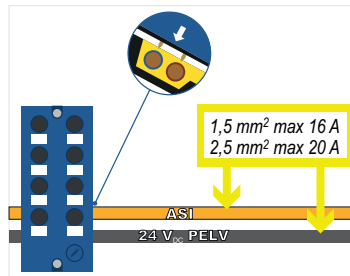

(2) Loop resistance ≤150 Ω

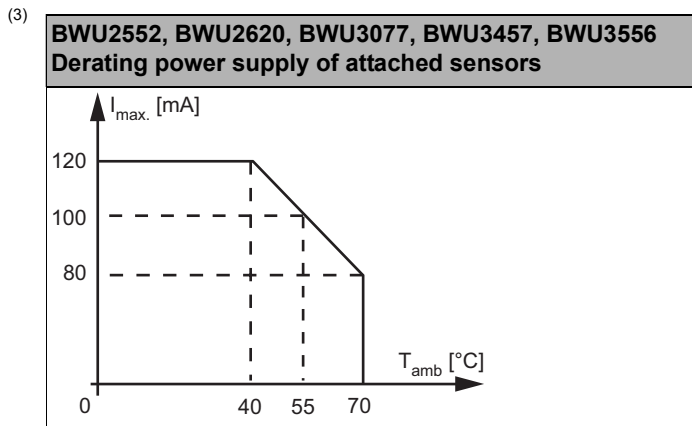

(4) See table "Peripheral fault indication"

(5) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada

(6) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.

# Digital Modules ASi, IP67, M12




Article No.	BWU2770	BWU2651	BWU2983
<b>General data</b>			
Device type	input		
<b>Connection</b>			
ASi/AUX connection	profile cable and piercing		
Periphery connection	M12, Y-wiring	M12, single-wiring	
Length of connector cable	unlimited <sup>(1)</sup>		
<b>ASi</b>			
Profile	slave 1: S-0.A.E (ID1=7 default), slave 2: S-0.A.E (ID1=6 default)		
Address	2 AB slaves		
Required Master profile	≥M3		
As of ASi specification	2.1		
Operating voltage	30 V (18 ... 31.6 V)		
Max. current consumption	60 mA	270 mA	
Max. current consumption without sensor/ actuator supply	60 mA	70 mA	
<b>AUX</b>			
Operating voltage	24 V (18 ... 30 V)	-	
Max. current consumption	3 A	-	
<b>Input</b>			
Number	4		
Power supply	out of AUX	out of ASi	
Sensor supply	short-circuit and overload protected according to EN 61131-2		
Power supply of attached sensors	up to +40 °C	max. 1 A	200 mA <sup>(5)</sup>
	at +55 °C		150 mA <sup>(3)</sup>
	at +70 °C		100 mA <sup>(3)</sup>
Switching threshold	U<5 V (low) U>15 V (high)		
<b>Display</b>			
LED ASi/FLT 1 (red/green)	green: slave online red: slave offline yellow/red flashing: address 0 red/green flashing: peripheral fault <sup>(2)</sup>		
LED ASi/FLT 2 (red/green)	green: slave online red: slave offline yellow/red flashing: address 0 red/green flashing: peripheral fault <sup>(4)</sup> red flashing: slave 2 is switched off, because slave 1 is offline		
LED AUX (green)	on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX	-	
LEDs I1 ... I8 (yellow)	state of inputs I1 ... I8		
<b>Environment</b>			
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529		
Operating altitude	max. 2000 m		
Ambient temperature	-30 °C ... +55 °C (up to max. +70 °C) <sup>(3) (5)</sup>		
Storage temperature	-25 °C ... +85 °C		
Housing	plastic, for screw mounting		
Pollution degree	2		
Protection category	IP67 <sup>(4)</sup>		
Tolerable loading referring to humidity	according to EN 61131-2		
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2		
Max. tolerable vibration stress	5 ... 8 Hz 50 mm <sub>pp</sub> /8 ... 500 Hz 6g, acc. EN 61131-2		

# Digital Modules ASi, IP67, M12

Article No.	BWU2770	BWU2651	BWU2983
Insulation voltage		≥500 V	
Weight		200 g	
Dimensions (W / H / D) in mm		60 / 151 / 31	

- (1) Loop resistance  $\leq 150 \Omega$
- (2) **See table "Peripheral fault indication"**
- (3) Maximum ambient operating temperature  $+55^\circ\text{C}$  according UL certificate for the use in the USA and Canada
- (4) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.

(5)

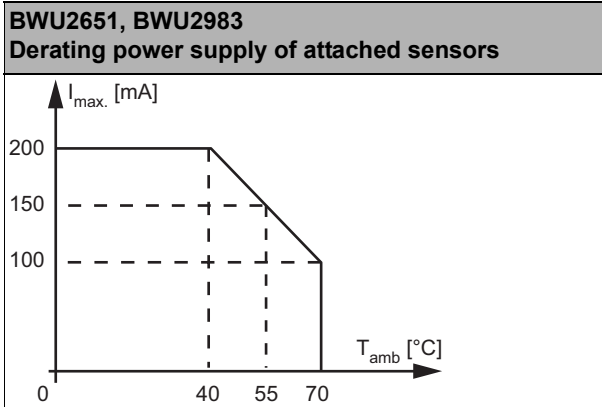

# Digital Modules ASi, IP67, M12




Article No.	BWU3775	BWU3539	BWU3456	BWU3141
<b>General data</b>				
Device type	input / output			
<b>Connection</b>				
ASi/AUX Connection	profile cable and piercing			
Periphery connection	M12, Y-wiring			M12, single-wiring
Length of connector cable	unlimited <sup>(1)</sup>			
<b>ASi</b>				
Profile	S-7.0.E (ID1=F default)	S-7.A.7 (ID1=7 fixed)		
Address	1 single slave	1 AB slave		
Required Master profile	≥M0	≥M4		
As of ASi specification	2.0	3.0		
Operating voltage	30 V (18 ... 31.6 V)			
Max. current consumption	165 mA			
Max. current consumption without sensor/ actuator supply	45 mA			
<b>AUX</b>				
Operating voltage	24 V (18 ... 30 V)			
Max. current consumption	2 A			
<b>Input</b>				
Number	2			
Power supply	out of ASi			
Sensor supply	short-circuit and overload protected according to EN 61131-2			
Power supply of attached sensors	up to +40 °C	120 mA <sup>(2)</sup>		
	at +55 °C	90 mA <sup>(2)</sup>		
	at +70 °C	60 mA <sup>(2)</sup>		
Switching threshold	U<5 V (low) U>15 V (high)			
<b>Output</b>				
Number	2			
Power supply	out of AUX			
Output	short-circuit and overload protected according to EN 61131-2			
Max. output current	up to +40 °C	1 A per output, $\Sigma(\text{Out})$ 2 A <sup>(3)</sup>		
	at +55 °C	1 A per output, $\Sigma(\text{Out})$ 1,5 A <sup>(3)</sup>		
	at +70 °C	1 A per output, $\Sigma(\text{Out})$ 1 A <sup>(3)</sup>		
<b>Display</b>				
LED ASi (green)	on: ASi voltage on flashing: ASi voltage on, but peripheral fault <sup>(4)</sup> or address 0 off: no ASi voltage			
LED FLT/FAULT (red)	on: slave address 0 or slave offline flashing: peripheral fault <sup>(4)</sup> off: slave online			
LED AUX (green)	on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX			
LEDs I1, I2 (yellow)	state of inputs I1, I2			
LEDs O1 / O2 ... (yellow /red)	–	yellow: state of outputs O1, O2 red: overload		
LEDs O3 / O4 ... (yellow /red)	yellow: state of outputs O3, O4 red: overload	–		
<b>Environment</b>				
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529			
Operating altitude	max. 2000 m			
Ambient temperature	-30 °C ... +55 °C <sup>(2)</sup> <sup>(3)</sup> <sup>(5)</sup> (up to max. +70 °C)			

# Digital Modules ASi, IP67, M12


Article No.	BWU3775	BWU3539	BWU3456	BWU3141
Storage temperature	-25 °C ... +85 °C			
Housing	plastic, for DIN rail mounting			
Pollution degree	2			
Protection category	IP67 <sup>(6)</sup>			
Tolerable loading referring to humidity	according to EN 61131-2			
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2			
Max. tolerable vibration stress	5 ... 8 Hz 50 mm <sub>pp</sub> /8 ... 500 Hz 6g, acc. EN 61131-2			
Insulation voltage	≥500 V			
Weight	100 g			
Dimensions (W / H / D) in mm	45 / 80 / 42			

(1) Loop resistance ≤150 Ω

(2)

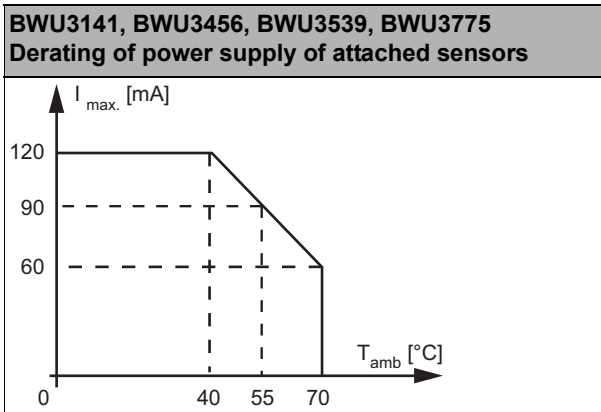

(3)

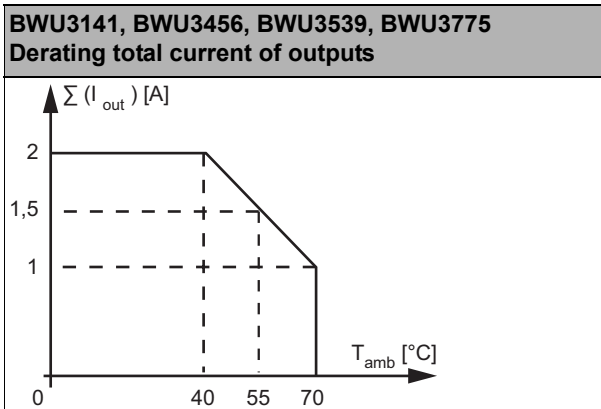

(4) See table "Peripheral fault indication"

(5) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada

(6) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.

# Digital Modules ASi, IP67, M12





Article No.	BWU2767	BWU2547	BWU3887	BWU3240	
<b>General data</b>					
Device type	input / output				
<b>Connection</b>					
ASi/AUX Connection	profile cable and piercing				
Periphery connection	M12, mixed- wiring		M12, mixed- wiring (in-puts/outputs swapped)	M12, mixed- wiring	
Length of connector cable	unlimited <sup>(1)</sup>				
<b>ASi</b>					
Profile	S-7.A.E (ID1=7 default)		S-7.A.7 (ID1=7 fixed)		
Address	1 AB slave				
Required Master profile	≥M3		≥M4		
As of ASi specification	3.0				
Operating voltage	30 V (18 ... 31.6 V)				
Max. current consumption	35 mA			165 mA	
Max. current consumption without sensor/ actuator supply	35 mA			45 mA	
<b>AUX</b>					
Operating voltage	24 V (18 ... 30 V)			–	
Max. current consumption	3 A			–	
<b>Input</b>					
Number	4				
Power supply	out of AUX			out of ASi	
Sensor supply	short-circuit and overload protected according to EN 61131-2				
Power supply of attached sensors	up to +40 °C	max. 1 A			$\sum$ (In/Out) max. 120 mA <sup>(8)</sup>
	at +55 °C				$\sum$ (In/Out) 90 mA <sup>(8)</sup>
	at +70 °C				$\sum$ (In/Out) 60 mA <sup>(8)</sup>
Switching threshold	U < 5 V (low) U > 15 V (high)				
<b>Output</b>					
Number	2		4		
Power supply	out of AUX			out of ASi	
Output	short-circuit and overload protected according to EN 61131-2				
Max. output current	up to +40 °C	1 A per output $\sum$ (Out) 2 A	500 mA per output $\sum$ (Out) 2 A <sup>(7)</sup>	$\sum$ (In/Out) 120 mA <sup>(8)</sup>	
	at +55 °C		500 mA per output $\sum$ (Out) 1,5 A <sup>(7)</sup>	$\sum$ (In/Out) 90 mA <sup>(8)</sup>	
	at +70 °C		500 mA per output $\sum$ (Out) 1 A <sup>(7)</sup>	$\sum$ (In/Out) 60 mA <sup>(8)</sup>	
<b>Display</b>					
LED ASi (green)	on: ASi voltage on flashing: ASi voltage on, but peripheral fault <sup>(2)</sup> or address 0 off: no ASi voltage				
LED FLT/FAULT (red)	on: slave address 0 or slave offline flashing: peripheral fault <sup>(2)</sup> off: slave online				
LED AUX (green)	on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX			–	
LEDs I1 / O1 ... In / On (yellow)	state of inputs/outputs I1 / O1 ... I4 / O4 input <b>or</b> output is on <sup>(3)</sup>				
<b>Environment</b>					
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529				
Operating altitude	max. 2000 m				
Ambient temperature	-30 °C ... +55 °C <sup>(4)</sup> <sup>(5)</sup> <sup>(7)</sup> <sup>(8)</sup> (up to max. +70 °C)				
Storage temperature	-25 °C ... +85 °C				

# Digital Modules ASi, IP67, M12



Article No.	BWU2767	BWU2547	BWU3887	BWU3240
Housing	plastic, for DIN rail mounting			
Pollution degree	2			
Protection category	IP67 <sup>(6)</sup>			
Tolerable loading referring to humidity	according to EN 61131-2			
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2			
Max. tolerable vibration stress	5 ... 8 Hz 50 mm <sub>pp</sub> /8 ... 500 Hz 6g, acc. EN 61131-2			
Insulation voltage	≥500 V			
Weight	100 g			
Dimensions (W / H / D) in mm	45 / 80 / 42			

- (1) Loop resistance ≤150 Ω
- (2) **See table "Peripheral fault indication"**
- (3) **BWU2767:** LEDs I3/O3 and I4/O4 are indicating only the state of inputs I3 and I4 in accordance with the factual input/output assignment.
- (4) Temperature range up to -30°C from Ident.No. ≥16388 (BWU2767).
- (5) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada
- (6) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.

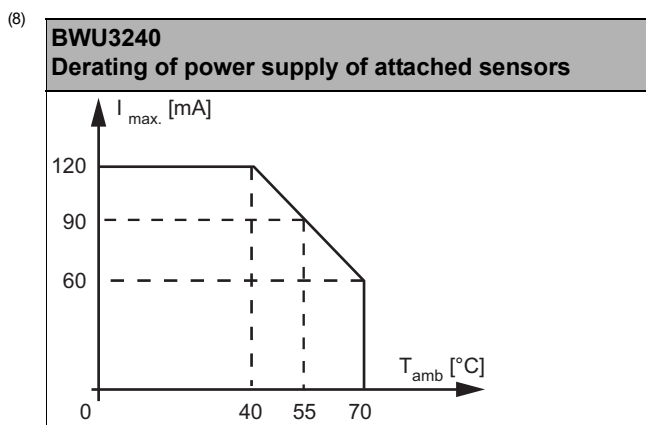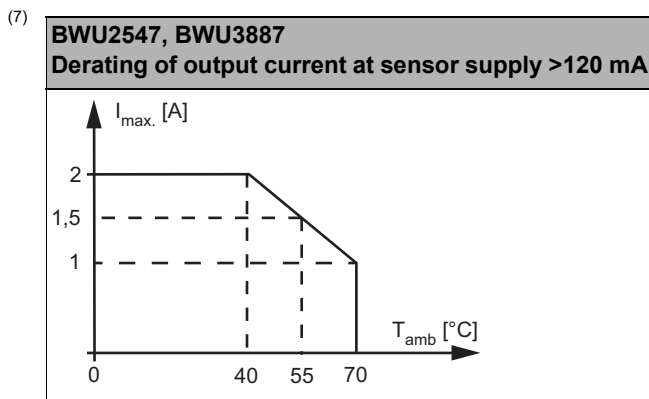

# Digital Modules ASi, IP67, M12




Article No.	BWU2487		BWU3032		BWU3375		BWU3517		
<b>General data</b>									
Device type	input / output								
<b>Connection</b>									
ASi/AUX Connection	profile cable and piercing						M12 <sup>(7)</sup>		
Periphery connection	M12, Y-wiring						M12, single wiring		
Length of connector cable	unlimited <sup>(1)</sup>								
<b>ASi</b>									
Profile	S-7.A.7 (ID1=7 fixed)			S-7.A.0 (ID1=7 default)		S-7.A.7 (ID1=7 fixed)			
Address	1 AB slave								
Required Master profile	≥M4			≥M3		≥M4			
As of ASi specification	3.0			2.1		3.0			
Operating voltage	30 V (18 ... 31.6 V)								
Max. current consumption	165 mA		45 mA		165 mA				
Max. current consumption without sensor/ actuator supply	45 mA								
<b>AUX</b>									
Operating voltage	24 V (18 ... 30 V)								
Max. current consumption	2 A								
<b>Input</b>									
Number	4					2			
Power supply	out of ASi		out of AUX		out of ASi				
Sensor supply	short-circuit and overload protected according to EN 61131-2								
Power supply of attached sensors	up to +40 °C	120 mA <sup>(2)</sup>		1 A		120 mA <sup>(2)</sup>		120 mA <sup>(8)</sup>	
	at +55 °C	90 mA <sup>(2)</sup>				90 mA <sup>(2)</sup>		90 mA <sup>(8)</sup>	
	at +70 °C	60 mA <sup>(2)</sup>				60 mA <sup>(2)</sup>		60 mA <sup>(8)</sup>	
Switching threshold	U < 5 V (low) U > 15 V (high)								
<b>Output</b>									
Number	4			3		2			
Power supply	out of AUX								
Output	short-circuit and overload protected according to EN 61131-2								
Max. output current	up to +40 °C	500 mA per output					1 A per output, $\Sigma(\text{Out}) 2 \text{ A}^{(9)}$		
	at +55 °C						1 A per output, $\Sigma(\text{Out}) 1,5 \text{ A}^{(9)}$		
	at +70 °C						1 A per output, $\Sigma(\text{Out}) 1 \text{ A}^{(9)}$		
<b>Display</b>									
LED ASi (green)	on: ASi voltage on flashing: ASi voltage on, but peripheral fault <sup>(3)</sup> or address 0 off: no ASi voltage								
LED FLT/FAULT (red)	on: slave address 0 or slave offline flashing: peripheral fault <sup>(4)</sup> off: slave online								
LED AUX (green)	on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX								
LEDs I1 / I2 ... In/In+1 (yellow)	state of inputs I1 / I2 ... I3 / I4: at least 1 input of input pair is on						state of inputs I1 / I2		
LEDs O1/O2 ... On / On+1 (yellow)	state of outputs O1 / O2 ... O3 / O4: at least 1 output of output pair is on			state of outputs O1 / O2 ... O3: at least 1 output of output pair is on		-			
LEDs O1, O2 (yellow / red)	-						yellow: state of outputs O1 / O2 red: overload		

# Digital Modules ASi, IP67, M12



Article No.	BWU2487	BWU3032	BWU3375	BWU3517
<b>Environment</b>				
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529			
Operating altitude	max. 2000 m			
Ambient temperature	-30 °C ... +55 °C <sup>(2) (4) (5)</sup> (up to max. +70 °C)			-30 °C ... +55 °C (up to max. +70 °C) <sup>(8) (9) (5)</sup>
Storage temperature	-25 °C ... +85 °C			
Housing	plastic, for DIN rail mounting			
Pollution degree	2			
Protection category	IP67 <sup>(6)</sup>			
Tolerable loading referring to humidity	according to EN 61131-2			
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2			
Max. tolerable vibration stress	5 ... 8 Hz 50 mm <sub>pp</sub> /8 ... 500 Hz 6g, acc. EN 61131-2			
Insulation voltage	≥500 V			
Weight	100 g			
Dimensions (W / H / D) in mm	45 / 80 / 42			

(1) Loop resistance ≤150 Ω

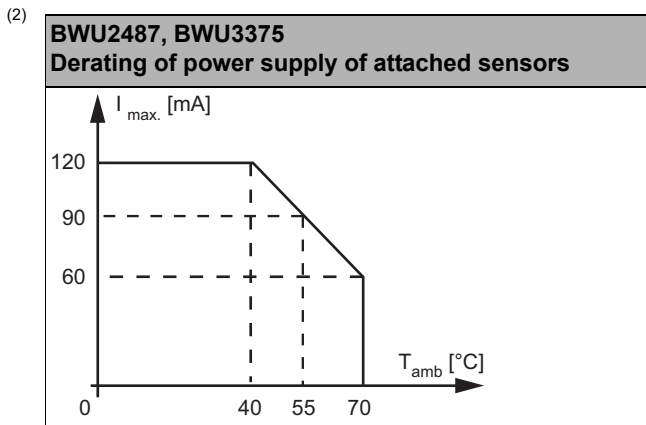

(3) See table "Peripheral fault indication"

(4) Temperature range up to -30°C from Ident.No. ≥16381 (BWU3032).


(5) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada

(6) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.


(7) **Line protection:**

If the module is supplied via a M12 connection with A or B coding, it may only be used with a current load of max. 4 A per pin in acc. with IEC 61076-2-101 and IEC 61076-2-109. A fused tap is recommended. There is no such limitation for modules supplied via piercing contacts.



**Connection to ASi and AUX via M12**

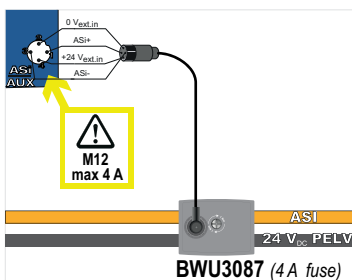

**via piercing contacts**



# Digital Modules ASi, IP67, M12

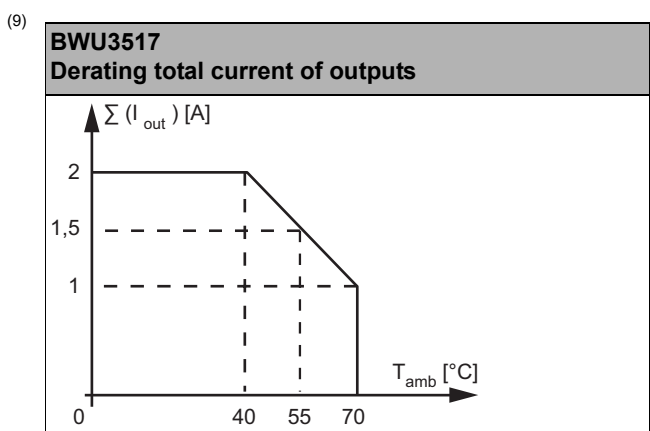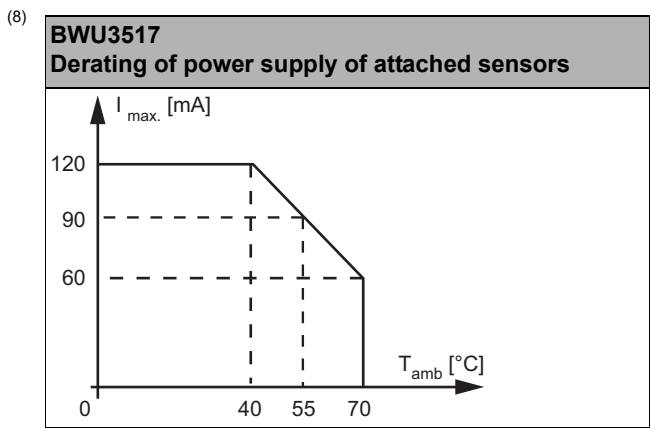

Article No.	BWU3496	BWU3540	BWU2626	BWU3426	BWU2617	BWU2684
<b>General data</b>						
Device type	input / output					
<b>Connection</b>						
ASi/AUX Connection	profile cable and piercing					
Periphery connection	M12, single-wiring		M12, Y-wiring	M12, single-wiring		
Length of connector cable	unlimited <sup>(1)</sup>					
<b>ASi</b>						
Profile	S-7.A.0 (ID1=7 default)	S-7.0.E (ID1=F default)	S-7.A.7 (ID1=7 fixed)		S-7.0.E (ID1=F default)	
Address	1 AB slave	1 single slave	1 AB slave		1 single slave	
Required Master profile	≥M3	≥M0	≥M4		≥M0	
As of ASi specification	2.1	2.0	3.0		2.0	
Operating voltage	30 V (18 ... 31.6 V)					
Max. current consumption	165 mA					
Max. current consumption without sensor/ actuator supply	45 mA					
<b>AUX</b>						
Operating voltage	24 V (18 ... 30 V)					
Max. current consumption	6 A	8 A	3 A			

# Digital Modules ASi, IP67, M12




Article No.	BWU3496	BWU3540	BWU2626	BWU3426	BWU2617	BWU2684
<b>Input</b>						
Number	4					
Power supply	out of ASi					
Sensor supply	short-circuit and overload protected according to EN 61131-2					
Power supply of attached sensors	up to +40 °C	120 mA <sup>(2)</sup>				
	at +55 °C	100 mA <sup>(2)</sup>				
	at +70 °C	80 mA <sup>(2)</sup>				
Switching threshold	U < 5 V (low) U > 15 V (high)					
<b>Output</b>						
Number	3	4				
Power supply	out of AUX					
Output	short-circuit and overload protected according to EN 61131					
Max. output current	up to +40 °C	2 A per output, $\Sigma$ (Out) 6 A <sup>(3)</sup>	2 A per output, $\Sigma$ (Out) 8 A <sup>(3)</sup>	1 A per output, $\Sigma$ (Out) 3 A <sup>(7)</sup>	2 A per output, $\Sigma$ (Out) 8 A <sup>(3)</sup>	1 A per output, $\Sigma$ (Out) 3 A <sup>(7)</sup>
	at +55 °C	1,5 A per output, $\Sigma$ (Out) 4,5 A <sup>(3)</sup>	1,5 A per output, $\Sigma$ (Out) 6 A <sup>(3)</sup>		1,5 A per output, $\Sigma$ (Out) 6 A <sup>(3)</sup>	
	at +70 °C	1 A per output, $\Sigma$ (Out) 3 A <sup>(3)</sup>	1 A per output, $\Sigma$ (Out) 4 A <sup>(3)</sup>	1 A per output, $\Sigma$ (Out) 2 A <sup>(7)</sup>	1 A per output, $\Sigma$ (Out) 4 A <sup>(3)</sup>	1 A per output, $\Sigma$ (Out) 2 A <sup>(7)</sup>
<b>Display</b>						
LED ASI (green)	on: ASi voltage on flashing: ASi voltage on, but peripheral fault <sup>(4)</sup> or address 0 off: no ASi voltage					
LED FLT/FAULT (red)	on: slave address 0 or slave offline flashing: peripheral fault <sup>(4)</sup> off: slave online					
LED AUX (green)	on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX					
LEDs I1 ... In (yellow)	state of inputs I1 ... I4					
LEDs O1 ... On (yellow)	state of outputs O1 ... O3	state of outputs O1 ... O4	-			state of outputs O1 ... O4
LEDs O1 ... On (yellow / red)	-		yellow: state of outputs O1 ... O4 red: overload			-
<b>Environment</b>						
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529					
Operating altitude	max. 2000 m					
Ambient temperature	-30 °C ... +55 °C <sup>(2)</sup> <sup>(3)</sup> <sup>(5)</sup> <sup>(7)</sup> (up to max. +70 °C)					
Storage temperature	-30 °C ... +85 °C					
Housing	plastic, for screw mounting					
Pollution degree	2					
Protection category	IP67 <sup>(6)</sup>					
Tolerable loading referring to humidity	according to EN 61131-2					
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2					
Max. tolerable vibration stress	5 ... 8 Hz 50 mm <sub>pp</sub> /8 ... 500 Hz 6g, acc. EN 61131-2					
Insulation voltage	≥500 V					
Weight	200 g					
Dimensions (W / H / D) in mm	60 / 151 / 31					


(1) Loop resistance ≤150 Ω

## Digital Modules ASi, IP67, M12

- (2) **BWU2617, BWU2626, BWU3426, BWU2684,  
BWU3496, BWU3540**  
Derating of power supply of attached sensors

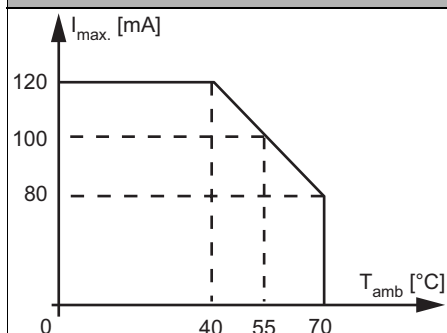


- (3) **BWU3426, BWU3496, BWU3450**  
Derating output current per output

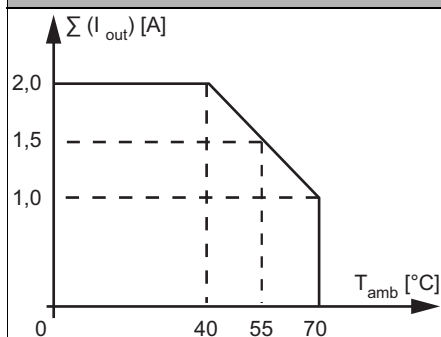

- (4) See table "Peripheral fault indication"  
 (5) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada  
 (6) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.

- (7) **BWU2617, BWU2626, BWU2645, BWU2684,  
BWU2810**  
Derating total current of outputs

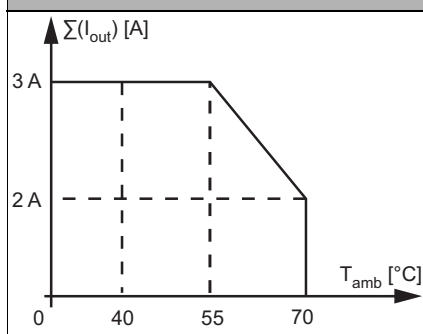

# Digital Modules ASi, IP67, M12




Article No.	BWU3892		BWU2619		BWU2652		
<b>General data</b>							
Device type	input / output				output		
<b>Connection</b>							
ASi/AUX Connection	profile cable and piercing						
Periphery connection	M12, Y-wiring						
Length of connector cable	unlimited <sup>(1)</sup>						
<b>ASi</b>							
Profile	slave 1: S-7.A.7 (ID1=7 fixed), slave 2: S-7.A.7 (ID1=6 default)						
Address	2 AB slaves						
Required Master profile	≥M4						
As of ASi specification	3.0						
Operating voltage	30 V (18 ... 31.6 V)						
Max. current consumption	70 mA		270 mA		60 mA		
Max. current consumption without sensor/ actuator supply	70 mA				60 mA		
<b>AUX</b>							
Operating voltage	24 V (18 ... 30 V)						
Max. current consumption	7 A		6 A				
<b>Input</b>							
Number	8				-		
Power supply	out of AUX		out of ASi		-		
Sensor supply	short-circuit and overload protected according to EN 61131-2						
Power supply of attached sensors	up to +40 °C	1 A <sup>(2)</sup>		200 mA <sup>(6)</sup>		-	
	at +55 °C			150 mA <sup>(2)</sup>		-	
	at +70 °C	0,5 A		100 mA <sup>(2)</sup>		-	
Switching threshold	U<5 V (low) U>15 V (high)				-		
<b>Output</b>							
Number	8						
Power supply	out of AUX						
Output	short-circuit and overload protected according to EN 61131-2						
Max. output current	up to +40 °C	1 A per output, $\sum(O1...O4) 3 A + \sum(O5-O8) 3 A$ <sup>(3)</sup>				1 A per output, $\sum(O1...O4) 3 A + \sum(O5...O8) 3 A$ <sup>(7)</sup>	
	at +55 °C	1 A per output, $\sum(O1...O4) 1,625 A + \sum(O5...O8) 1,625 A$ <sup>(3)</sup>					
	at +70 °C	0,25 A per output, $\sum(O1...O4) 0,25 A + \sum(O5...O8) 0,25 A$ <sup>(3)</sup>				1 A per output, $\sum(O1...O4) 2 A + \sum(O5...O8) 2 A$ <sup>(7)</sup>	
<b>Display</b>							
LED ASI/FLT 1 (red/green)	green: slave online red: slave offline yellow/red flashing: address 0 red/green flashing: peripheral fault <sup>(4)</sup>						
LED ASI/FLT 2 (red/green)	green: slave online red: slave offline yellow/red flashing: address 0 red/green flashing: peripheral fault <sup>(4)</sup> red flashing: slave 2 is switched off, because slave 1 is offline						
LED AUX (green)	on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX						
LEDs I1 / I2 ... In/In+1 (yellow)	state of inputs I1 / I2 ... I7 / I8: at least 1 input of input pair is on				-		
LEDs O1 ... On (yellow / red)	-				yellow: state of outputs O1 ... O8 red: overload		
LEDs O1/O2 ... On / On+1(yellow)	state of outputs O1 / O2 ... O7 / O8: at least 1 output of output pair is on				-		

# Digital Modules ASi, IP67, M12


Article No.	BWU3892	BWU2619	BWU2652
<b>Environment</b>			
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529		
Operating altitude	max. 2000 m		
Ambient temperature	-30 °C ... +55 °C <sup>(6)</sup> <sup>(3)</sup> <sup>(4)</sup> <sup>(7)</sup> (up to max. +70 °C)		
Storage temperature	-30 °C ... +85 °C		
Housing	plastic, for screw mounting		
Pollution degree	2		
Protection category	IP67 <sup>(5)</sup>		
Tolerable loading referring to humidity	according to EN 61131-2		
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2		
Max. tolerable vibration stress	5 ... 8 Hz 50 mm <sub>pp</sub> /8 ... 500 Hz 6g, acc. EN 61131-2		
Insulation voltage	≥500 V		
Weight	200 g		
Dimensions (W / H / D) in mm	60 / 151 / 31		

(1) Loop resistance ≤150 Ω

(2)

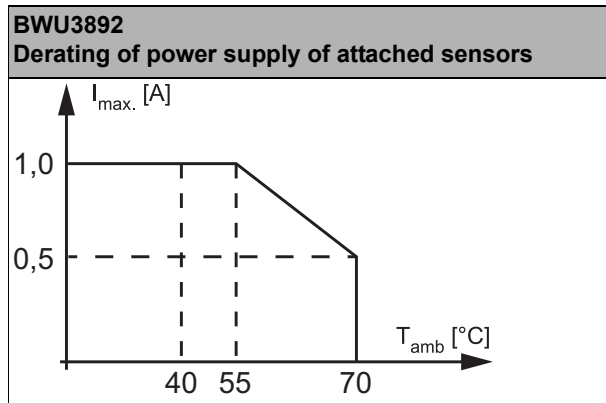

(3)

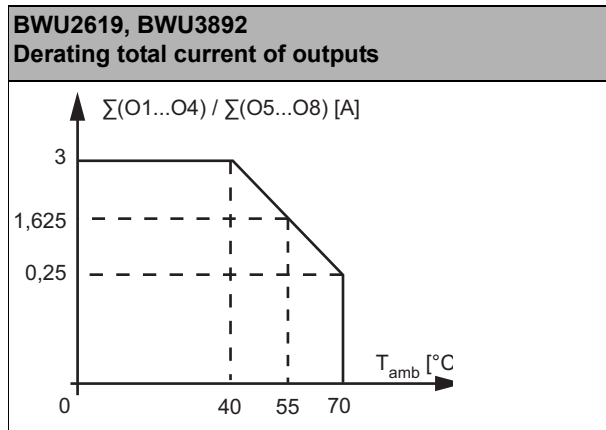


(4) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada


(5) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.

# Digital Modules ASi, IP67, M12

(6)

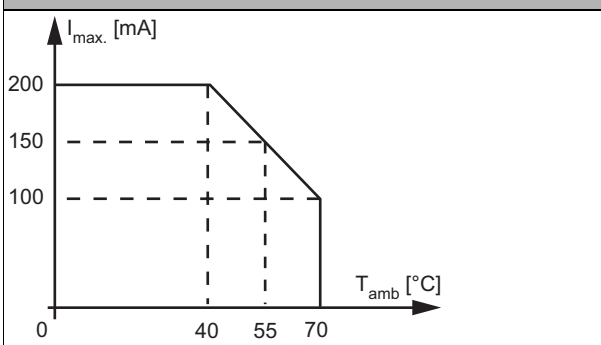**BWU2619****Derating of power supply of attached sensors**

(7)

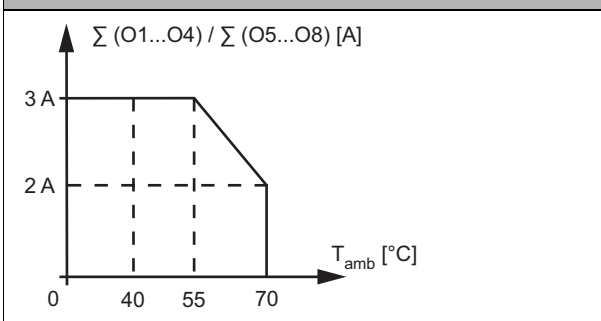**BWU2652****Derating total current of outputs**

# Digital Modules ASi, IP67, M12




Article No.	BWU3496	BWU3540	BWU2626	BWU2617	BWU2684
<b>General data</b>					
Device type	input / output				
<b>Connection</b>					
ASi/AUX Connection	profile cable and piercing				
Periphery connection	M12, single-wiring	M12, Y-wiring	M12, single-wiring		
Length of connector cable	unlimited <sup>(1)</sup>				
<b>ASi</b>					
Profile	S-7.A.0 (ID1=7 default)	S-7.0.E (ID1=F default)	S-7.A.7 (ID1=7 fixed)	S-7.0.E (ID1=F default)	
Address	1 AB slave	1 single slave	1 AB slave	1 single slave	
Required Master profile	≥M3	≥M0	≥M4	≥M0	
As of ASi specification	2.1	2	3	2	
Operating voltage	30 V (18 ... 31.6 V)				
Max. current consumption	165 mA				
Max. current consumption without sensor/ actuator supply	45 mA				
<b>AUX</b>					
Operating voltage	24 V (18 ... 30 V)				
Max. current consumption	6 A	8 A	3 A		
<b>Input</b>					
Number	4				
Power supply	out of ASi				
Sensor supply	short-circuit and overload protected according to EN 61131-2				
Power supply of attached sensors	up to +40 °C	120 mA <sup>(2)</sup>			
	at +55 °C	100 mA <sup>(2)</sup>			
	at +70 °C	80 mA <sup>(2)</sup>			
Switching threshold	U<5 V (low) U>15 V (high)				
<b>Output</b>					
Number	3	4			
Power supply	out of AUX				
Output	short-circuit and overload protected according to EN 61131				
Max. output current	up to +40 °C	2 A per output, Σ (Out) 6 A <sup>(3)</sup>	2 A per output, Σ (Out) 8 A <sup>(3)</sup>	1 A per output, Σ (Out) 3 A <sup>(7)</sup>	
	at +55 °C	1,5 A per output, Σ (Out) 4,5 A <sup>(3)</sup>	1,5 A per output, Σ (Out) 6 A <sup>(3)</sup>		
	at +70 °C	1 A per output, Σ (Out) 3 A <sup>(3)</sup>	1 A per output, Σ (Out) 4 A <sup>(3)</sup>	1 A per output, Σ (Out) 2 A <sup>(7)</sup>	

# Digital Modules ASi, IP67, M12




Article No.	BWU3496	BWU3540	BWU2626	BWU2617	BWU2684
<b>Display</b>					
LED ASi (green)	on: ASi voltage on flashing: ASi voltage on, but peripheral fault <sup>(4)</sup> or address 0 off: no ASi voltage				
LED FLT/FAULT (red)	on: slave address 0 or slave offline flashing: peripheral fault <sup>(4)</sup> off: slave online				
LED AUX (green)	on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX				
LEDs I1 ... I4 (yellow)	state of inputs I1 ... I4				
LEDs O1 ... O3 (yellow)	state of outputs O1 ... O3	state of outputs O1 ... O4	-		state of outputs O1 ... O4
LEDs O1 ... O4 (yellow / red)	-		yellow: state of outputs O1 ... O4 red: overload	-	
<b>Environment</b>					
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529				
Operating altitude	max. 2000 m				
Ambient temperature	-30 °C ... +55 °C <sup>(2)</sup> <sup>(3)</sup> <sup>(5)</sup> <sup>(7)</sup> (up to max. +70 °C)				
Storage temperature	-30 °C ... +85 °C				
Housing	plastic, for screw mounting				
Pollution degree	2				
Protection category	IP67 <sup>(6)</sup>				
Tolerable loading referring to humidity	according to EN 61131-2				
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2				
Max. tolerable vibration stress	5 ... 8 Hz 50 mm <sub>pp</sub> /8 ... 500 Hz 6g, acc. EN 61131-2				
Insulation voltage	≥500 V				
Weight	200 g				
Dimensions (W / H / D) in mm	60 / 151 / 31				

(1) Loop resistance ≤150 Ω

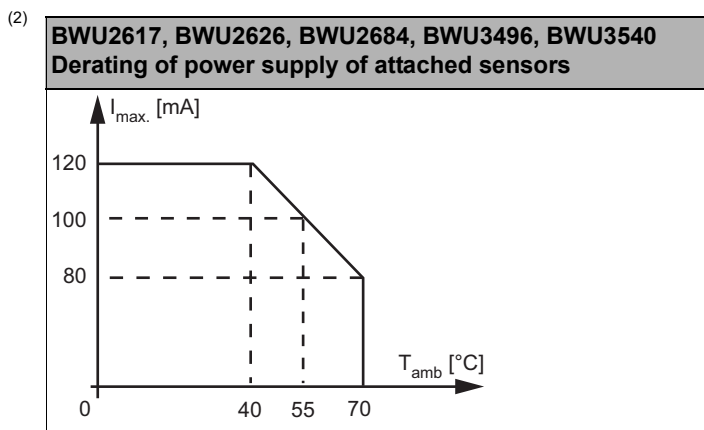


# Digital Modules ASi, IP67, M12

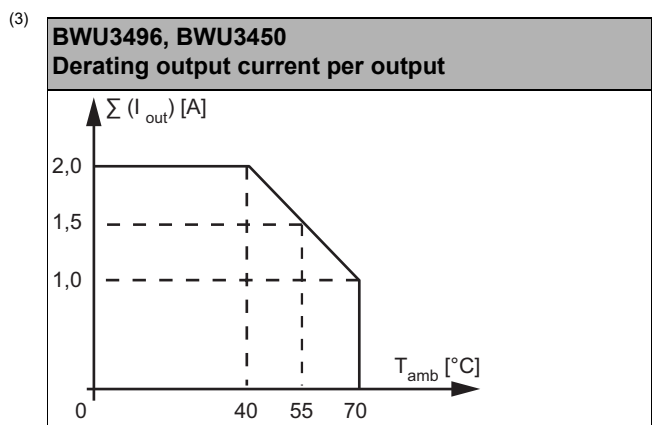

(4) See table "Peripheral fault indication"

(5) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada

(6) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.

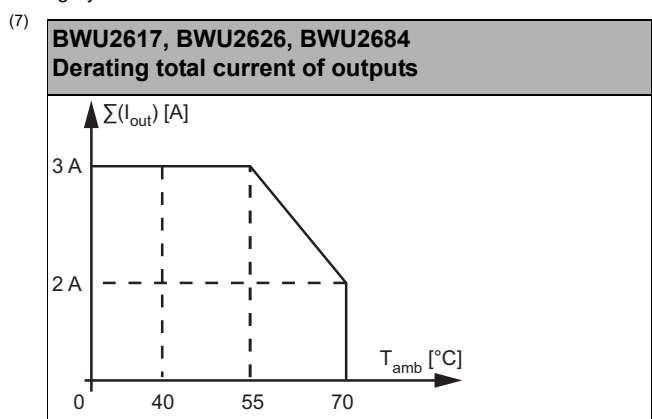

Article No.	BWU3510	BWU2810	BWU2645
<b>General data</b>			
Device type	input / output		
<b>Connection</b>			
ASi/AUX Connection	profile cable and piercing		M12 <sup>(6)</sup>
Periphery connection	M12, Y-wiring	M12, single-wiring	
Length of connector cable	unlimited <sup>(1)</sup>		
<b>ASi</b>			
Profile	S-7.A.7 (ID1=7 fixed)		
Address	1 AB slave		
Required Master profile	≥M4		
As of ASi specification	3.0		
Operating voltage	30 V (18 ... 31.6 V)		
Max. current consumption	35 mA		
Max. current consumption without sensor/ actuator supply	35 mA		
<b>AUX</b>			
Operating voltage	24 V (18 ... 30 V)		
Max. current consumption	3 A		


# Digital Modules ASi, IP67, M12



Article No.	BWU3510	BWU2810	BWU2645
<b>Input</b>			
Number	4		
Power supply	out of AUX		
Sensor supply	short-circuit and overload protected according to EN 61131-2		
Power supply of attached sensors	up to +40 °C	max. 1 A	
	at +55 °C		
	at +70 °C		
Switching threshold	U < 5 V (low) U > 15 V (high)		
<b>Output</b>			
Number	4		
Power supply	out of AUX		
Output	short-circuit and overload protected according to EN 61131		
Max. output current	up to +40 °C	1 A per output, $\Sigma(\text{Out}) 3 \text{ A}^{(2)}$	
	at +55 °C		
	at +70 °C	1 A per output, $\Sigma(\text{Out}) 2 \text{ A}^{(3)}$	
<b>Display</b>			
LED ASI (green)	on: ASi voltage on flashing: ASi voltage on, but peripheral fault <sup>(3)</sup> or address 0 off: no ASi voltage		
LED FLT/FAULT (red)	on: slave address 0 or slave offline flashing: peripheral fault <sup>(4)</sup> off: slave online		
LED AUX (green)	on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX		
LEDs I1 ... In (yellow)	state of inputs I1 ... I4		
LEDs O1 ... On (yellow / red)	yellow: state of outputs O1 ... O4 red: overload		
<b>Environment</b>			
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529		
Operating altitude	max. 2000 m		
Ambient temperature	-30 °C ... +55 °C <sup>(2)</sup> <sup>(4)</sup> (up to max. +70 °C)		
Storage temperature	-30 °C ... +85 °C		
Housing	plastic, for screw mounting		
Pollution degree	2		
Protection category	IP67 <sup>(5)</sup>		
Tolerable loading referring to humidity	according to EN 61131-2		
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2		
Max. tolerable vibration stress	5 ... 8 Hz 50 mm <sub>pp</sub> /8 ... 500 Hz 6g, acc. EN 61131-2		
Insulation voltage	≥500 V		
Weight	200 g		
Dimensions (W / H / D) in mm	60 / 151 / 31		

(1) Loop resistance ≤150 Ω

# Digital Modules ASi, IP67, M12

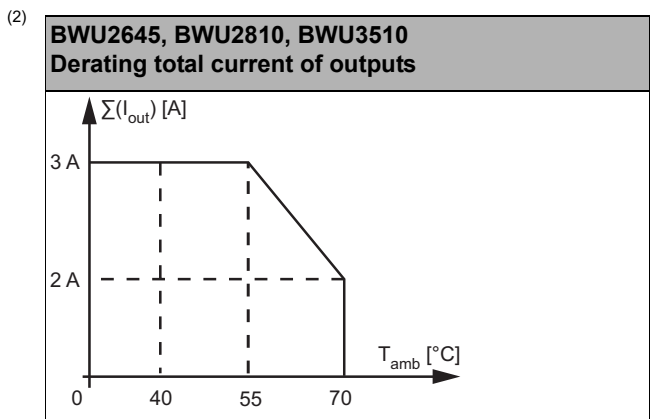

(3) See table "Peripheral fault indication"


(4) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada

(5) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.


(6) **Line protection:**

If the module is supplied via a M12 connection with A or B coding, it may only be used with a current load of max. 4 A per pin in acc. with IEC 61076-2-101 and IEC 61076-2-109. A fused tap is recommended. There is no such limitation for modules supplied via piercing contacts.

**Connection to ASi and AUX via M12**

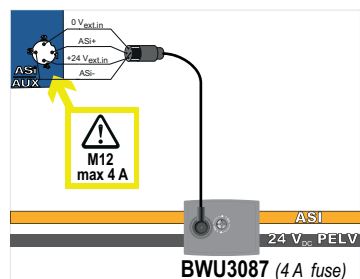

**via piercing contacts**

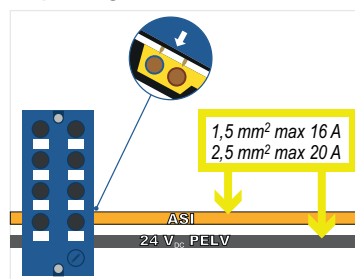


Article No.	BWU2713	BWU2594	BWU2728
<b>General data</b>			
Device type	output		
<b>Connection</b>			
ASi/AUX Connection	profile cable and piercing		
Periphery connection	M12, Y-wiring		
Length of connector cable	unlimited <sup>(1)</sup>		
<b>ASi</b>			
Profile	S-7.F.E (ID1=F default)	S-7.A.7 (ID1=7 fixed)	
Address	1 single slave	1 AB slave	
Required Master profile	≥M0	≥M4	
As of ASi specification	2	3	
Operating voltage	30 V (18 ... 31.6 V)		
Max. current consumption	35 mA		
Max. current consumption without sensor/ actuator supply	35 mA		
<b>AUX</b>			
Operating voltage	24 V (18 ... 30 V)		
Max. current consumption	3 A		8 A

# Digital Modules ASi, IP67, M12

Article No.	BWU2713	BWU2594	BWU2728
<b>Output</b>			
Number	4		
Power supply	out of AUX		
Output	short-circuit and overload protected according to EN 61131		
Max. output current	up to +40 °C	1 A per output $\Sigma$ (Out) 3 A <sup>(2)</sup>	2 A per output, $\Sigma$ (Out) 8 A <sup>(6) (7)</sup>
	at +55 °C		2 A per output, $\Sigma$ (Out) 4 A <sup>(6) (7)</sup>
	at +70 °C	1 A per output $\Sigma$ (Out) 2 A <sup>(2)</sup>	–
<b>Display</b>			
LED ASi (green)	on: ASi voltage on flashing: ASi voltage on, but peripheral fault <sup>(3)</sup> or address 0 off: no ASi voltage		
LED FLT/FAULT (red)	on: slave address 0 or slave offline flashing: peripheral fault <sup>(3)</sup> off: slave online		
LED AUX (green)	on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX		
LEDs O1 ... On (yellow /red)	yellow: state of outputs O1 ... O4 red: overload		
<b>Environment</b>			
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131-2 EN 60529		
Operating altitude	max. 2000 m		
Ambient temperature	-30 °C ... +55 °C (up to max. +70 °C) <sup>(2) (4) (6)</sup>		
Storage temperature	-30 °C ... +85 °C		
Housing	plastic, for DIN rail mounting		
Pollution degree	2		
Protection category	IP67 <sup>(5)</sup>		
Tolerable loading referring to humidity	according to EN 61131-2		
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2		
Max. tolerable vibration stress	5 ... 8 Hz 50 mm <sub>pp</sub> /8 ... 500 Hz 6g, acc. EN 61131-2		
Insulation voltage	≥500 V		
Weight	100 g		
Dimensions (W / H / D) in mm	45 / 80 / 42		

(1) Loop resistance ≤150 Ω

(2)

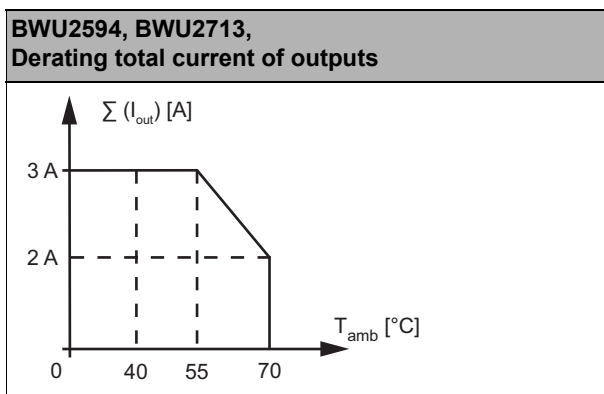


(3) See table "Peripheral fault indication"

(4) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada.

# Digital Modules ASi, IP67, M12




(5) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.

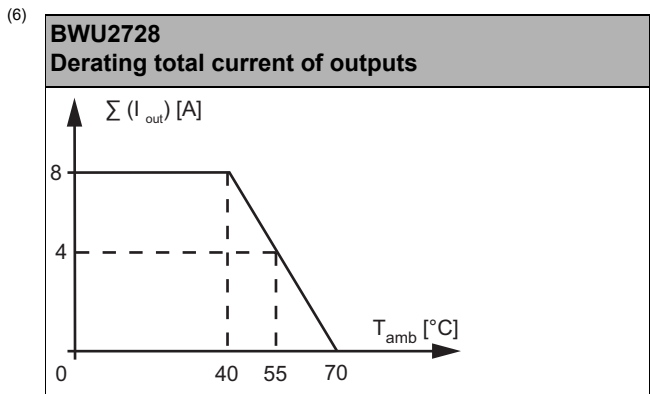

(7) To power consumers whose current draw is greater than 2A, two or more outputs can be combined with each other. The data bits of the bundled outputs must be set at the same time.

## Dimensional drawings

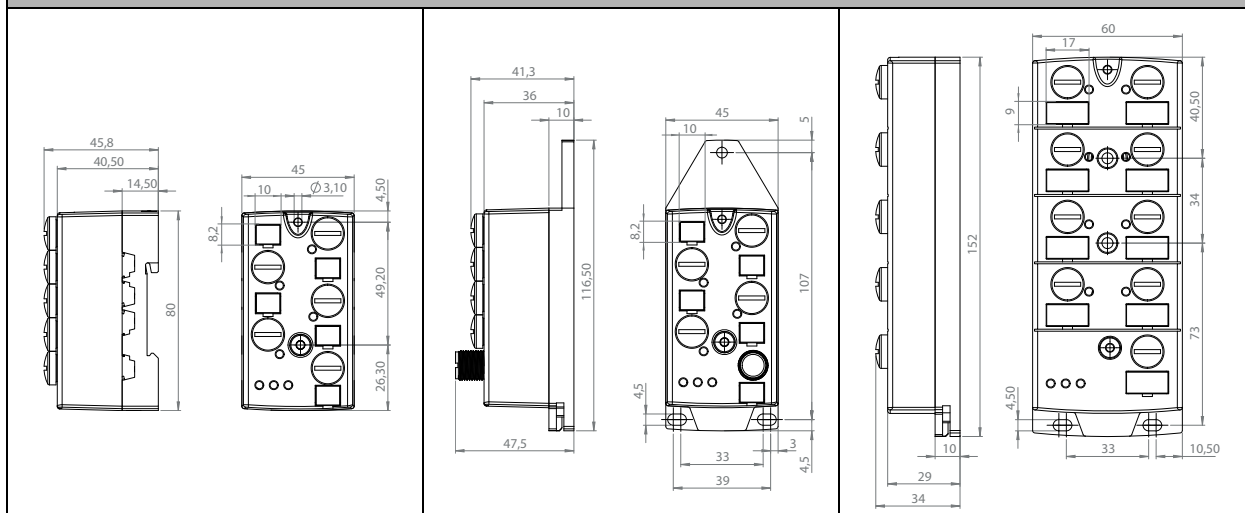

## UL-specifications (UL508)

**BWU2547, BWU2552, BWU2594, BWU2617, BWU2619, BWU2620, BWU2626, BWU3426, BWU2645, BWU2651, BWU2652, BWU2684, BWU2713, BWU2725, BWU2728, BWU2767, BWU2770, BWU2810, BWU2983, BWU3032, BWU3077, BWU3141, BWU3240, BWU3375, BWU3539, BWU3456, BWU3457, BWU3496, BWU3510, BWU3517, BWU3540, BWU3556, BWU3775, BWU3887, BWU3892**

External protection	An isolated source with a secondary open circuit voltage of $\leq 30 V_{DC}$ with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.

# Digital Modules ASi, IP67, M12



Article no.	Peripheral fault indication		
	Overload sensor supply	Output short circuited	AUX voltage missing
BWU2487	•	-	-
BWU2547	-	-	•
BWU2552	•	-	-
BWU2594	•	•	•
BWU2617	•	•	-
BWU2619	•	•	-
BWU2620	•	-	-
BWU2626	•	•	-
BWU3426	•	-	-
BWU2645	•	•	-
BWU2651	•	-	-
BWU2652	•	•	•
BWU2684	•	•	-
BWU2713	•	•	•
BWU2725	•	-	•
BWU2728	•	•	•
BWU2767	•	-	•
BWU2770	•	-	•
BWU2810	•	•	-
BWU2983	•	-	-
BWU3032	•	-	-
BWU3077	•	-	-
BWU3141	•	•	•
BWU3240	•	-	-
BWU3375	•	-	-
BWU3539	•	•	-
BWU3456	•	•	•
BWU3457	•	-	-
BWU3496	•	-	-
BWU3510	•	•	-
BWU3517	•	•	•
BWU3540	•	-	-
BWU3556	•	-	-
BWU3775	•	•	-
BWU3887	-	-	•
BWU3892	•	•	-

# Digital Modules ASi, IP67, M12



Programming	ASi bit assignment			
Bit	D3	D2	D1	D0
	<b>input</b>			
BWU2487 / BWU2547 / BWU2552 / BWU2617 / BWU2620 / BWU2626 / BWU3426 / BWU2645 / BWU2684 / BWU2725 / BWU2767 / BWU2810 / BWU3032 / BWU3077 / BWU3240 / BWU3375 / BWU3496 / BWU3510 / BWU3556 / BWU3540 / BWU3457 / BWU3887	I4	I3	I2	I1
BWU3141 / BWU3456 BWU3539 / BWU3517 / BWU3775	–	–	I2	I1
BWU2619 / BWU2651 / BWU2770 / BWU2983 / BWU3892	slave 1: I4 slave 2: I8	slave 1: I3 slave 2: I7	slave 1: I2 slave 2: I6	slave 1: I1 slave 2: I5
	<b>output</b>			
BWU2487 / BWU2547 / BWU2594 / BWU2617 / BWU2626 / BWU3426 / BWU2645 / BWU2684 / BWU2713 / BWU2728 / BWU2810 / BWU3032 / BWU3240 / BWU3510 / BWU3540 / BWU3887	O4	O3	O2	O1
BWU2767 / BWU3141 / BWU3456 / BWU3517	–	–	O2	O1
BWU3539 / BWU3775	O4	O3	–	–
BWU3375 / BWU3496	–	O3	O2	O1
BWU2619 / BWU2652 / BWU3892	slave 1: O4 slave 2: O8	slave 1: O3 slave 2: O7	slave 1: O2 slave 2: O6	slave 1: O1 slave 2: O5


Programming	Parameter bits			
Bit	P3	P2	P1	P0
BWU2652	not used	0= on / 1= off (synchronous I/O mode)	–	not used, Watchdog always on
BWU2594 / BWU2713			0= off / 1= on (peripheral fault, if AUX missing)	0= off / 1= on (Watchdog)
BWU2728				
BWU2487 / BWU2547 / BWU2617 / BWU2626 / BWU3426 / BWU2645 / BWU2684 / BWU2767 / BWU2810 / BWU3032 / BWU3141 / BWU3240 / BWU3375 / BWU3456 / BWU3539 / BWU3496 / BWU3510 / BWU3517 / BWU3540 / BWU3775 / BWU3887			0= on / 1= off (data input filter 128µs)	0= off / 1= on (peripheral fault)
BWU2552 / BWU2620 / BWU2651 / BWU2725 / BWU2770 / BWU2983 / BWU3077 / BWU3457 BWU3556				
BWU2619 / BWU3892			not used, Watchdog always on	

# Digital Modules ASi, IP67, M12

## Pin assignment

Signal name	Explanation
Ix	digital input x
Ox	digital output x
24V <sub>ext out</sub>	power supply, out of external voltage, positive pole (AUX, actuator supply)
0V <sub>ext out</sub>	power supply, out of external voltage, negative pole (AUX, actuator supply)
24V <sub>out of ASi</sub>	power supply, out of ASi, positive pole (sensor supply)
0V <sub>out of ASi</sub>	power supply, out of ASi, negative pole (sensor supply)
ASi +, ASi -	connection to ASi bus
n.c. (not connected)	not connected



Connections							
Article no.	M12 connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5
BWU3141	X1	I1	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I1	n.c.
	X2	O1	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O1	n.c.
	X3	I2	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I2	n.c.
	X4	O2	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O2	n.c.
	ADDR (dummy plug)	connection for ASi addressing device					
BWU3456	X1	I1	24 V <sub>out of ASi</sub>	I2	0 V <sub>out of ASi</sub>	I1	n.c.
	X2	O1	24 V <sub>ext out</sub>	O2	0 V <sub>ext out</sub>	O1	n.c.
	X3	I2	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I2	n.c.
	X4	O2	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O2	n.c.
	ADDR (dummy plug)	connection for ASi addressing device					
BWU3539 BWU3775	X1	I1	24 V <sub>out of ASi</sub>	I2	0 V <sub>out of ASi</sub>	I1	n.c.
	X2	O3	24 V <sub>ext out</sub>	O4	0 V <sub>ext out</sub>	O3	n.c.
	X3	I2	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I2	n.c.
	X4	O4	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O4	n.c.
	ADDR (dummy plug)	connection for ASi addressing device					
BWU2487	X1	I1/I2	24 V <sub>out of ASi</sub>	I2	0 V <sub>out of ASi</sub>	I1	n.c.
	X2	O1/O2	24 V <sub>ext out</sub>	O2	0 V <sub>ext out</sub>	O1	n.c.
	X3	I3/I4	24 V <sub>out of ASi</sub>	I4	0 V <sub>out of ASi</sub>	I3	n.c.
	X4	O3/O4	24 V <sub>ext out</sub>	O4	0 V <sub>ext out</sub>	O3	n.c.
	ADDR (dummy plug)	connection for ASi addressing device					
BWU3032	X1	I1/I2	24 V <sub>ext out</sub>	I2	0 V <sub>ext out</sub>	I1	n.c.
	X2	O1/O2	24 V <sub>ext out</sub>	O2	0 V <sub>ext out</sub>	O1	n.c.
	X3	I3/I4	24 V <sub>ext out</sub>	I4	0 V <sub>ext out</sub>	I3	n.c.
	X4	O3/O4	24 V <sub>ext out</sub>	O4	0 V <sub>ext out</sub>	O3	n.c.
	ADDR (dummy plug)	connection for ASi addressing device					
BWU3375	X1	I1/I2	24 V <sub>out of ASi</sub>	I2	0 V <sub>out of ASi</sub>	I1	n.c.
	X2	O1/O2	24 V <sub>ext out</sub>	O2	0 V <sub>ext out</sub>	O1	n.c.
	X3	I3/I4	24 V <sub>out of ASi</sub>	I4	0 V <sub>out of ASi</sub>	I3	n.c.
	X4	O3	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O3	n.c.
	ADDR (dummy plug)	connection for ASi addressing device					
BWU2547	X1	I1/O1	24 V <sub>ext out</sub>	O1	0 V <sub>ext out</sub>	I1	n.c.
	X2	I2/O2	24 V <sub>ext out</sub>	O2	0 V <sub>ext out</sub>	I2	n.c.
	X3	I3/O3	24 V <sub>ext out</sub>	O3	0 V <sub>ext out</sub>	I3	n.c.
	X4	I4/O4	24 V <sub>ext out</sub>	O4	0 V <sub>ext out</sub>	I4	n.c.
	ADDR (dummy plug)	connection for ASi addressing device					

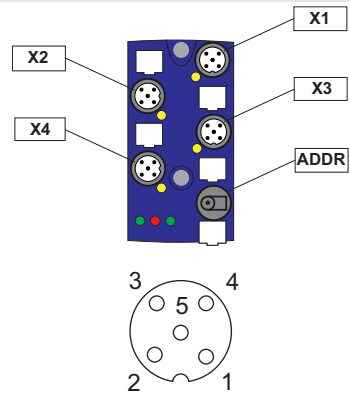

# Digital Modules ASi, IP67, M12




Connections							
Article no.	M12 connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5
BWU3887	X1	I1/O1	24 V <sub>ext out</sub>	I1	0 V <sub>ext out</sub>	O1	n.c.
	X2	I2/O2	24 V <sub>ext out</sub>	I2	0 V <sub>ext out</sub>	O2	n.c.
	X3	I3/O3	24 V <sub>ext out</sub>	I3	0 V <sub>ext out</sub>	O3	n.c.
	X4	I4/O4	24 V <sub>ext out</sub>	I4	0 V <sub>ext out</sub>	O4	n.c.
	ADDR (dummy plug)	connection for ASi addressing device					
BWU2767	X1	I1/O1	24 V <sub>ext out</sub>	O1	0 V <sub>ext out</sub>	I1	n.c.
	X2	I2/O2	24 V <sub>ext out</sub>	O2	0 V <sub>ext out</sub>	I2	n.c.
	X3	I3	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I3	n.c.
	X4	I4	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I4	n.c.
	ADDR (dummy plug)	connection for ASi addressing device					
BWU2594 BWU2713 BWU2728	X1	O1	0 V <sub>ext out</sub>	O2	0 V <sub>ext out</sub>	O1	n.c.
	X2	O2	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O2	n.c.
	X3	O3	0 V <sub>ext out</sub>	O4	0 V <sub>ext out</sub>	O3	n.c.
	X4	O4	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O4	n.c.
	ADDR (dummy plug)	connection for ASi addressing device					
BWU2552	X1	I1	24 V <sub>out of ASi</sub>	I2	0 V <sub>out of ASi</sub>	I1	n.c.
	X2	I2	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I2	n.c.
	X3	I3	24 V <sub>out of ASi</sub>	I4	0 V <sub>out of ASi</sub>	I3	n.c.
	X4	I4	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I4	n.c.
	ADDR (dummy plug)	connection for ASi addressing device					
BWU2620 BWU3556	X1	I1	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I1	n.c.
	X2	I2	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I2	n.c.
	X3	I3	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I3	n.c.
	X4	I4	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I4	n.c.
	ADDR (dummy plug)	connection for ASi addressing device					
BWU3457	X1	I1	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I1	n.c.
	X2	I2	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I2	n.c.
	X3	I3	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I3	n.c.
	X4	I4	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I4	n.c.
	X5	ASi	ASi+	n.c.	ASi-	n.c.	-
BWU2725	X1	I1	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I1	n.c.
	X2	I2	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I2	n.c.
	X3	I3	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I3	n.c.
	X4	I4	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I4	n.c.
	ADDR (dummy plug)	connection for ASi addressing device					
BWU3077	X1	I1	24 V <sub>out of ASi</sub>	I2	0 V <sub>out of ASi</sub>	I1	n.c.
	X2	I2	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I2	n.c.
	X3	I3	24 V <sub>out of ASi</sub>	I4	0 V <sub>out of ASi</sub>	I3	n.c.
	X4	I4	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I4	n.c.
	X5	ASi	ASi+	n.c.	ASi-	n.c.	-

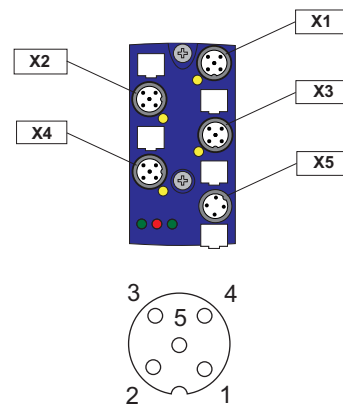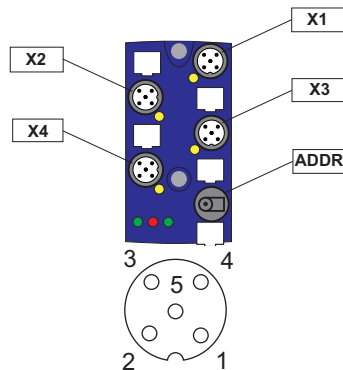


# Digital Modules ASi, IP67, M12



Connections							
Article no.	M12 connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5
BWU3240	X1	I1/O1	24 V <sub>out</sub> of ASi	O1	0 V <sub>out</sub> of ASi	I1	n.c.
	X2	I2/O2	24 V <sub>out</sub> of ASi	O2	0 V <sub>out</sub> of ASi	I2	n.c.
	X3	I3/O3	24 V <sub>out</sub> of ASi	O3	0 V <sub>out</sub> of ASi	I3	n.c.
	X4	I4/O4	24 V <sub>out</sub> of ASi	O4	0 V <sub>out</sub> of ASi	I4	n.c.
	ADDR (dummy plug)	connection for ASi addressing device					
BWU3517	X1	I1	24 V <sub>out</sub> of ASi	n.c.	0 V <sub>out</sub> of ASi	I1	n.c.
	X2	O1	24 V <sub>ext</sub> out	n.c.	0 V <sub>ext</sub> out	O1	n.c.
	X3	I2	24 V <sub>out</sub> of ASi	n.c.	0 V <sub>out</sub> of ASi	I2	n.c.
	X4	O2	24 V <sub>ext</sub> out	n.c.	0 V <sub>ext</sub> out	O2	n.c.
	X5	ASi	ASi+	0 V <sub>ext</sub> in	ASi-	24 V <sub>ext</sub> in	-

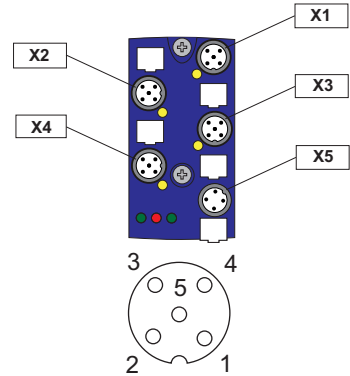


Connections							
Article no.	M12 connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5
BWU2617 BWU2684	X1	I1	24 V <sub>out</sub> of ASi	n.c.	0 V <sub>out</sub> of ASi	I1	n.c.
	X2	I2	24 V <sub>out</sub> of ASi	n.c.	0 V <sub>out</sub> of ASi	I2	n.c.
	X3	I3	24 V <sub>out</sub> of ASi	n.c.	0 V <sub>out</sub> of ASi	I3	n.c.
	X4	I4	24 V <sub>out</sub> of ASi	n.c.	0 V <sub>out</sub> of ASi	I4	n.c.
	X5	O1	0 V <sub>ext</sub> out	n.c.	0 V <sub>ext</sub> out	O1	n.c.
	X6	O2	0 V <sub>ext</sub> out	n.c.	0 V <sub>ext</sub> out	O2	n.c.
	X7	O3	0 V <sub>ext</sub> out	n.c.	0 V <sub>ext</sub> out	O3	n.c.
	X8	O4	0 V <sub>ext</sub> out	n.c.	0 V <sub>ext</sub> out	O4	n.c.
ADDR (dummy plug)	connection for ASi addressing device						
BWU2619	X1	I1/I2	24 V <sub>out</sub> of ASi	I2	0 V <sub>out</sub> of ASi	I1	n.c.
	X2	I3/I4	24 V <sub>out</sub> of ASi	I4	0 V <sub>out</sub> of ASi	I3	n.c.
	X3	I5/I6	24 V <sub>out</sub> of ASi	I6	0 V <sub>out</sub> of ASi	I5	n.c.
	X4	I7/I8	24 V <sub>out</sub> of ASi	I8	0 V <sub>out</sub> of ASi	I7	n.c.
	X5	O1/O2	0 V <sub>ext</sub> out	O2	0 V <sub>ext</sub> out	O1	n.c.
	X6	O3/O4	0 V <sub>ext</sub> out	O4	0 V <sub>ext</sub> out	O3	n.c.
	X7	O5/O6	0 V <sub>ext</sub> out	O6	0 V <sub>ext</sub> out	O5	n.c.
	X8	O7/O8	0 V <sub>ext</sub> out	O8	0 V <sub>ext</sub> out	O7	n.c.
ADDR (dummy plug)	connection for ASi addressing device						
BWU2626 BWU3426	X1	I1	24 V <sub>out</sub> of ASi	I2	0 V <sub>out</sub> of ASi	I1	n.c.
	X2	I2	24 V <sub>out</sub> of ASi	n.c.	0 V <sub>out</sub> of ASi	I2	n.c.
	X3	I3	24 V <sub>out</sub> of ASi	I4	0 V <sub>out</sub> of ASi	I3	n.c.
	X4	I4	24 V <sub>out</sub> of ASi	n.c.	0 V <sub>out</sub> of ASi	I4	n.c.
	X5	O1	0 V <sub>ext</sub> out	O2	0 V <sub>ext</sub> out	O1	n.c.
	X6	O2	0 V <sub>ext</sub> out	n.c.	0 V <sub>ext</sub> out	O2	n.c.
	X7	O3	0 V <sub>ext</sub> out	O4	0 V <sub>ext</sub> out	O3	n.c.
	X8	O4	0 V <sub>ext</sub> out	n.c.	0 V <sub>ext</sub> out	O4	n.c.
ADDR (dummy plug)	connection for ASi addressing device						
BWU3496	X1	I1	24 V <sub>out</sub> of ASi	n.c.	0 V <sub>out</sub> of ASi	I1	n.c.
	X2	I2	24 V <sub>out</sub> of ASi	n.c.	0 V <sub>out</sub> of ASi	I2	n.c.
	X3	I3	24 V <sub>out</sub> of ASi	n.c.	0 V <sub>out</sub> of ASi	I3	n.c.
	X4	I4	24 V <sub>out</sub> of ASi	n.c.	0 V <sub>out</sub> of ASi	I4	n.c.
	X5	O1	0 V <sub>ext</sub> out	n.c.	0 V <sub>ext</sub> out	O1	n.c.
	X6	O2	0 V <sub>ext</sub> out	n.c.	0 V <sub>ext</sub> out	O2	n.c.
	X7	O3	0 V <sub>ext</sub> out	n.c.	0 V <sub>ext</sub> out	O3	n.c.
	X8	not used					
ADDR (dummy plug)	connection for ASi addressing device						

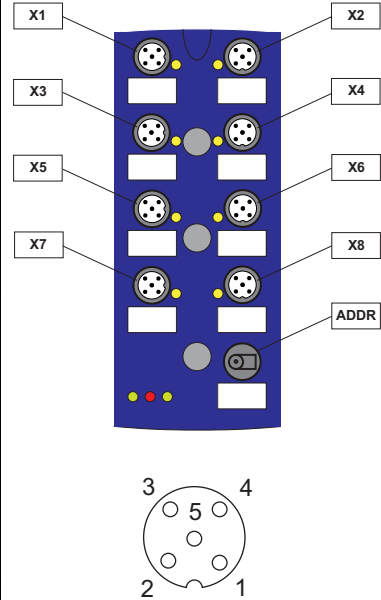

# Digital Modules ASi, IP67, M12




Connections							
Article no.	M12 connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5
BWU3540	X1	I1	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I1	n.c.
	X2	I2	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I2	n.c.
	X3	I3	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I3	n.c.
	X4	I4	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I4	n.c.
	X5	O1	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O1	n.c.
	X6	O2	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O2	n.c.
	X7	O3	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O3	n.c.
	X8	O4	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O4	n.c.
<b>ADDR (dummy plug)</b>	connection for ASi addressing device						
BWU3892	X1	I1/I2	24 V <sub>ext out</sub>	I2	0 V <sub>ext out</sub>	I1	n.c.
	X2	I3/I4	24 V <sub>ext out</sub>	I4	0 V <sub>ext out</sub>	I3	n.c.
	X3	I5/I6	24 V <sub>ext out</sub>	I6	0 V <sub>ext out</sub>	I5	n.c.
	X4	I7/I8	24 V <sub>ext out</sub>	I8	0 V <sub>ext out</sub>	I7	n.c.
	X5	O1/O2	0 V <sub>ext out</sub>	O2	0 V <sub>ext out</sub>	O1	n.c.
	X6	O3/O4	0 V <sub>ext out</sub>	O4	0 V <sub>ext out</sub>	O3	n.c.
	X7	O5/O6	0 V <sub>ext out</sub>	O6	0 V <sub>ext out</sub>	O5	n.c.
	X8	O7/O8	0 V <sub>ext out</sub>	O8	0 V <sub>ext out</sub>	O7	n.c.
<b>ADDR (dummy plug)</b>	connection for ASi addressing device						
BWU2651	X1	I1	24 V <sub>out of ASi</sub>	I2	0 V <sub>out of ASi</sub>	I1	n.c.
	X2	I2	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I2	n.c.
	X3	I3	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I3	n.c.
	X4	I4	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I4	n.c.
	X5	I5	24 V <sub>out of ASi</sub>	I6	0 V <sub>out of ASi</sub>	I5	n.c.
	X6	I6	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I6	n.c.
	X7	I7	24 V <sub>out of ASi</sub>	I8	0 V <sub>out of ASi</sub>	I7	n.c.
	X8	I8	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I8	n.c.
<b>ADDR (dummy plug)</b>	connection for ASi addressing device						
BWU2983	X1	I1	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I1	n.c.
	X2	I2	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I2	n.c.
	X3	I3	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I3	n.c.
	X4	I4	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I4	n.c.
	X5	I5	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I5	n.c.
	X6	I6	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I6	n.c.
	X7	I7	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I7	n.c.
	X8	I8	24 V <sub>out of ASi</sub>	n.c.	0 V <sub>out of ASi</sub>	I8	n.c.
<b>ADDR (dummy plug)</b>	connection for ASi addressing device						
BWU2652	X1	O1	0 V <sub>ext out</sub>	O2	0 V <sub>ext out</sub>	O1	n.c.
	X2	O2	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O2	n.c.
	X3	O3	0 V <sub>ext out</sub>	O4	0 V <sub>ext out</sub>	O3	n.c.
	X4	O4	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O4	n.c.
	X5	O5	0 V <sub>ext out</sub>	O6	0 V <sub>ext out</sub>	O5	n.c.
	X6	O6	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O6	n.c.
	X7	O7	0 V <sub>ext out</sub>	O8	0 V <sub>ext out</sub>	O7	n.c.
	X8	O8	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O8	n.c.
<b>ADDR (dummy plug)</b>	connection for ASi addressing device						
BWU2770	X1	I1	24 V <sub>ext out</sub>	I2	0 V <sub>ext out</sub>	I1	n.c.
	X2	I2	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I2	n.c.
	X3	I3	24 V <sub>ext out</sub>	I4	0 V <sub>ext out</sub>	I3	n.c.
	X4	I4	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I4	n.c.
	X5	I5	24 V <sub>ext out</sub>	I6	0 V <sub>ext out</sub>	I5	n.c.
	X6	I6	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I6	n.c.
	X7	I7	24 V <sub>ext out</sub>	I8	0 V <sub>ext out</sub>	I7	n.c.
	X8	I8	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I8	n.c.
<b>ADDR (dummy plug)</b>	connection for ASi addressing device						

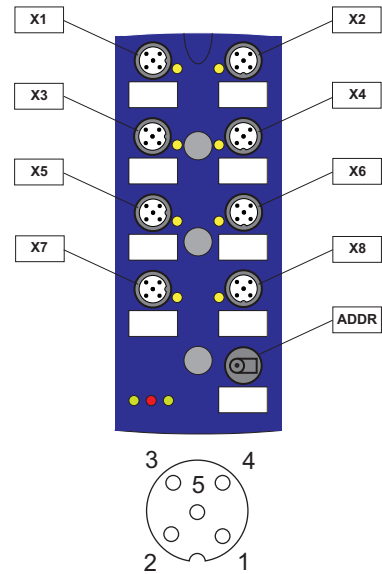

# Digital Modules ASi, IP67, M12



Connections							
Article no.	M12 connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5
BWU2810	X1	I1	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I1	n.c.
	X2	I2	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I2	n.c.
	X3	I3	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I3	n.c.
	X4	I4	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I4	n.c.
	X5	O1	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O1	n.c.
	X6	O2	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O2	n.c.
	X7	O3	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O3	n.c.
	X8	O4	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O4	n.c.
	<b>ADDR (dummy plug)</b>	connection for ASi addressing device					
BWU3510	X1	I1	24 V <sub>ext out</sub>	I2	0 V <sub>ext out</sub>	I1	n.c.
	X2	I2	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I2	n.c.
	X3	I3	24 V <sub>ext out</sub>	I4	0 V <sub>ext out</sub>	I3	n.c.
	X4	I4	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I4	n.c.
	X5	O1	n.c.	O2	0 V <sub>ext out</sub>	O1	n.c.
	X6	O2	n.c.	n.c.	0 V <sub>ext out</sub>	O2	n.c.
	X7	O3	n.c.	O4	0 V <sub>ext out</sub>	O3	n.c.
	X8	O4	n.c.	n.c.	0 V <sub>ext out</sub>	O4	n.c.
	<b>ADDR (dummy plug)</b>	connection for ASi addressing device					


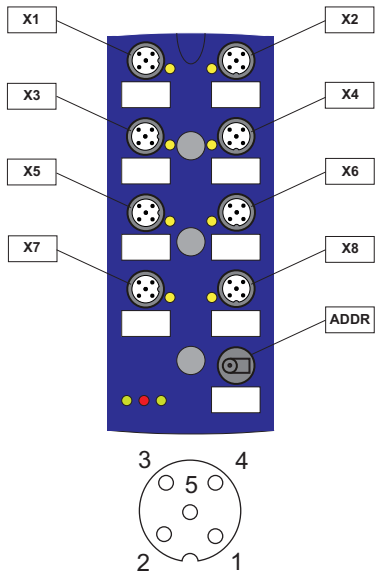


# Digital Modules ASi, IP67, M12






Connections							
Article no.	M12 connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5
BWU2645	X1	I1	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I1	n.c.
	X2	I2	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I2	n.c.
	X3	I3	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I3	n.c.
	X4	I4	24 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	I4	n.c.
	X5	O1	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O1	n.c.
	X6	O2	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O2	n.c.
	X7	O3	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O3	n.c.
	X8	O4	0 V <sub>ext out</sub>	n.c.	0 V <sub>ext out</sub>	O4	n.c.
	X9	ASi	ASi+	0 V <sub>ext in</sub>	ASi-	24 V <sub>ext in</sub>	-

## Mounting according to cable direction

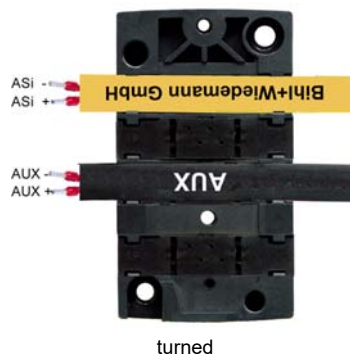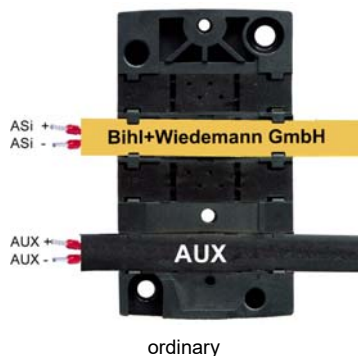

## Line termination with sealing profiles / as junction

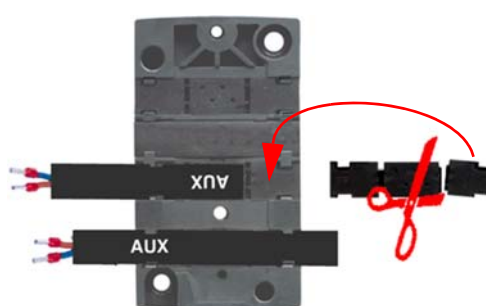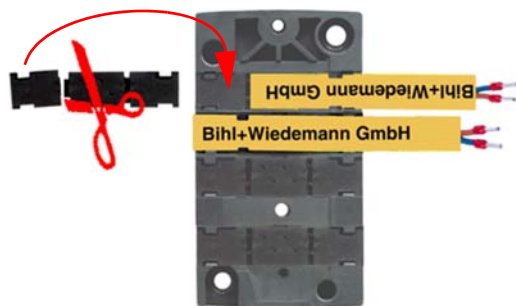

## Accessories:

- ASi substructure module for 4 channel module in 45 mm housing (art. no. BWU2349)
- ASi substructure module (CNOMO) for 4 channel module in 45 mm housing (art. no. BWU2350)
- ASi substructure module (CNOMO) for 8 channel module in 60 mm housing (art. no. BWU2351)
- Protection caps for unused M12 sockets (art. no. BW2368)
- Sealing profile IP67 (IDC plug), 60 mm (art. no. BW3282)
- Sealing profile IP67 (IDC plug), 45 mm (art. no. BW3283)
- Passive Distributor ASi/AUX to 2 x M12 socket, internal protection via changeable 4 A slow-blow fuses (art. no. BWU3087)
- It is recommended to use pre-assembled cables to connect the power source with the module.



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)