

# ASi-3 CC-Link Gateway with integrated Safety Monitor

## ASi-3 CC-Link Gateway with integrated safety monitor

1 Master, CC-Link Slave

Up to 31 release circuits

- up to 6 CAT4, SIL 3 safe output circuits on the Monitor electronic safe outputs

Safe ASi outputs are supported

- up to 31 independent ASi outputs
- Multiple safe ASi outputs possible via a single ASi address

Monitor configuration can be „arbitrarily“ large

- 256 devices
- Identical reaction time due to artificial limitation to 256 devices

Safe speed and standstill monitoring

Applications up to category 4/PLe/SIL 3

Chip card for storage of configuration data



(Figure similar)



Figure	Type	Inputs safety, expandable to	Outputs Safety, SIL 3, cat. 4	Safety outputs, independent according to SIL 3, expandable to	Safety communication	Number of ASi networks, number of ASi Master <sup>(1)</sup>	1 power supply, 1 gateway for 2 ASi networks, inexpensive power supplies <sup>(2)</sup>	Diagnostic and configuration interface <sup>(3)</sup>	Article no.
	Safety CC-Link	max. 31 x 2 channels, max. 1891 in max configuration	6 release circuits; 6 x electronic safe outputs	max. 31, max. 991 in max. configuration	Safe Link	1 ASi network, 1 ASi master	yes, max. 4A/ ASi network	Ethernet diagnostic	<b>BWU2833</b>

(1) **Number of ASi networks, number of ASi Master: Safety devices:**

"Single Master": 1 ASi network, 1 ASi Master.

(2) **1 power supply, 1 gateway for 2 ASi networks, inexpensive power supplies:**

"yes, max. 4A/ASi network": Cost-effective power for 2 ASi networks with 1 power supply (optionally supply of multiple Single Gateways by 1 power supply).

(3) **Diagnostic and configuration interface**

"Ethernet diagnostic": Access to ASi master and safety monitor via Bihl+Wiedemann proprietary software over Ethernet diagnostics interface.

The latest version of the device description file of the gateway is available in the "Downloads" section of the respective device.

## ASi-3 CC-Link Gateway with integrated Safety Monitor

<b>Article no.</b>	<b>BWU2833</b>
<b>Interface</b>	
CC-Link interface	according CC-Link specification
Baud rates	156 Kbps up to 10 MBps
Card slot	chip card for storage of configuration data
<b>CC-Link</b>	
Functions	imaging of the ASi slaves as RW data on CC-Link. complete diagnosis and configuration via CC-Link
Type	remote device
Occupied stations	2-4 (depending on operating mode)
<b>ASi</b>	
ASi specification	3.0
Cycle time	150 $\mu$ s * (number of slaves + 2)
Operating voltage	30 V <sub>DC</sub> (20 ... 31,6 V) (PELV voltage)
ASi Power24V capability <sup>(1)</sup>	yes
<b>AUX</b>	
Operating voltage	24 V <sub>DC</sub> (19,2 ... 28,8 V)
Max current consumption	7,2 A
<b>Display</b>	
LCD	indication of slave addresses and error messages in plain text
LED power (green)	power on
LED cc-link (green)	CC-Link communication active
LED config error (red)	configuration error
LED U ASi (green)	ASi voltage OK
LED ASi active (green)	ASi normal operation active
LED prg enable (green)	automatic addresses programming enabled
LED prj mode (yellow)	configuration mode active
LED AUX (green)	auxiliary power
LEDs SI1 ... SI6 (yellow)	state of inputs: off: open on: closed
LEDs SO1 ... SO6 (yellow)	state of outputs: off: open on: closed
<b>UL-specifications (UL508)</b>	
External protection	An isolated source with a secondary open circuit voltage of $\leq 30$ V <sub>DC</sub> with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.
Applied standards	EN 60529 EN 61000-6-2 EN 61000-6-4 EN 62061, SIL 3 EN 61508, SIL 3 EN ISO 13849-1, performance-level e
<b>Ambient</b>	
Operating altitude	max. 2000 m
Ambient temperature	0 °C ... +55 °C
Storage temperature	-25 °C ... +85 °C
Housing	stainless steel, for DIN rail mounting
Protection category	IP20
Maximum tolerable shock and vibration stress	according EN 61131-2
Voltage of insulation	$\geq 500$ V
Weight	800 g
Dimensions (W / H / D in mm)	100 / 120 / 106

# ASi-3 CC-Link Gateway with integrated Safety Monitor

**(1) ASi Power24V**

The device can be operated directly on a 24 V (PELV) power supply. The gateway has been optimized with integrated data coupling coils and adjustable self-resetting fuses for safe use of powerful 24 V power supplies.

<b>Article no.</b>	<b>BWU2833</b>
<b>Safety Monitor</b>	
Start delay	< 10 ms
Max. turn-off time	< 40 ms
Antivalent switches for local inputs	yes
Standstill monitors for local inputs	6 axes up to 50 Hz <sup>(1)</sup>
Speed monitors for local inputs	3 to 6 axes up to 400 Hz <sup>(2)</sup>
<b>Connection</b>	
Connection	COMBICON
Length of connector cable	unlimited <sup>(3)</sup>
<b>Input</b>	
Inputs Safety, SIL3, cat. 4	3 x 2 channels <sup>(4)</sup>
Inputs digital, EDM	up to 6 standard inputs <sup>(4)</sup>
Switching current	15 mA (T = 100 µs), continuously 4 mA at 24 V
Power supply	out of AUX
<b>Output</b>	
Number of release circuits on the monitor	6
Outputs	semiconductor output max. contact load: 1,2 A <sub>DC-13</sub> at 30 V, Σ = 7,2 A in sum <sup>(5)</sup>
Power supply (semiconductor outputs)	out of AUX


(1) connection at all SI or SO terminals possible.

(2) connection only at terminals SO1 ... SO6 configured as standard inputs (see "Variations of terminal configuration for BWU2833")

(3) loop resistance ≤ 150 Ω

(4) see "Variations of terminal configuration for BWU2833"

(5)

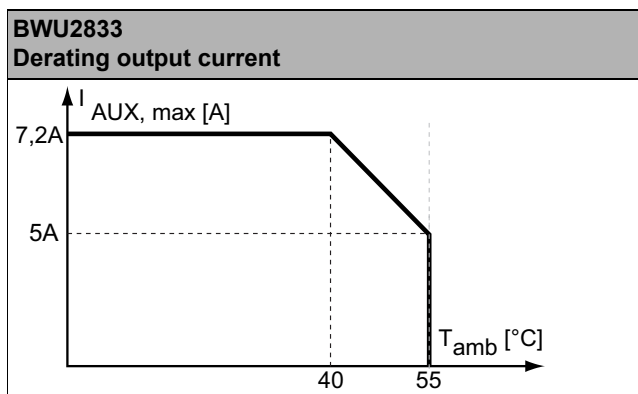

Article no.	Operating current		
	Master power supply, ca. 300mA out of ASi circuits	Master power supply, max. 300mA out of ASi circuit 1 (approx. 70mA ... 300mA), max. 300mA out of ASi circuit 2 (approx. 70mA ... 300mA); in sum max. 370mA	Version „1 gateway, 1 power supply, for 2 ASi networks“, approx. 300mA (PELV voltage)
<b>BWU2833</b>	-	-	•


# ASi-3 CC-Link Gateway with integrated Safety Monitor



	BWU2833
Redundant power supply out of ASi: all fundamental functions of the device remain available even in case of power failure in one of the two ASi networks	–
Current measurement of the ASi circuits	•
Self-resetting adjustable fuses	•
ASi earth fault monitor distinguishes between ASi cable and sensor cable	•
In version „1 gateway, 1 power supply for 2 ASi circuits“: only 1 gateway + 1 ASi power supply is needed for both 2 ASi circuits	•

## Safety outputs block diagram

### BWU2833

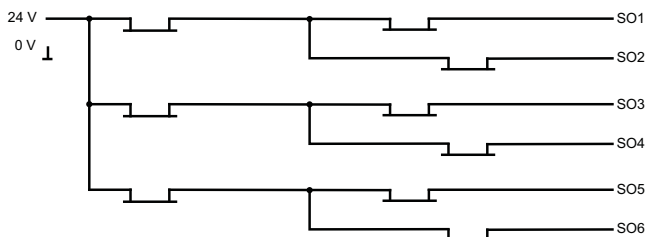

## Variations of terminal configuration for BWU2833

Terminal	Safe output	Safe input for mechanical contacts in combination with T1, T2 <sup>(1)</sup>	Safe antivalent input <sup>(1)</sup>	Safe electronic input <sup>(1)</sup>	Standard input <sup>(1)</sup>
SI1,2	–	•	•	•	•
SI3,4	–	•	•	•	•
SI5,6	–	•	•	•	•
SO1,2 <sup>(2)</sup>	•	•	•	–	•
SO3,4 <sup>(2)</sup>	•	•	•	–	•
SO5,6 <sup>(2)</sup>	•	•	•	–	•

<sup>(1)</sup> Inputs may only be supplied by the same 24 V source as the device itself.

<sup>(2)</sup> If outputs are configured as inputs, the input current has to be limited by an external element at ≤ 100mA

# ASi-3 CC-Link Gateway with integrated Safety Monitor

## Connections: Gateway + Safety Monitor

BWU2833	Connection	Description	
	SI1, SI3, SI5	Safe input terminal (T1)	
	SI2, SI4, SI6	Safe input terminal (T2)	
	T1	Clock output 1	
	T2	Clock output 2	
	SO1 ... SO6	Safe semiconductor outputs 1 ... 6	
	24V, 0V	Power supply for local I/Os	
	+ASI 1-	Connection of ASi circuit	
	ASI +PWR-	Power supply for Gateway and ASi networks	

## Connections: CC-Link

Signal	Color
1 DA	blue
2 DB	white
3 DG	yellow
4 SLD	n/a
5 F G	n/a

## Accessories:

- Safe contact expander, 1 or 2 independent channels (art. no. BWU2548 / BWU2539)
- Bihl+Wiedemann Suite - Safety Software for Configuration, Diagnostics and Commissioning (art. no. BW2916)
- Power supplies, e.g.: ASi power supply, 4 A (art. no. BW1649), ASi power supply, 8 A (art. no. BW1997)  
(further power supply units can be found at [www.bihl-wiedemann.de/en/products/accessories/power-supplies](http://www.bihl-wiedemann.de/en/products/accessories/power-supplies))



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)