

## Control & Monitoring Relays

### Single Phase Current Relay MXC-10



#### DESCRIPTION

A relay for monitoring AC or DC Current via an internal shunt. The relay is delivered in two variations for over- or under-current.

**Over-current:**

When the monitored current rises and reaches the determined setpoint, which is adjusted on the front panel, the relay energises. When the current drops and passes the setpoint, minus the hysteresis which is adjustable on the front, the relay de-energises.

**Under-current:**

When the monitored current drops and reaches the determined setpoint, which is adjusted on the front panel, the relay energises. When the current rises and passes the setpoint, plus the hysteresis which is adjustable on the front, the relay de-energises.

There is also a latch function where the relay after energising will remain energised, regardless of input current, until the latch jumper or the operating voltage is disconnected. Typically used in safety circuits. The contact function of the relay can also be inverted.

The relay has an analogue, 2-10V DC, output which when connected to an external voltmeter can be used for the accurate adjustment of setpoint.

#### Features


- Monitoring of 4mA - 2A AC/DC, in 5 ranges, in one version.
- Adjustable setpoint.
- Adjustable hysteresis 0,5-20%.
- Automatic locking function (Latch).
- Inversion of the relay function.
- Output SPDT and 2-10V DC referenced to the setpoint.
- Operating voltage 24VDC , 24/115VAC or 24/230VAC.

#### VERSIONS/ORDERING CODES


<b>Type:</b> Single phase current relay	MXC-10	MXC-10.	230.	1
<b>Supply voltage</b> 24V DC 115V AC / 24V AC 230V AC / 24V AC		924	115	230
<b>Over/under current</b> Over current Under current		1	2	

#### OPERATION


##### Over current, code 1

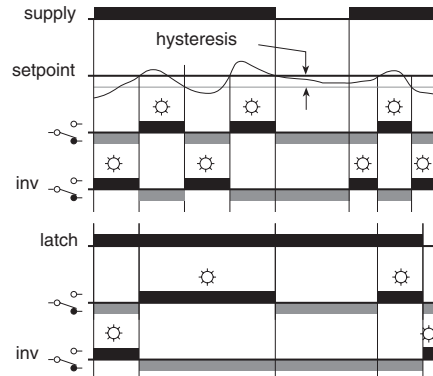

##### Under current, code 2

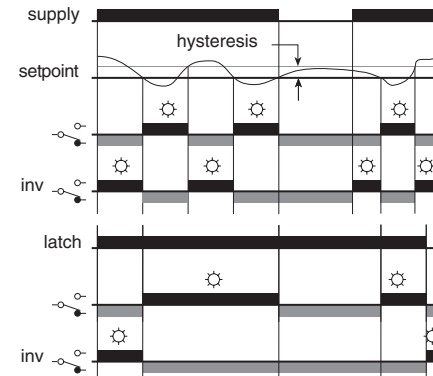

#### MECHANICAL DIMENSIONS

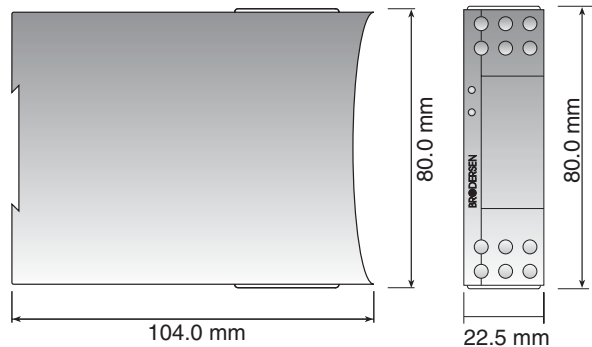

**TECHNICAL DATA**

**Input:**

Input signal:	$I_{max}$	Impedance $R_i$ :	Terminals:			
4-20mA AC/DC;				340mA	50ohm	Y1/Y2
10-50mA AC/DC;						
40-200mA AC/DC;						
100-500mA AC/DC;	5A	0,1ohm	Y1/Y3			
0,4-2A AC/DC;						

Frequency:	45-65 Hz.
Temperature drift:	Max. 0,05%/°C.
Setting accuracy:	Typically ± 10%.
Hysteresis:	0,5-20% of chosen range, adjustable
Response time:	time constant $\tau = 0,8s$ , Worst case of response time max. $5 \times \tau$ .

**Output:**

SPDT relay:	Contact material, AgNi 0,15 with hardened gold plating Au. Max load AC, 8A/240V AC ( $\cos\phi=1$ ) Max. breaking capacity 2000VA. Inductive load. See fig. 1. Max load DC, 8A/24V DC Max. breaking capacity 50-270W, See fig.2.
-------------	---

Max. in rush current:	15A (max. 4s/duty cycle less than 10%).
Min. in rush current:	10mA, 24V DC.
Frequency :	Max.1000 operations pr.hour.
Life time:	Mech. Min. $3 \times 10^7$ operations. Elect. Min $1 \times 10^5$ operations with full load.

Delay: <20ms.

**Analogue output:**

2-10V DC, refers to setpoint in chosen range.

$I_{max} = 2mA / R_{load} > 5k\Omega$ .  
Accuracy better than ± 0,5%.

**Supply voltage:**


Versions:	924=24V DC (20,4-27,6)V DC. 115=24/115V AC (20,4-27,6/98-132)V AC. 230=24/230V AC (20,4-27,6/196-264)V AC.
Net frequency:	45-65Hz.

Consumption:	AC; 3VA. DC; 2W.
--------------	---------------------

**General data:**

Ambient temperature:	-20 to 55°C.
Storage temperature:	-40 to 80°C.
Mounting:	35mm DIN-rail (EN50022).
Terminals:	Screw terminals with dual compartment. Terminal screws are combined crosshead/slotted. Up to $2 \times 2,5mm^2$ wire ( $2 \times 1,5mm^2$ inc. ferrule). Recommended torque, 0,5 Nm., Max 0,7 Nm. (VDE0609-1). Terminal identification in accordance with DIN46199/EN50005.
Indicators:	Green LED = working voltage. Red LED = relay switched on.
Protection:	IP20.
Electrical isolation:	3,75kVAC (1 min.) between input, supply and relay output (EN60950). <b>Note:</b> No galvanic isolation between input and analogue output.
Housing:	Noryl (GE), UL94V1.
Terminal block:	Noryl (GE), UL94V0.
Weight:	180 g.

**WIRING DIAGRAM**



<b>Input:</b>	<b>Terminals:</b>
4-20mA	Y1/Y2
10-50mA	
40-200mA	Y1/Y3
100-500mA	
0,4-2A	

**Coding:**  
Relay inverter. Jumper Y1-Z1

Latching, Jumper Y1-Z2

**Analogue output 2-10V DC;**  
X1 = (+) V  
Y1 = (-) 0

**SPECIFICATIONS:**

- MXC-10 is designed and developed with regard to relevant specifications:
- EN60204-1 / VDE0113 electrical material on machines.
  - VDE0110 / IEC664 Isolation specifications/creepage and clearance distances.
  - Electrical safety in accordance with EN61010.
  - IEC414 Safety regulations for control and monitoring equipment.
  - EMC: Emission EN50081-1.  
Immunity EN50082-2.
  - Humidity in accordance with IEC68-2-3; RH=95%, 40°C
  - Vibration in accordance with IEC68-2-6:
  - Shock when mounted, in accordance with IEC68-2-27.

MXC-10 is CE-marked in accordance with EMC- and the Low Voltage Directive.

**OUTPUT LOAD DIAGRAMS**

Fig.1





Fig. 2



INTRO... MCP-10 MCU-10 DV/AV MCU-10 DC/AC MCU-10 P/N/T MCU-10 J/K/S/R MCU-10 U MXV-10 MXV-20 MXC-10 MXC-20 MXC-30 MXV-30 MXP-10 MXP-20 MXL-10 MXT-10



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)