




# Digital Modules ASi in IP20, 22,5 mm



Cost efficient solution in IP20




(Figure similar)

Figure	Type	Housing	Primary application <sup>(1)</sup>	Inputs digital	Outputs digital	Input voltage (sensor supply) <sup>(2)</sup>	Output voltage (actuator supply) <sup>(3)</sup>	ASi connection <sup>(4)</sup>	ASi address <sup>(5)</sup>	Article No.
	IP20, 22,5 mm x 50 mm, 4 x COMBICON	4 x COMBICON	decentralized control cabinet	4	4 x electronic	out of ASi	out of ASi	clamps	1 AB address	<b>BWU2783</b>
	IP20, 22,5 mm x 50 mm, 4 x COMBICON	4 x COMBICON	decentralized control cabinet	4	4 x electronic	out of ASi	out of ASi	clamps	1 single address	<b>BWU3272</b>
	IP20, 22,5 mm x 50 mm, 4 x COMBICON	3 x COMBICON	decentralized control cabinet	4	–	out of ASi	–	clamps	1 AB address (S-0.A.7.0)	<b>BWU3747</b>
	IP20, 22,5 mm x 92 mm 4 x COMBICON	4 x COMBICON	control cabinet	4	4 x electronic	out of AUX	out of AUX	clamps	1 AB address	<b>BWU3559</b>
	IP20, 22,5 mm x 92 mm 4 x COMBICON	4 x COMBICON	control cabinet	4	4 x electronic	out of AUX	out of AUX	clamps	1 AB address	<b>BWU3842</b>
	IP20, 22,5 mm x 92 mm 4 x COMBICON	4 x COMBICON	control cabinet	4	3 x electronic	out of AUX	out of AUX	clamps	1 AB address	<b>BWU3733</b>
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	3 x COMBICON	control cabinet	4	–	out of AUX	–	clamps	1 AB address	<b>BWU2723</b>
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	4 x COMBICON	control cabinet	4	4 x electronic	out of AUX	out of AUX	clamps	1 AB address	<b>BWU1938</b>
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	4 x COMBICON	control cabinet	4	4 x electronic	out of AUX	out of AUX	clamps	1 single address	<b>BWU2759</b>
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	4 x COMBICON	control cabinet	8	–	out of AUX	–	clamps	2 AB addresses	<b>BWU2721</b>
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	4 x COMBICON	decentralized control cabinet	4	–	out of ASi	–	clamps	1 AB address	<b>BWU3265</b>
	IP20, 22,5 mm x 114 mm, 4 x COMBICON	4 x COMBICON	decentralized control cabinet	4	–	out of AUX	–	clamps	1 AB address	<b>BWU3266</b>

# Digital Modules ASi in IP20, 22,5 mm



Figure	Type	Housing	Primary application <sup>(1)</sup>	Inputs digital	Outputs digital	Input voltage (sensor supply) <sup>(2)</sup>	Output voltage (actuator supply) <sup>(3)</sup>	ASi connection <sup>(4)</sup>	ASi address <sup>(5)</sup>	Article No.
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	4	3 x relay	out of ASi	–	clamps	1 AB address	<b>BWU3878</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	4	4 x relay	out of ASi	–	clamps	1 single address	<b>BWU3435</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	4	4 x relay	out of ASi	–	clamps	1 single address (S-7.0.F.E)	<b>BWU3658</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	4	4 x relay	out of ASi	–	clamps	1 AB address	<b>BWU3549</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	8	8 x electronic	out of ASi	out of AUX	clamps	2 AB addresses	<b>BWU3364</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	8	8 x electronic	out of AUX	out of AUX	clamps	2 AB addresses	<b>BWU2490</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	8	8 x electronic	out of AUX	out of AUX	clamps	2 single addresses	<b>BWU2800</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	control cabinet	8 (NPN)	8 x electronic (NPN)	out of AUX	out of AUX	clamps	2 AB addresses	<b>BWU3359</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	decentralized control cabinet	4	4 x electronic	out of ASi	out of AUX	clamps	1 AB address	<b>BWU3267</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	decentralized control cabinet	4	4 x electronic	out of AUX	out of AUX	clamps	1 AB address	<b>BWU3268</b>
	IP20, 22,5 mm x 114 mm, 6 x COMBICON	6 x COMBICON	decentralized control cabinet	4	4 x electronic	out of ASi	out of AUX	clamps	1 single address	<b>BWU3754</b>

**(1) Primary Application**

**Control cabinet:** Cost-optimized modules whereby the supply voltage for the sensors and actuators is connected via additional patch terminals. Optimal application in the main control cabinet.

**Decentralized control cabinet:** Ideal for use in decentralized control cabinets. 3-wire sensors or actuators can be connected directly to terminals in the module without additional patch terminals or the module has an extremely flat design.

**(2) Input voltage (sensor supply):** inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.

**(3) Output voltage (actuator supply):** outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential

**(4) ASi connection:** the connection to ASi as well to AUX (auxiliary 24 V power) is made via yellow resp. black ASi profile cable with piercing technology or via M12 socket (in IP20 via clamps).

**(5) ASi address:** 1 AB address (max. 62 AB addresses/ASi network), 2 AB addresses (max. 31 modules with 2 AB addresses), Single addresses (max. 31 Single addresses/ASi network), mixed use allowed. For modules with two ASi nodes the 2nd ASi node is turned off as long as the 1st ASi node is addressed to address "0". Upon request, ASi nodes are available with specific ASi node profiles.

# Digital Modules ASi in IP20, 22,5 mm




Article no.	BWU3272		BWU2783	BWU3747
<b>General data</b>				
Device type	input / output			input
<b>Connection</b>				
ASi / AUX connection	COMBICON plug			
Periphery connection	COMBICON plug			
Primary application	decentralized control cabinet			
Length of connector cable	I/O: max. 15 m <sup>(1)</sup>			
<b>ASi</b>				
Profile	S-7.0.E, ID1=F (default)	S-7.A.7, ID1=7 (fixed)	S-0.A.0, ID1=7 (default)	
Address	1 single address	1 AB address		
Required Master profile	≥M0	≥M4	≥M3	
Since ASi specification	2	3.0	2.1	
Operating voltage	30 V (18 ... 31.6 V)			
Max. current consumption	165 mA			
Max. current consumption without sensor/ actuator supply	45 mA			
<b>Input</b>				
Number	4			
Power supply	out of ASi			
Sensor supply	short-circuit and overload protected according to EN 61131-2			
Power supply of attached sensors	up to +40 °C	120 mA, ∑ (In/Out) 120 mA <sup>(2)</sup>		120 mA, ∑ (In) 120 mA <sup>(5)</sup>
	at +55 °C	20 mA, ∑ (In/Out) 20 mA <sup>(2)</sup>		20 mA, ∑ (In) 20 mA <sup>(5)</sup>
Switching threshold	U<5 V (low) U>15 V (high)			
<b>Output</b>				
Number	4 x electronic			–
Power supply	out of ASi			–
Actuator supply	short-circuit and overload protected according to EN 61131			–
Max. output current	up to +40 °C	120 mA per output, ∑ (In/Out) 120 mA <sup>(2)</sup>		–
	at +55 °C	20 mA, ∑ (In/Out) 20 mA <sup>(2)</sup>		–
<b>Display</b>				
LED ASI (green)	an: ASi voltage on, flashing: ASi voltage on, but peripheral fault <sup>(3)</sup> or address 0 off: no ASi Voltage			
LED FLT/FAULT (red)	an: address 0 or offline flashing: peripheral fault <sup>(3)</sup> off: online			
LEDs I1 ... In (yellow)	state of inputs I1 ... I4			
LEDs O1 ... On (yellow)	state of outputs O1 ... O4			–

# Digital Modules ASi in IP20, 22,5 mm




Article no.	BWU3272	BWU2783	BWU3747
<b>Environment</b>			
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131 EN 60529		
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes <sup>(4)</sup>		
Operating altitude	max. 2000 m		
Ambient temperature	-25 °C ... +40 °C (up to max. +55 °C) <sup>(2)</sup> no condensation permitted		
Storage temperature	-25 °C ... +85 °C		
Housing	plastic, for DIN rail mounting		
Pollution Degree	2		
Protection category	IP20		
Tolerable loading referring to humidity	according to EN 61131-2		
Voltage of insulation	≥500 V		
Weight	65 g		
Dimensions (W / H / D in mm)	22,5 / 99 / 50,5		

(1) Loop resistance ≤150 Ω

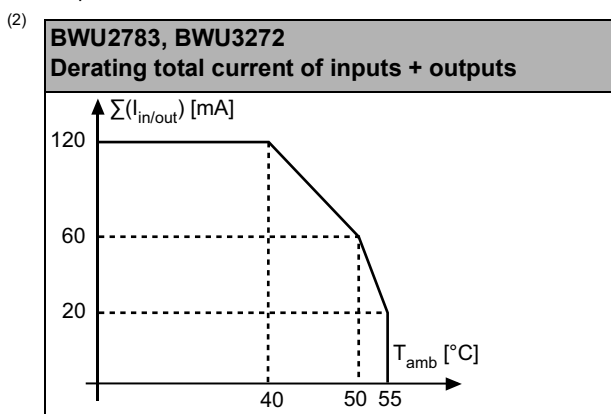

(3) see table „Peripheral fault indication“

(4) The module is suitable for use in passively safe paths as it has no connection to an AUX potential.

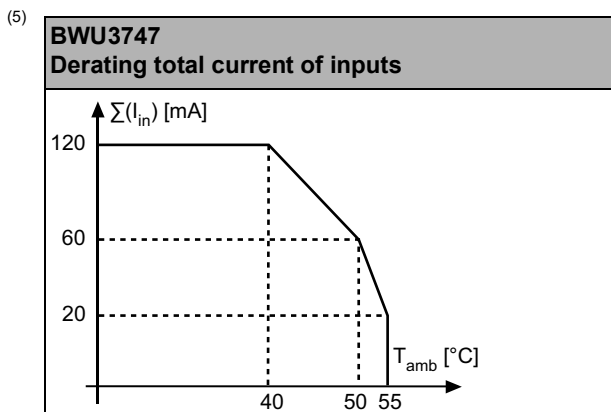

# Digital Modules ASi in IP20, 22,5 mm




Article no.	BWU3265	BWU3266	BWU3268	BWU3267	BWU3754
<b>General data</b>					
Device type	input		input / output		
<b>Connection</b>					
ASi / AUX Connection	COMBICON plug				
Periphery connection	COMBICON plug				
Primary application	decentralized control cabinet				
Length of connector cable	I/O: unlimited <sup>(1)</sup>				
<b>ASi</b>					
Profile	S-7.A.E, ID1=7 (default)		S-7.A.7, ID1=7 (fixed)		S-7.0.E, ID1=F (default)
Address	1 AB address				1 single address
Required Master profile	≥M3		≥M4		≥M0
Since ASi specification	2.1		3.0		2
Operating voltage	30 V (18 ... 31.6 V)				
Max. current consumption	165 mA	35 mA		165 mA	
Max. current consumption without sensor/ actuator supply	45 mA	35 mA		45 mA	
<b>AUX</b>					
Voltage	–	24 V (18 ... 30 V)			
Max. current consumption	–	1,2 A	4,2 A	3 A	
<b>Input</b>					
Number	4				
Power supply	out of ASi	out of AUX		out of ASi	
Sensor supply	short-circuit and overload protected according to EN 61131-2				
power supply of attached sensors	up to +40 °C	120 mA <sup>(2)</sup>	1200 mA permanent operation <sup>(6)</sup>		120 mA <sup>(2)</sup>
	at +55 °C	90 mA <sup>(2)</sup>	900 mA permanent operation <sup>(6)</sup>		90 mA <sup>(2)</sup>
	at +70 °C	60 mA <sup>(2)</sup>	600 mA permanent operation <sup>(6)</sup>		60 mA <sup>(2)</sup>
Switching threshold	U < 5 V (low) U > 15 V (high)				
<b>Output</b>					
Number	–		4 x electronic		
Power supply	–		out of AUX		
Actuator supply	short-circuit and overload protected according to EN 61131-2				
Max. output current	up to +50 °C	–		1 A per output, $\sum$ (Out) 3,0 A <sup>(8)</sup>	
	at +55 °C	–		1 A per output, $\sum$ (Out) 2,5 A <sup>(8)</sup>	
	at +70 °C	–		1 A per output, $\sum$ (Out) 1,0 A <sup>(8)</sup>	
<b>Display</b>					
LED ASi (green)	an: ASi voltage on, flashing: ASi voltage on, but peripheral fault <sup>(3)</sup> or address 0 off: no ASi Voltage				
LED FLT/FAULT (red)	an: address 0 or offline flashing: peripheral fault <sup>(3)</sup> off: online				
LEDs I1 ... I4 (yellow)	state of inputs I1 ... I4				
LEDs O1 ... O4 (yellow)	–		state of outputs O1 ... O4		
LED AUX (green)	–		on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX		

# Digital Modules ASi in IP20, 22,5 mm



Article no.	BWU3265	BWU3266	BWU3268	BWU3267	BWU3754
<b>Environment</b>					
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131 EN 60529				
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes <sup>(4)</sup>	yes <sup>(7)</sup>			
Operating altitude	max. 2000 m				
Ambient temperature	-25 °C ... +55 °C (up to max. +70 °C) <sup>(2) (5)</sup>	-25 °C ... +55 °C (up to max. +70 °C) <sup>(5) (6) (8)</sup>		-25 °C ... +55 °C (up to max. +70 °C) <sup>(2) (5) (8)</sup>	
	no condensation permitted				
Storage temperature	-25 °C ... +85 °C <sup>(2) (3)</sup>				
Housing	plastic, for DIN rail mounting				
Pollution Degree	2				
Protection category	IP20				
Tolerable loading referring to humidity	according to EN 61131-2				
Voltage of insulation	≥500 V				
Weight	120 g				
Dimensions (W / H / D in mm)	22,5 / 99 / 114				


(1) Loop resistance ≤150 Ω

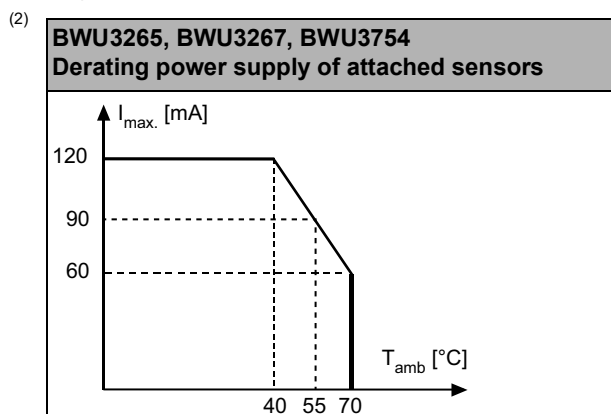

(3) see table „peripheral fault indication“

(4) The module is suitable for use in passively safe paths as it has no connection to an AUX potential.

(5) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada.

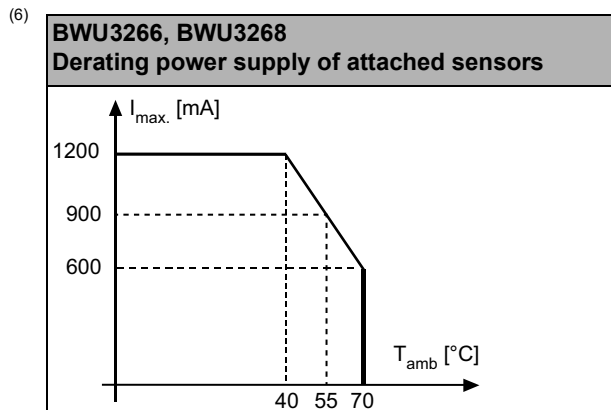


(7) BWU3266 from Ident. No. 18368; BWU3268 from Ident. No. 17368; BWU3267 from Ident. No. 17051; BWU3754 from Ident. No. 17355; The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

# Digital Modules ASi in IP20, 22,5 mm



(8)

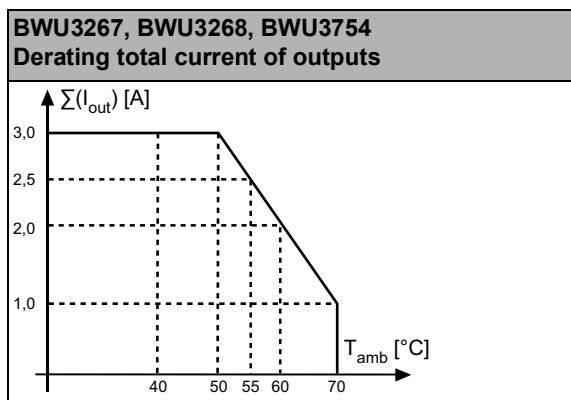

Article no.	BWU2723	BWU3842	BWU1938	BWU3559	BWU3733	BWU2759
<b>General data</b>						
Device type	input		inputs / output			
<b>Connection</b>						
ASi / AUX Connection	COMBICON plug					
Periphery connection	COMBICON plug					
Primary application	control cabinet					
Length of connector cable	I/O: unlimited <sup>(1)</sup>					
<b>ASi</b>						
Profile	S-7.A.E, ID1=7 (default)		S-7.A.7, ID1=7 (fixed)		S-7.A.0, ID1=7 (default)	S-7.0.E, ID1=F (default)
Address	1 AB address					1 single address
Required Master profile	≥M3		≥M4		≥M3	≥M0
Since ASi specification	2.1		3.0		2.1	2
Operating voltage	30 V (18 ... 31.6 V)					
Max. current consumption	35 mA					
Max. current consumption without sensor/ actuator supply	35 mA					
<b>AUX</b>						
Voltage	24 V (18 ... 30 V)					
Max. current consumption	1,2 A	8 A	4 A			
<b>Input</b>						
Number	4					
Power supply	out of AUX					
Sensor supply	short-circuit and overload protected according to EN 61131					
power supply of attached sensors	up to +40 °C	1200 mA permanent operation <sup>(2)</sup>	< 500 mA	1200 mA permanent operation <sup>(2)</sup>		
	at +55 °C	900 mA permanent operation <sup>(2)</sup>		900 mA permanent operation <sup>(2)</sup>		
	at +70 °C	600 mA permanent operation <sup>(2)</sup>		600 mA permanent operation <sup>(2)</sup>		
Switching threshold	U<5 V (low) U>15 V (high)					

# Digital Modules ASi in IP20, 22,5 mm




Article no.	BWU2723	BWU3842	BWU1938	BWU3559	BWU3733	BWU2759
<b>Output</b>						
Number	–	4 x electronic			3 x electronic	4 x electronic
Power supply	–	out of AUX				
Actuator supply	short-circuit and overload protected according to EN 61131					
Max. output current	up to +50 °C	–	2 A per output, $\sum$ (In/Out) 8 A <sup>(6)</sup>	1 A per output, $\sum$ (Out) 3,0 A <sup>(7)</sup>		
	at +55 °C		2 A per output, $\sum$ (In/Out) 4 A <sup>(6)</sup>	1 A per output, $\sum$ (Out) 2,5 A <sup>(7)</sup>		
	at +70 °C		2 A per output, $\sum$ (In/Out) 2 A <sup>(6)</sup>	1 A per output, $\sum$ (Out) 1,0 A <sup>(7)</sup>		
<b>Display</b>						
LED ASI (green)	an: ASi voltage on, flashing: ASi voltage on, but peripheral fault <sup>(3)</sup> or address 0 off: no ASi Voltage					
LED FLT/FAULT (red)	an: address 0 or offline flashing: peripheral fault <sup>(3)</sup> off: online					
LEDs I1 ... In (yellow)	state of inputs I1 ... I4					
LEDs O1 ... On (yellow)	–	state of outputs O1 ... O4				
LED AUX (green)	on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX					
<b>Environment</b>						
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131 EN 60529					
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes <sup>(4)</sup>			no <sup>(8)</sup>		yes <sup>(9)</sup>
Operating altitude	max. 2000 m					
Ambient temperature	-25 °C ... +55 °C C (up to max. +70 °C) <sup>(2) (5)</sup>	-25 °C ... +55 °C (up to max. +70 °C) <sup>(2) (5) (6) (7)</sup>				
		no condensation permitted				
Storage temperature	-25 °C ... +85 °C					
Housing	plastic, for DIN rail mounting					
Pollution Degree	2					
Protection category	IP20					
Tolerable loading referring to humidity	according to EN 61131-2					
Voltage of insulation	≥500 V					
Weight	120 g					
Dimensions (W / H / D in mm)	22,5 / 99 / 114	22,5 / 99 / 92	22,5 / 99 / 114	22,5 / 99 / 92		22,5 / 99 / 114

(1) Loop resistance ≤150 Ω

## Digital Modules ASi in IP20, 22,5 mm

(2) **BWU1938, BWU2723, BWU2759, BWU3559, BWU3733**  
Derating power supply of attached sensors

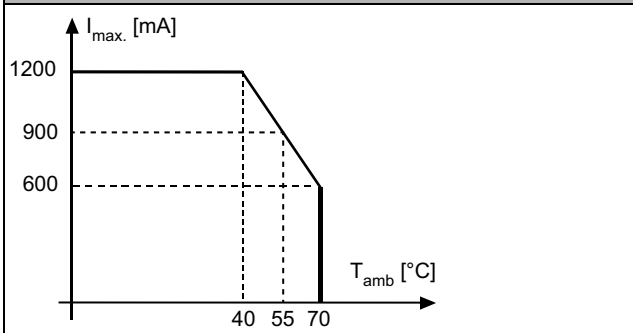


(3) see table „peripheral fault indication“


(4) BWU2723 from Ident. No. 18206; BWU3842 from Ident. No. 18488; BWU1938 from Ident. No. 18430; BWU3559 from Ident. No. 18507; the module is suitable for use in passively safe paths because an exclusion of errors can be assumed for the connection of the two potentials, ASi and AUX.

(5) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada.

(6) **BWU3842**  
Derating total current of outputs

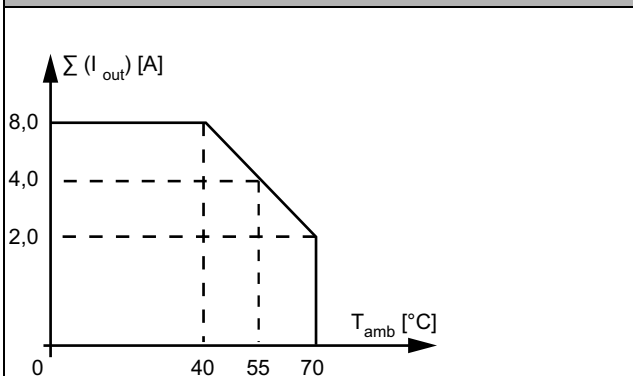

(7) **BWU1938, BWU2759, BWU3559, BWU3733**  
Derating total current of outputs

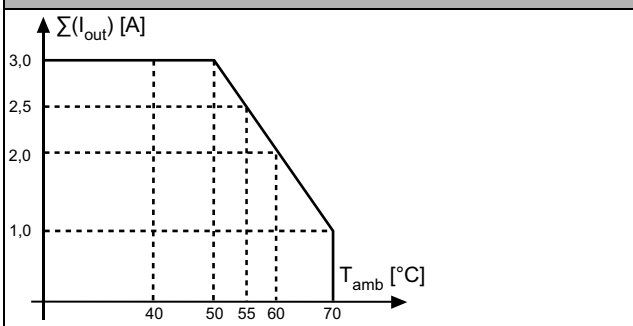

(8) The module is not suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors cannot be assumed for the connection of the two ASi and AUX potentials.

If the module is supplied from an unswitched AUX cable, this has no influence on the safety consideration for the paths with passively safe-switched AUX cable. In an ASi circuit, paths supplied from a passively safe-switched AUX cable and paths supplied from unswitched AUX potential can be used together.

(9) BWU2759 from Ident. No. 18506; The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

# Digital Modules ASi in IP20, 22,5 mm



Article no.	BWU3364	BWU2490	BWU2800	BWU2721	BWU3359
<b>General data</b>					
Device type	input / output			input	input / output
<b>Connection</b>					
ASi / AUX connection	COMBICON plug				
Periphery connection	COMBICON plug				
Primary application	control cabinet				
Length of connector cable	I/O: unlimited <sup>(1)</sup>				
<b>ASi</b>					
Profile	ASi node 1: S-7.A.7, ID1=7 (fixed), ASi node 2: S-7.A.7, ID1=6 (default)	ASi node 1: S-7.0.E, ID1=F (default) ASi node 2: S-7.0.E, ID1=E (default)	ASi node 1: S-7.A.E, ID1=7 (default) ASi node 2: S-7.A.E, ID1=6 (default)	ASi node 1: S-7.A.7, ID1=7 (fixed), ASi node 2: S-7.A.7, ID1=6 (default)	
Address	2 AB addresses		2 single addresses	2 AB addresses	
Required Master profile	≥M4		≥M0	≥M3	≥M4
Since ASi specification	3.0		2.0	2.1	3.0
Operating voltage	30 V (18 ... 31.6 V)				
Max. current consumption	320 mA	60 mA			
Max. current consumption without sensor/ actuator supply	60 mA	60 mA			
<b>AUX</b>					
Voltage	24 V (18 ... 30 V)				
Max. current consumption	8 A			1,2 A	8 A
<b>Input</b>					
Number	8				8 (NPN)
Power supply	out of ASi	out of AUX			
Sensor supply	short-circuit and overload protected according to EN 61131				
Power supply of attached sensors	up to +40 °C	260 mA <sup>(2)</sup>	900 mA permanent operation <sup>(6)</sup>	1200 mA permanent operation <sup>(10)</sup>	
	at +55 °C	130 mA <sup>(2)</sup>	700 mA permanent operation <sup>(6)</sup>	900 mA permanent operation <sup>(10)</sup>	
	at +70 °C	–	600 mA permanent operation <sup>(6)</sup>	600 mA permanent operation <sup>(10)</sup>	
Switching threshold	U<5 V (low) U>15 V (high)				ground I+ -U<5 V (low) -U>15 V (high)
<b>Output</b>					
Number	8 x electronic			–	8 x electronic (NPN)
Power supply	out of AUX			–	out of AUX
Actuator supply	short-circuit and overload protected according to EN 61131				
Max. output current	up to +40 °C	1 A per output, $\sum (O1 \dots O4) 3 A +$ $\sum (O5 \dots O8) 3 A$ 3 A <sup>(3)</sup>	1 A per output, $\sum (O1 \dots O4) 3 A +$ $\sum (O5 \dots O8) 3 A$ <sup>(7)</sup>	–	0,5 A per output, $\sum (Out) 4 A$ <sup>(11)</sup>
	at +55 °C	1 A per output, $\sum (O1 \dots O4) 2 A +$ $\sum (O5 \dots O8) 2 A$ 2 A <sup>(3)</sup>			
	at +70 °C	–	1 A per output, $\sum (O1 \dots O8) 1 A$ <sup>(7)</sup>		


# Digital Modules ASi in IP20, 22,5 mm




Article no.	BWU3364	BWU2490	BWU2800	BWU2721	BWU3359	
<b>Display</b>						
LED ASI/FLT 1 (red/green)	green: online red: offline yellow/red flashing: address 0					
LED ASI/FLT 2 (red/green)	green: online red: offline yellow/red flashing: address 0 red/green flashing: peripheral fault <sup>(4)</sup> red flashing: ASi node 2 is switched off, because ASi node 1 is offline					
LEDs I1 ... I8 (yellow)	state of inputs I1 ... I8					
LEDs O1 ... O8 (yellow)	state of outputs O1 ... O8			-	state of outputs O1 ... O8	
LED AUX (green)	on: 24 V <sub>DC</sub> AUX off: no 24 V <sub>DC</sub> AUX					
<b>Environment</b>						
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131 EN 60529					
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes <sup>(5)</sup>			no <sup>(12)</sup>		
Operating altitude	max. 2000 m					
Ambient temperature	30 °C ... +55 °C <sup>(2) (3)</sup>	-30 °C ... +55 °C (up to max. +70 °C) <sup>(6) (7) (8) (9)</sup>		-30 °C ... +55 °C (up to max. +70 °C) <sup>(8) (10) (11)</sup>		
no condensation permitted						
Storage temperature	-25 °C ... +85 °C					
Housing	plastic, for DIN rail mounting					
Pollution Degree	2					
Protection category	IP20					
Tolerable loading referring to humidity	according to EN 61131-2					
Voltage of insulation	≥500 V					
Weight	120 g					
Dimensions (W / H / D in mm)	22,5 / 99 / 114					

(1) Loop resistance ≤150 Ω

(2)


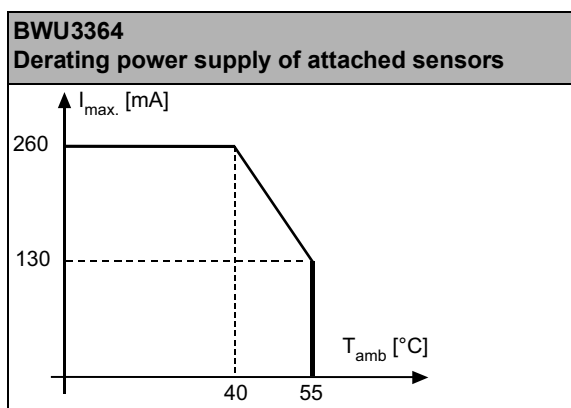


## Digital Modules ASi in IP20, 22,5 mm

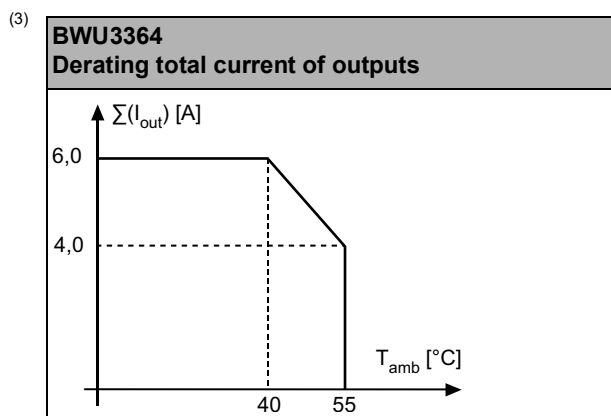

(4) see table „peripheral fault indication“



(5) BWU3364 from Ident. No. 18441; BWU2490 from Ident. No. 18307; BWU2800 from Ident. No. 18544; BWU2721 from Ident. No. 18264; The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

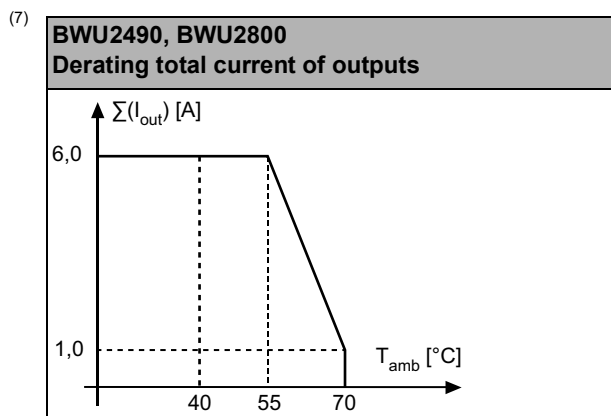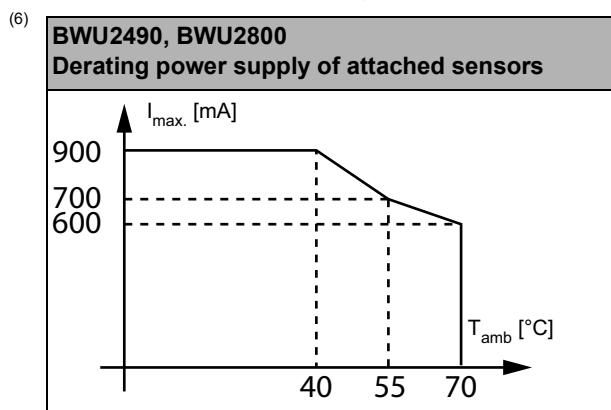

(8) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada.

(9) Temperature range up to -30°C from Ident.No. ≥16283 (BWU2490); Ident.No. ≥16299 (BWU2800).

# Digital Modules ASi in IP20, 22,5 mm

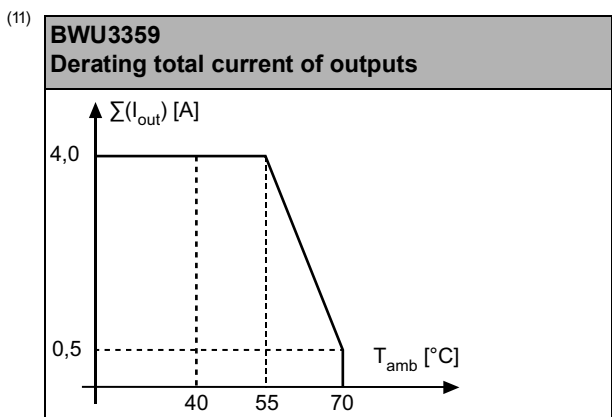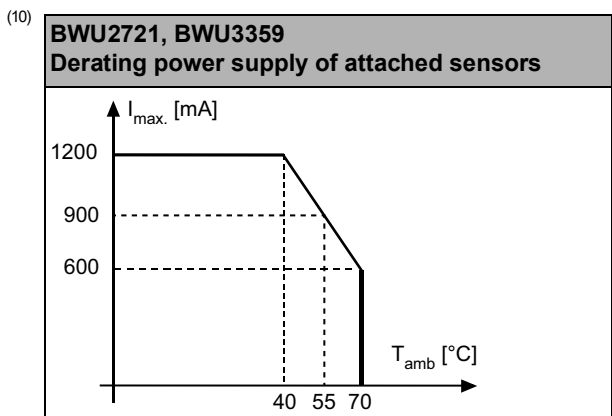

(12) The module is not suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors cannot be assumed for the connection of the two ASi and AUX potentials.  
 If the module is supplied from an unswitched AUX cable, this has no influence on the safety consideration for the paths with passively safe-switched AUX cable. In an ASi circuit, paths supplied from a passively safe-switched AUX cable and paths supplied from unswitched AUX potential can be used together.


Article no.	BWU3878	BWU3435	BWU3658	BWU3549
<b>General data</b>				
Device type	input / output			
<b>Connection</b>				
ASi / AUX Connection	COMBICON plug			
Periphery connection	COMBICON plug			
Primary application	control cabinet			
Length of connector cable	I/O: unlimited <sup>(1)</sup>			
<b>ASi</b>				
Profile	S-7.A.7.0	S-7.F.E, ID1=F (default)	S-7.0.E, ID1=F (default)	S-7.A.7, ID=7(fixed)
Address	1 AB address	1 single address		1 AB address
Required Master profile	≥M0			≥M4
Since ASi specification	2			3
Operating voltage	30 V (26,5 ... 31.6 V)			
Max. current consumption	200 mA			165 mA
Max. current consumption without sensor/ actuator supply	45 mA			
<b>Input</b>				
Number	4			
Power supply	out of ASi			
Sensor supply	short-circuit and overload protected according to EN 61131			
Power supply of attached sensors	up to +40 °C	120 mA <sup>(2)</sup>		120 mA <sup>(6)</sup>
	at +55 °C	90 mA <sup>(2)</sup>		90 mA <sup>(6)</sup>
	at +70 °C	60 mA <sup>(2)</sup>		60 mA <sup>(6)</sup>

# Digital Modules ASi in IP20, 22,5 mm



Article no.	BWU3878	BWU3435	BWU3658	BWU3549
Switching threshold	U<5 V (low) U>15 V (high)			
<b>Output</b>				
Number	3 x relay outputs, normally open, 230 VAC/2A/AC-14, 30 VDC/2A/DC-13 $\Sigma$ (Out) 8 A	4 x relay outputs, normally open, 230 VAC/2A/AC-14, 30 VDC/2A/DC-13 $\Sigma$ (Out) 8 A		
Relay control	out of ASi			
Max. output current	-			
<b>Display</b>				
LED ASI (green)	an: ASi voltage on, flashing: ASi voltage on, but peripheral fault <sup>(3)</sup> or address 0 off: no ASi Voltage			
LED FLT/FAULT (red)	an: address 0 or offline flashing: peripheral fault <sup>(3)</sup> off: online			
LEDs I1 ... In (yellow)	state of inputs I1 ... I4			
LEDs O1 ... On (yellow)	state of outputs O1 ... O3	state of outputs O1 ... O4		
<b>Environment</b>				
Applied standards	EN 61000-6-2 EN 61000-6-3 EN 61131 EN 60529			
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes <sup>(4)</sup>			
Operating altitude	max. 2000 m			
Ambient temperature	-25 °C ... +55 °C (up to max. +70 °C) <sup>(2)</sup> <sup>(5)</sup>		-25 °C ... +55 °C (up to max. +70 °C) <sup>(5)</sup> <sup>(6)</sup>	
	no condensation permitted			
Storage temperature	-25 °C ... +85 °C			
Housing	plastic, for DIN rail mounting			
Pollution Degree	2			
Protection category	IP20			
Tolerable loading referring to humidity	according to EN 61131-2			
Voltage of insulation	≥500 V			
Weight	120 g			
Dimensions (W / H / D in mm)	22,5 / 99 / 114			

(1) Loop resistance ≤150 Ω

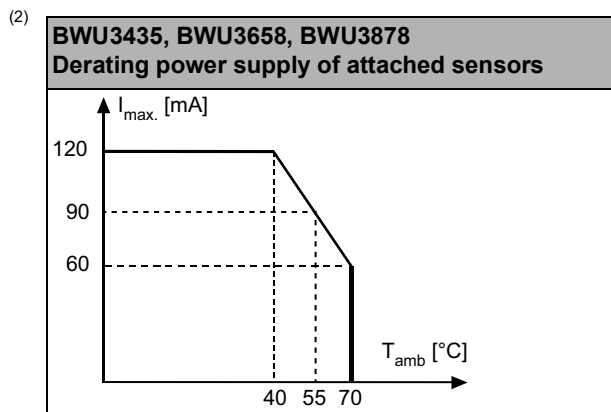

(3) see table "Peripheral fault indication"

(4) The module is suitable for use in passively safe paths as it has no connection to an AUX potential.

# Digital Modules ASi in IP20, 22,5 mm



(5) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada.

BWU3549, Ident.No. ≥ 16906 Derating power supply of attached sensors	BWU3549, Ident.No. <16906 Derating power supply of attached sensors
<p>Up to +40 °C: 20 mA At ≥ +55 °C: 0 mA</p>	

## Wiring rules

Push-in terminals	
<b>General</b>	
Nominal cross section	2.5 mm <sup>2</sup>
<b>Conductor cross section</b>	
Conductor cross section solid	0.2 ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 ... 2.5 mm <sup>2</sup>
Conductor cross section flexible, with ferrule	without plastic sleeve: 0.2 ... 2.5 mm <sup>2</sup>
	with plastic sleeve: 0.25 ... 2.5 mm <sup>2</sup>
2 conductors with same cross section, stranded, with TWIN ferrules	without plastic sleeve: 0.5 ... 1.5 mm <sup>2</sup>
AWG	24 ... 14
Stripped insulation length	10 mm

<b>UL-specifications (UL508)</b>	
External protection	An isolated source with a secondary open circuit voltage of ≤30 V <sub>DC</sub> with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.

Article no.	Peripheral fault indication	
	Overload sensor supply	AUX voltage missing
BWU1938	-	•
BWU2490	-	•
BWU2721	-	•
BWU2723	-	•
BWU2759	-	•
BWU2783	•	-
BWU2800	-	•
BWU3265	•	-
BWU3266	•	•
BWU3267	•	•
BWU3268	•	•
BWU3272	•	-

# Digital Modules ASi in IP20, 22,5 mm



Article no.	Peripheral fault indication	
	Overload sensor supply	AUX voltage missing
BWU3359	–	•
BWU3364	•	•
BWU3435	•	–
BWU3549	•	–
BWU3559	–	•
BWU3658	•	–
BWU3733	–	•
BWU3747	•	–
BWU3754	•	•
BWU3842	–	•
BWU3878	•	–

Programming	Bit setting			
	D3	D2	D1	D0
	input			
BWU1938 / BWU2723 / BWU2759 / BWU2783 / BWU3265 / BWU3266 / BWU3267 / BWU3268 / BWU3272 / BWU3435 / BWU3549 / BWU3559 / BWU3658 / BWU3733 / BWU3747 / BWU3754 / BWU3842 / BWU3878	I4	I3	I2	I1
BWU2490 / BWU2721 / BWU2800 / BWU3359 / BWU3364	ASi node 1: I4 ASi node 2: I8	ASi node 1: I3 ASi node 2: I7	ASi node 1: I2 ASi node 2: I6	ASi node 1: I1 ASi node 2: I5
	output			
BWU1938 / BWU2759 / BWU2783 / BWU3267 / BWU3268 / BWU3272 / BWU3435 / BWU3549 / BWU3559 / BWU3658 / BWU3754 / BWU3842	O4	O3	O2	O1
BWU3733, BWU3878	–	O3	O2	O1
BWU2490 / BWU2800 / BWU3359 / BWU3364	ASi node 1: O4 ASi node 2: O8	ASi node 1: O3 ASi node 2: O7	ASi node 1: O2 ASi node 2: O6	ASi node 1: O1 ASi node 2: O5

Programming	Bit setting			
	parameter bit			
	P3	P2	P1	P0
BWU3364 / BWU2723 / BWU2721 / BWU3265 / BWU3266				0 = off / 1 = on (peripheral fault, if AUX voltage missing)
BWU1938 / BWU2759 / BWU2783 / BWU3267 / BWU3268 / BWU3272 / BWU3435 / BWU3549 / BWU3559 / BWU3658 / BWU3733 / BWU3754 / BWU3842 / BWU3878	not used	0 = on / 1 = off (synchronous I/O mode)	0 = on / 1 = off (data input filter 128 µs)	0 = off / 1 = on (watchdog)
BWU2490 / BWU2800 / BWU3359 / BWU3747				not used, watchdog always on

# Digital Modules ASi in IP20, 22,5 mm



## Connections

Name	Explanation
I <sub>x</sub>	digital input x
O <sub>x</sub>	digital output x
O <sub>x3</sub> , O <sub>x4</sub>	relay output x
I <sub>+</sub> , I <sub>-</sub> , I <sub>+n</sub> , I <sub>-n</sub>	sensor supply
O <sub>-n</sub>	GND for outputs (PNP)
O <sub>+n</sub>	GND for outputs (NPN)
AUX + <sub>ext.in</sub>	power supply, out of external voltage, positive pole (AUX, actuator supply)
AUX - <sub>ext.in</sub>	power supply, out of external voltage, negative pole (AUX, actuator supply)
ASi +, ASi -	connection to ASi bus
ADDR	connection for ASi addressing device
n.c. (not connected)	not connected


Connections		
<b>BWU3265</b> 	<b>BWU3266</b> 	<b>BWU2723</b> 
<b>BWU2783 / BWU3272</b> 	<b>BWU1938 / BWU2759 / BWU3559 / BWU3842</b> 	<b>BWU2721</b> 

# Digital Modules ASI in IP20, 22,5 mm






Connections																																																																						
<p><b>BWU3267 / BWU3268</b></p> <p> <table border="1" style="font-size: small;"> <tr><td>I-1</td><td>I-2</td><td>I-3</td><td>I-4</td></tr> <tr><td>I4</td><td>I3</td><td>I2</td><td>I1</td></tr> <tr><td>I+1</td><td>I+2</td><td>I+3</td><td>I+4</td></tr> </table>   <table border="1" style="font-size: small;"> <tr><td>O1</td><td>O2</td><td>O3</td><td>O4</td></tr> <tr><td>ASI+</td><td>ASI-</td><td>AUX+ ext.in</td><td>AUX- ext.in</td></tr> </table> </p>	I-1	I-2	I-3	I-4	I4	I3	I2	I1	I+1	I+2	I+3	I+4	O1	O2	O3	O4	ASI+	ASI-	AUX+ ext.in	AUX- ext.in	<p><b>BWU2490 / BWU2800 / BWU3364</b></p> <p> <table border="1" style="font-size: small;"> <tr><td>I-</td><td>I+</td><td>O-2</td><td>O-1</td></tr> <tr><td>I8</td><td>I7</td><td>I6</td><td>I5</td></tr> <tr><td>I4</td><td>I3</td><td>I2</td><td>I1</td></tr> </table>   <table border="1" style="font-size: small;"> <tr><td>O1</td><td>O2</td><td>O3</td><td>O4</td></tr> <tr><td>O5</td><td>O6</td><td>O7</td><td>O8</td></tr> <tr><td>ASI+</td><td>ASI-</td><td>AUX+ ext.in</td><td>AUX- ext.in</td></tr> </table> </p>	I-	I+	O-2	O-1	I8	I7	I6	I5	I4	I3	I2	I1	O1	O2	O3	O4	O5	O6	O7	O8	ASI+	ASI-	AUX+ ext.in	AUX- ext.in	<p><b>BWU3359</b></p> <p> <table border="1" style="font-size: small;"> <tr><td>I-</td><td>I+</td><td>O+2</td><td>O+1</td></tr> <tr><td>I8</td><td>I7</td><td>I6</td><td>I5</td></tr> <tr><td>I4</td><td>I3</td><td>I2</td><td>I1</td></tr> </table>   <table border="1" style="font-size: small;"> <tr><td>O1</td><td>O2</td><td>O3</td><td>O4</td></tr> <tr><td>O5</td><td>O6</td><td>O7</td><td>O8</td></tr> <tr><td>ASI+</td><td>ASI-</td><td>AUX+ ext.in</td><td>AUX- ext.in</td></tr> </table> </p>	I-	I+	O+2	O+1	I8	I7	I6	I5	I4	I3	I2	I1	O1	O2	O3	O4	O5	O6	O7	O8	ASI+	ASI-	AUX+ ext.in	AUX- ext.in
I-1	I-2	I-3	I-4																																																																			
I4	I3	I2	I1																																																																			
I+1	I+2	I+3	I+4																																																																			
O1	O2	O3	O4																																																																			
ASI+	ASI-	AUX+ ext.in	AUX- ext.in																																																																			
I-	I+	O-2	O-1																																																																			
I8	I7	I6	I5																																																																			
I4	I3	I2	I1																																																																			
O1	O2	O3	O4																																																																			
O5	O6	O7	O8																																																																			
ASI+	ASI-	AUX+ ext.in	AUX- ext.in																																																																			
I-	I+	O+2	O+1																																																																			
I8	I7	I6	I5																																																																			
I4	I3	I2	I1																																																																			
O1	O2	O3	O4																																																																			
O5	O6	O7	O8																																																																			
ASI+	ASI-	AUX+ ext.in	AUX- ext.in																																																																			
<p><b>BWU3733</b></p> <p> <table border="1" style="font-size: small;"> <tr><td>I-</td><td>I+</td><td>O-2</td><td>O-1</td></tr> <tr><td>I4</td><td>I3</td><td>I2</td><td>I1</td></tr> </table>   <table border="1" style="font-size: small;"> <tr><td>O1</td><td>O2</td><td>O3</td><td>n.c.</td></tr> <tr><td>ASI+</td><td>ASI-</td><td>AUX+ ext.in</td><td>AUX- ext.in</td></tr> </table> </p>	I-	I+	O-2	O-1	I4	I3	I2	I1	O1	O2	O3	n.c.	ASI+	ASI-	AUX+ ext.in	AUX- ext.in	<p><b>BWU3747</b></p> <p> <table border="1" style="font-size: small;"> <tr><td>I-</td><td>I+</td><td>I-2</td><td>I-1</td></tr> <tr><td>I4</td><td>I3</td><td>I2</td><td>I1</td></tr> </table>   <table border="1" style="font-size: small;"> <tr><td>ASI+</td><td>ASI-</td><td>n.c.</td><td>n.c.</td></tr> </table> </p>	I-	I+	I-2	I-1	I4	I3	I2	I1	ASI+	ASI-	n.c.	n.c.																																									
I-	I+	O-2	O-1																																																																			
I4	I3	I2	I1																																																																			
O1	O2	O3	n.c.																																																																			
ASI+	ASI-	AUX+ ext.in	AUX- ext.in																																																																			
I-	I+	I-2	I-1																																																																			
I4	I3	I2	I1																																																																			
ASI+	ASI-	n.c.	n.c.																																																																			
<p><b>BWU3435</b></p> <p> <table border="1" style="font-size: small;"> <tr><td>O44</td><td>O43</td><td>O34</td><td>O33</td></tr> <tr><td>O24</td><td>O23</td><td>O14</td><td>O13</td></tr> </table>   <table border="1" style="font-size: small;"> <tr><td>I+1</td><td>I-1</td><td>I+2</td><td>I-2</td></tr> <tr><td>I1</td><td>I2</td><td>I3</td><td>I4</td></tr> <tr><td>ASI+</td><td>ASI-</td><td>n.c.</td><td>n.c.</td></tr> </table> </p>	O44	O43	O34	O33	O24	O23	O14	O13	I+1	I-1	I+2	I-2	I1	I2	I3	I4	ASI+	ASI-	n.c.	n.c.	<p><b>BWU3549</b></p> <p> <table border="1" style="font-size: small;"> <tr><td>O44</td><td>O43</td><td>O34</td><td>O33</td></tr> <tr><td>O24</td><td>O23</td><td>O14</td><td>O13</td></tr> </table>   <table border="1" style="font-size: small;"> <tr><td>I+1</td><td>I-1</td><td>I+2</td><td>I-2</td></tr> <tr><td>I1</td><td>I2</td><td>I3</td><td>I4</td></tr> <tr><td>ASI+</td><td>ASI-</td><td>n.c.</td><td>n.c.</td></tr> </table> </p>	O44	O43	O34	O33	O24	O23	O14	O13	I+1	I-1	I+2	I-2	I1	I2	I3	I4	ASI+	ASI-	n.c.	n.c.	<p><b>BWU3658</b></p> <p> <table border="1" style="font-size: small;"> <tr><td>O44</td><td>O43</td><td>O34</td><td>O33</td></tr> <tr><td>O24</td><td>O23</td><td>O14</td><td>O13</td></tr> </table>   <table border="1" style="font-size: small;"> <tr><td>I+1</td><td>I-1</td><td>I+2</td><td>I-2</td></tr> <tr><td>I1</td><td>I2</td><td>I3</td><td>I4</td></tr> <tr><td>ASI+</td><td>ASI-</td><td>n.c.</td><td>n.c.</td></tr> </table> </p>	O44	O43	O34	O33	O24	O23	O14	O13	I+1	I-1	I+2	I-2	I1	I2	I3	I4	ASI+	ASI-	n.c.	n.c.								
O44	O43	O34	O33																																																																			
O24	O23	O14	O13																																																																			
I+1	I-1	I+2	I-2																																																																			
I1	I2	I3	I4																																																																			
ASI+	ASI-	n.c.	n.c.																																																																			
O44	O43	O34	O33																																																																			
O24	O23	O14	O13																																																																			
I+1	I-1	I+2	I-2																																																																			
I1	I2	I3	I4																																																																			
ASI+	ASI-	n.c.	n.c.																																																																			
O44	O43	O34	O33																																																																			
O24	O23	O14	O13																																																																			
I+1	I-1	I+2	I-2																																																																			
I1	I2	I3	I4																																																																			
ASI+	ASI-	n.c.	n.c.																																																																			

# Digital Modules ASi in IP20, 22,5 mm

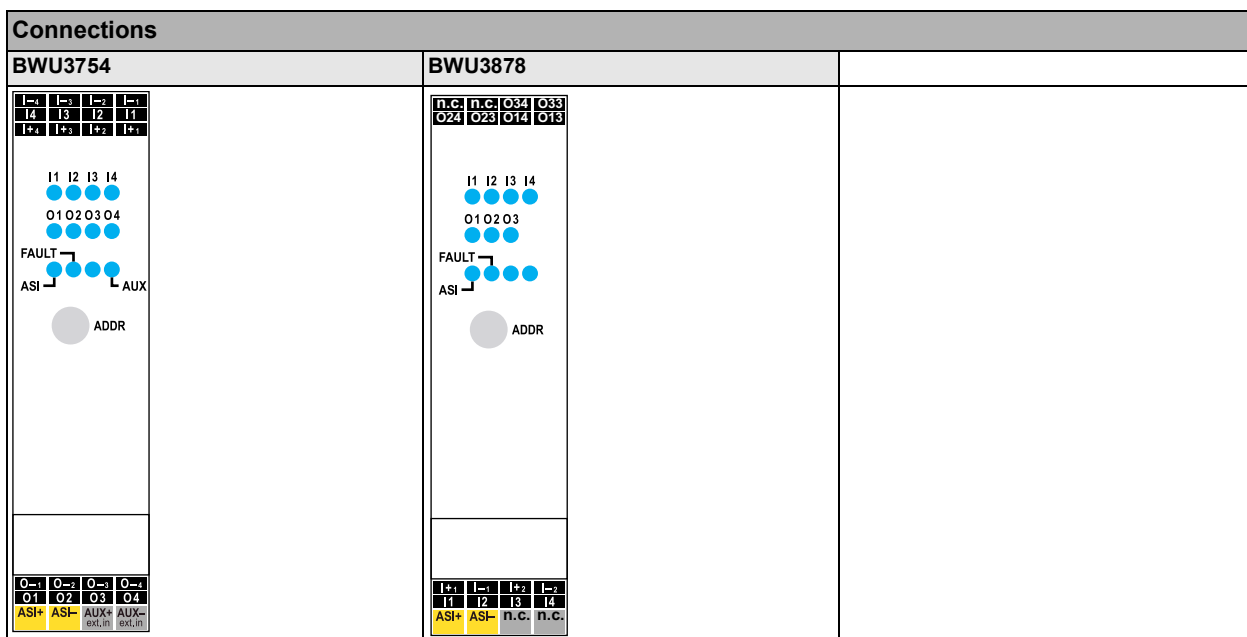




## Power supply PNP

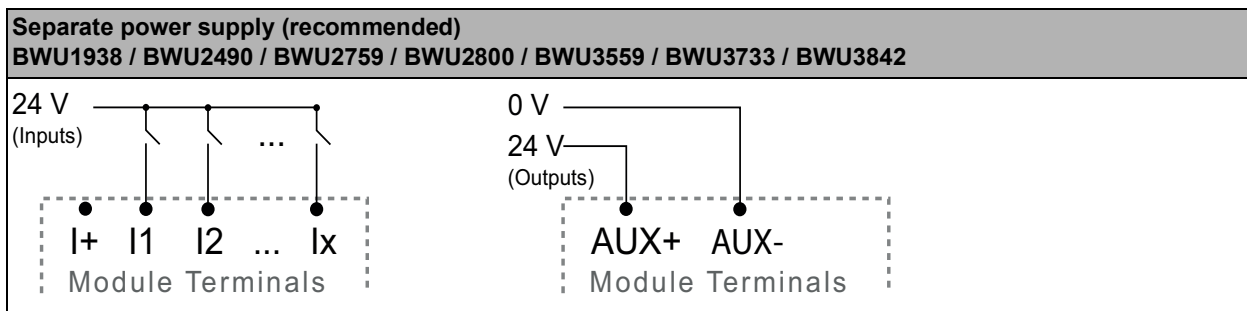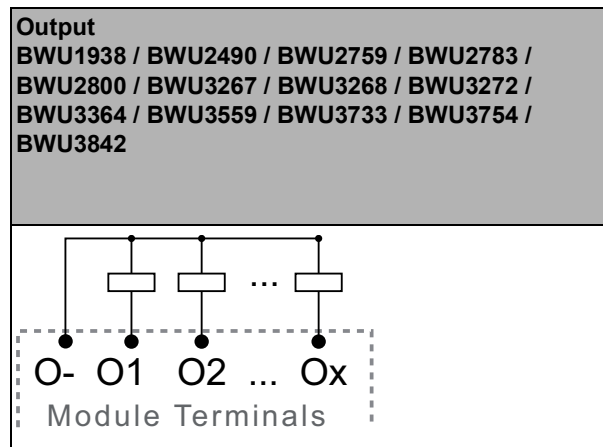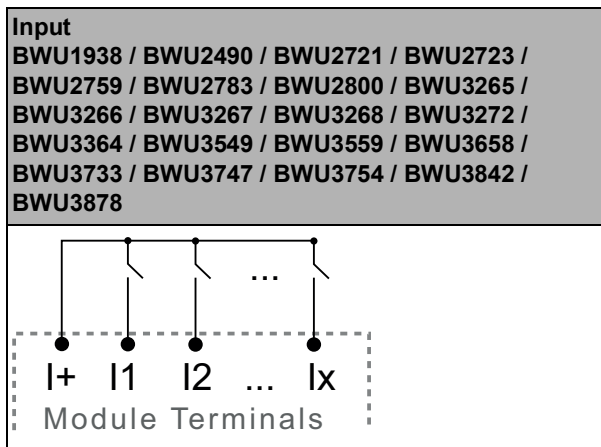



# Digital Modules ASi in IP20, 22,5 mm



## Power supply NPN

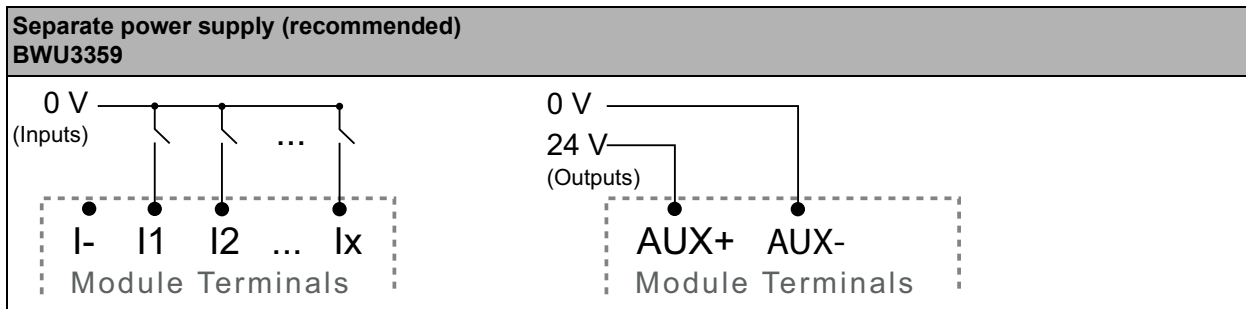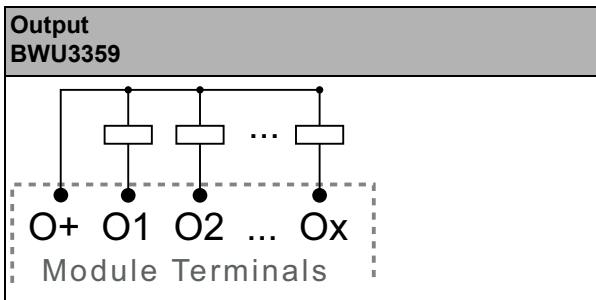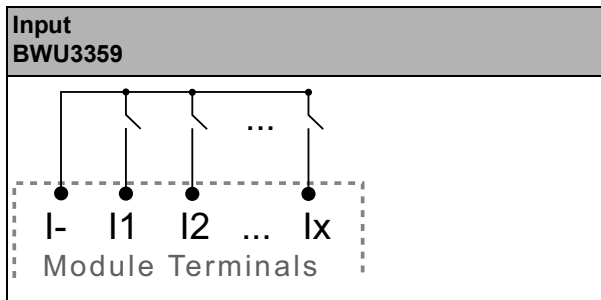

## Connection relay output

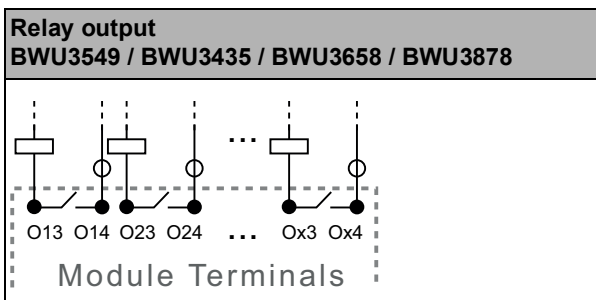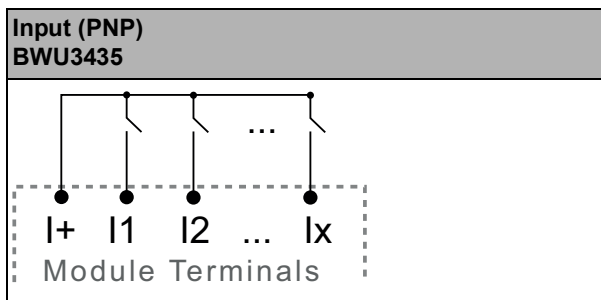

## Accessories:

- ASi-5/ASi-3 Address Programming Device (art. no. BW4708)



**SCATTERGOOD  
& JOHNSON LTD**  
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

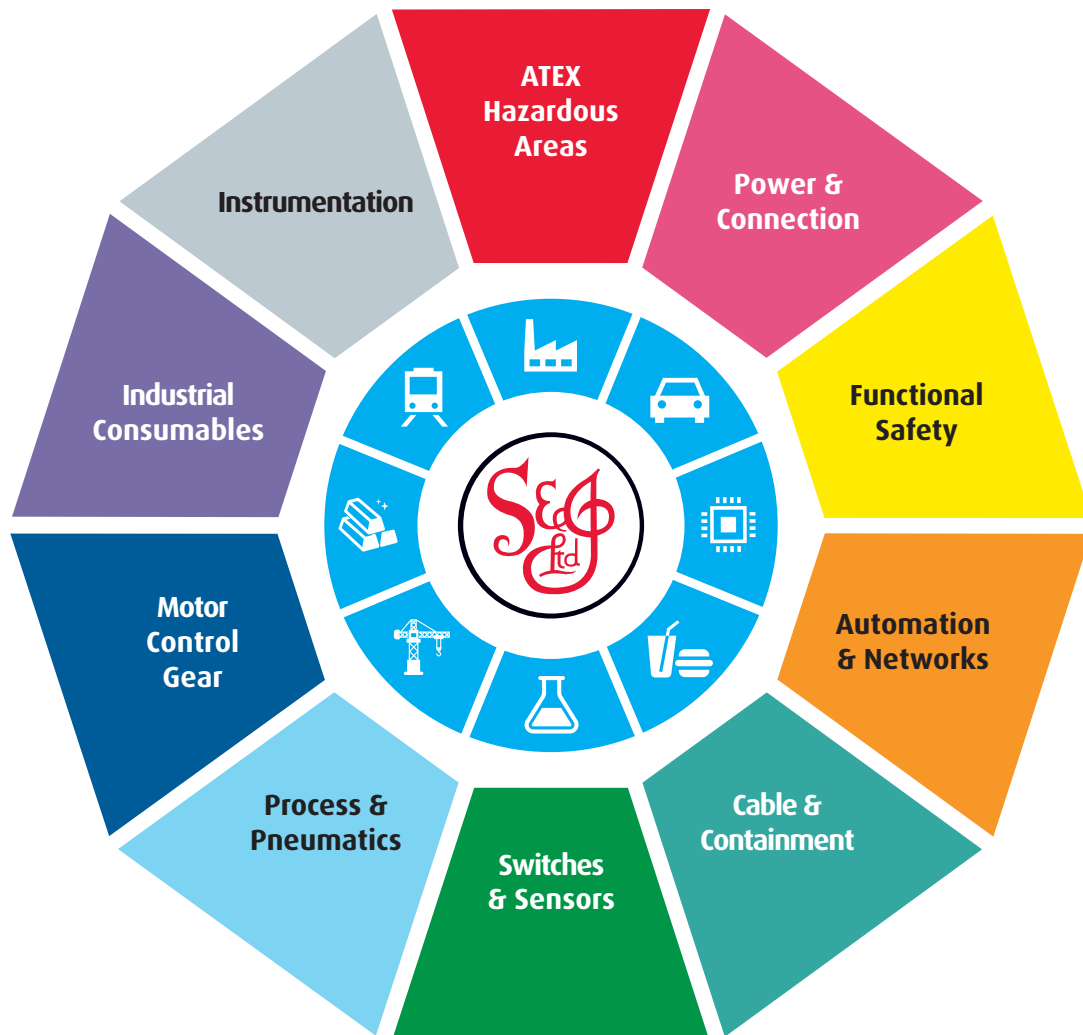

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

**[www.scatts.co.uk](http://www.scatts.co.uk)**