

Technical Data Sheet

Enclosed Safety Switches

CDPD196
Issue 2

GW Range

The 'GW' range, is a tensioned wire system which is designed to cover small to medium sized runs. (Up to 100m max. between pairs). A Grabwire switch assembly gives a continuous and uninterrupted safety provision over long distances.

Prior to the development of Grabwire switches, machinery such as conveyors had to be fitted with a number of separate Emergency Stops. Positioning the 'Stops' such that at least one could be reached from any point, was often difficult to fulfil. Conveyors are the obvious application for such devices, but with the ability to take the protection wire around bends, and provide safety cover over both horizontal and vertical runs, the system lends itself to many different applications.





The minimum requirements in this situation would be a Grabwire Switch at one end and an Anchor Box at the other.

The effective installation involves the fitting of Grabwire switches at both ends of the 'pull wire'. However, this does involve electrical cabling up to, and between, the switching units. The use of a non electrical 'Anchor Box' at one end removes the need to cable between the end assemblies.

The 'Anchor Box' effectively houses a long spring, which is compressed when the 'pull wire' is activated. At a fixed point during the compression, a latch is operated which locks the spring in the compressed or shortened state. When the 'pull wire' is released, it will be in a 'slack' condition, and the switching unit at the other end of the 'pull wire' senses the 'slack' condition and activates the 'Stop' signal. Although the 'Anchor Box' contains no electrical contacts, the latch needs manual resetting to restore the system.

Apart from the Grabwire switch, the only other item required in a simple set-up, is the connection kit. In the kit you will find all the parts necessary to install the system.



Image				
Cat. No.	GWN1	GWN2	GWN2/SS	GWDE
Description	Universal single ended	Universal single ended	Universal single ended	Universal double ended
Max. span between pairs (L) (or between switch & anchor box)	50m	100m	100m	2 x 100m
Encl. Material	Die-cast Aluminium (LM24)	Die-cast Aluminium (LM24)	Stainless Steel 1.6 mm Grade 316	Sheet Steel 1.6 mm
Finish	Textured Powder Coat RAL 3020	Textured Powder Coat RAL 3020	Polished	Textured Powder Coat RAL 3020
Ingress Protection	IP65	IP65	IP65	IP65
Rope Tensioner	Included	Included	Included	Included
Earthing	M4 Internal & External	M5 Internal & External	M5 Internal & External	M5 Internal & External
Electrical Contacts	2 N/C (Safety) + 1 N/O	2 N/C (Safety) + 2 N/O	2 N/C (Safety) + 2 N/O	2 x {2 N/C (Safety) + 2 N/O}
Electrical Rating:- I_{th} / U_i	10A/415V	10A/415V	16A/600V	16A/600V
AC21/22/23A to BS EN 60947-3	-	-	16A at 415V	16A at 415V
AC15 to BS EN 60947-5-1	5A at 415V	5A at 415V	5A at 415V	5A at 415V
Optional Indicator Lamp	✓	✓	-	-
Setting-up indicator	✓	✓	✓	✓
Hand reset knob	✓	✓	✓	✓
Universal (LH or RH) mounting	✓	✓	✓	✓

T e c h n i c a l D a t a S h e e t

E n c l o s e d S a f e t y S w i t c h e s


CDPD196
Issue 2

Minimum Installation Requirements

When planning a grabwire installation, it is vital that the operators safety is always the primary objective. Plan the route of the 'pull wire' carefully to ensure maximum accessibility by the possible users. Ensure that supports can be placed at a maximum of 2m spacing. The placement of the grabwire switches need to be in reachable positions for setting-up, monitoring and resetting after an incident.

It is necessary to place the first eyebolt close to the switching body to ensure that if the wire is pulled at a very oblique angle, then the pull on the switch remains linear. Although corners/bends can be incorporated in the run, try to avoid too many. It may be necessary to install additional systems to ensure an effective installation. The ultimate objective must be to provide a free running 'pull wire' with the minimum of resistance to movement.

Measure each run and select a Grabwire switch whose max. span (L) is greater than the measured distance. If the total length is over 100m, then multiple installations will be necessary. If the length is excessive, then consider using the 'LW' system. Choose the Stainless Steel grabwire switch option if the working environment will be continuously wet or subject to systematic cleansing routines.

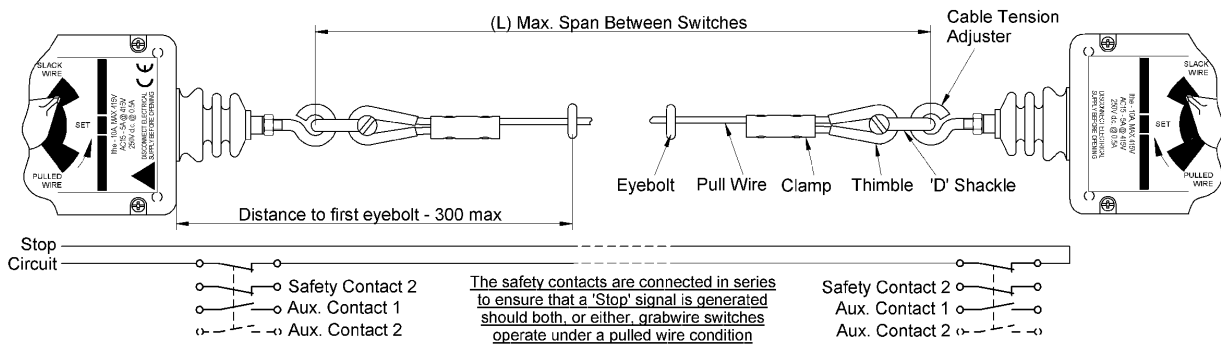

Accessories






To assist with the possible variations necessary when designing an installation, the following accessories are available.

Image	Description	Cat. No.
	Each connection kit includes:- <ul style="list-style-type: none"> Multi strand steel catenary cable with red PVC covering* Stainless steel eyebolt supports. Sufficient to support the cable at 2M intervals. Supplied complete with two fixing nuts* 2 x Stainless steel thimbles 2 x Stainless steel 'D' shackles 2 x Stainless steel clamps 	Basic - GK00*
		Up to 5m - GK5
		Up to 10m - GK10
		Up to 20m - GK20
		Up to 50m - GK50
		Up to 100m - GK100
	Non Switching Anchor Box with manual reset	GW/AB
	Indicator lamp, which when powered through one of the spare N/O contacts, will indicate which grabwire switch has been actuated. (Indicates on 'Pulled' or 'Slack Wire' conditions) Supplied complete with bulb. Other colours and supply voltages available to order. 24V (Amber) Annunicator Lamp 110V (Amber) Annunicator Lamp	GW024A GW110A
	Stranded steel 'pull wire' with red PVC covering. (Ø5 approx O/D) Sold per Metre. Pull Wire (As supplied in the connecting kits)	MR 0221


Technical Data Sheet

Enclosed Safety Switches

CDPD196
Issue 2

Image	Description	Cat. No.
	Standard length 'eyebolt' for 'pull wire' support. Supplied complete with 2 x locking nuts. Material- Stainless steel, Size - M6, Overall length - 80, Thread length - 58 Standard M6 Eyebolt (As supplied in the connection kits)	GWA 0070
	Extended length 'eyebolt' for 'pull wire' support. Supplied complete with 2 x locking nuts. Material - Stainless steel, Size - M6, Overall length - 230, Thread length - 200 Extended M6 Eyebolt	GWC 0270
	Wrap around 'thimble' to terminate the 'pull wire'. Material - Stainless steel Termination 'thimble' (As supplied in the connection kits)	GWC 0163
	'D Shackle' to connect the 'pull wire' to the grabwire switches. Material- Stainless steel Connection 'D Shackle' (As supplied in the connection kits)	GWC 0166
	Cable clamp for securing the 'pull wire' back upon itself once passed around the 'thimble'. Tightening via 2 x Allen screws. Material - Stainless steel Cable clamp (As supplied in the connection kits)	GWC 0167
	Allen key for tightening 'Cable Clamp' above. Size- 2.5 A/F Allen Key (As supplied in the connection kits)	GWC 0189

Dimensions

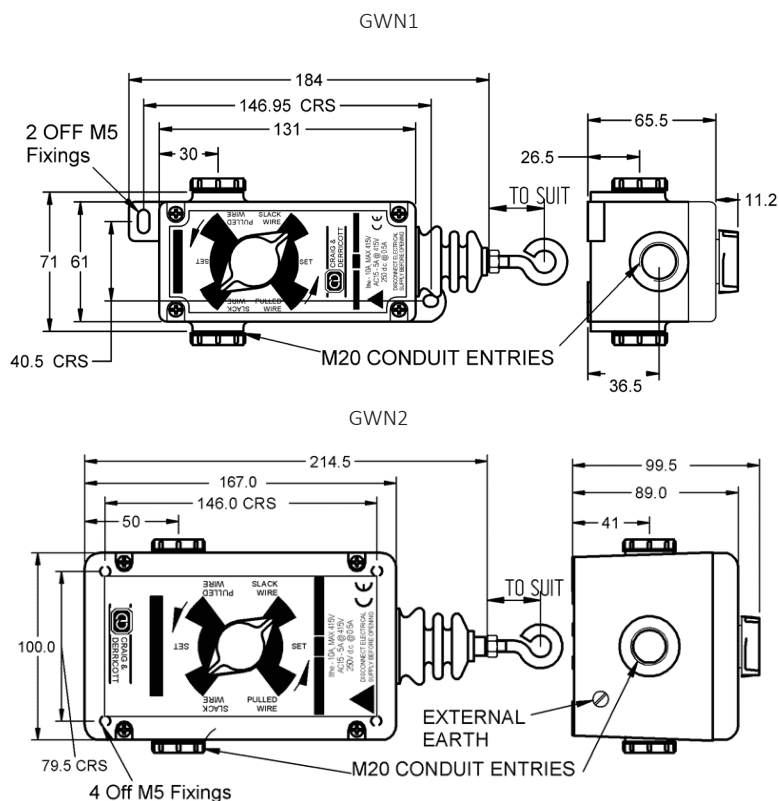


Technical Data Sheet


Enclosed Safety Switches

CDPD196
Issue 2


GWN2/SS

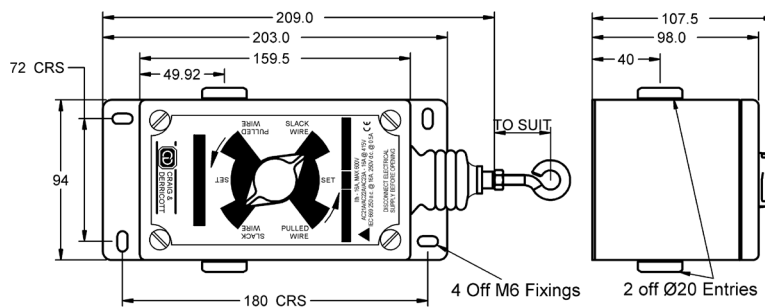

GW/AB Anchor Box

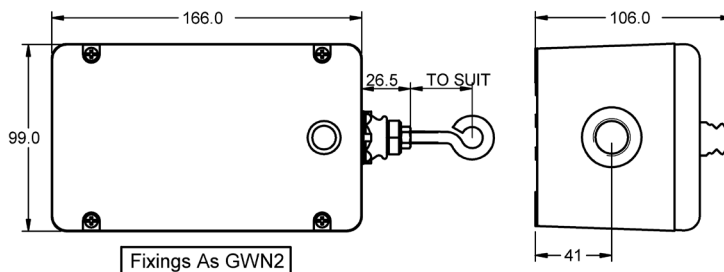

GWDE

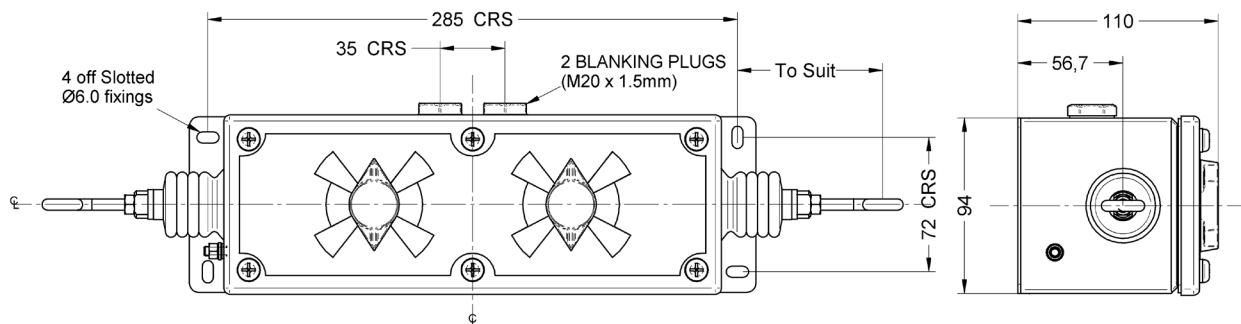



**SCATTERGOOD
& JOHNSON LTD**
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk