

Data sheet

Order No.: 1757077

Type: MSTB 2,5/ 8-ST-5,08

Plug component, Screw connection with tension sleeve



The figure shows a 10-position version of the product

1 Main features



• No. of pos.	8	• Nominal current	12 A
• Conductor cross section	2.5 mm ²	• Nominal voltage	320 V
• Color	green	• Connection direction	0 °
• Pitch	5.08 mm	• Type of packaging	packed in cardboard
• Connection method	Screw connection with tension sleeve		

2 Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Allows connection of two conductors



Make sure you always use the latest documentation.


It can be downloaded at: phoenixcontact.net/product/1757077

1757077 MSTB 2,5/ 8-ST-5,08**3 Table of contents**

1	Main features.....	1
2	Your advantages	1
3	Table of contents	2
4	3D model in PDF can be activated (Acrobat Reader only).....	3
5	item properties.....	4
	5.1 Connection capacity	4
	5.2 Material data	4
6	Dimensions.....	5
	6.1 Dimensions for the product	5
7	Series drawing.....	6
8	Packaging information	7
9	Application.....	7
	9.1 Temperature limit values	7
10	Mechanical tests.....	8
	10.1 Termination and connection method.....	8
	10.2 Pull-out test	8
11	Electrical tests	9
	11.1 Electrical data	9
	11.2 Air and creepage distances	9
12	Current carrying capacity/derating curves	10
13	Environmental and durability tests	13
	13.1 Vibration test	13
14	Classification for connectors.....	13
15	Approvals	13
16	Commercial Data.....	15
17	corresponding headers.....	15
18	Accessories.....	16
19	Combination tests.....	17

1757077 MSTB 2,5/ 8-ST-5,08

4 3D model in PDF can be activated (Acrobat Reader only)

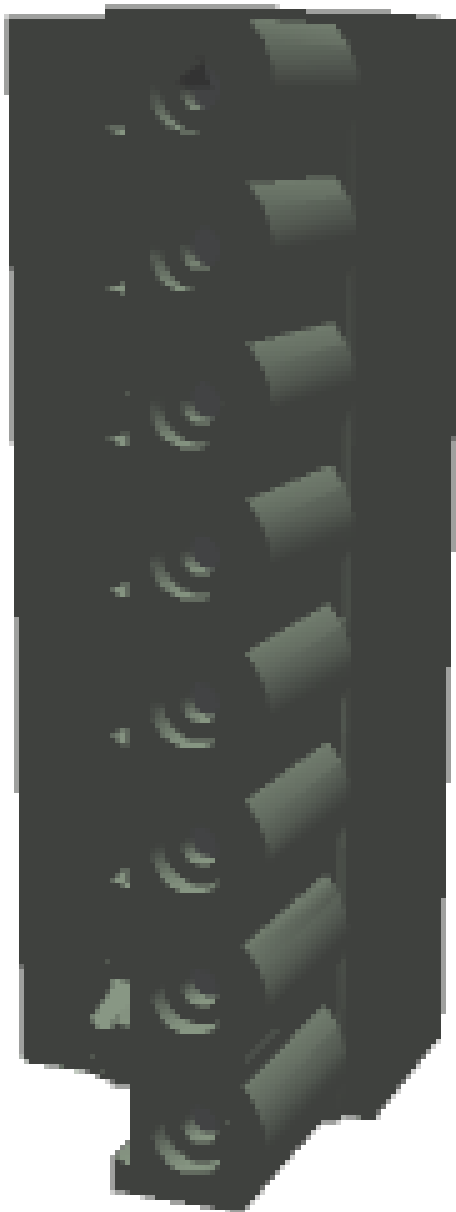

1757077 MSTB 2,5/ 8-ST-5,08**5 item properties**

Order No.	1757077
Type	MSTB 2,5/ 8-ST-5,08
Type of contact	Female connector
Range of articles	MSTB 2,5/...ST
Pitch	5.08 mm
Number of positions	8
Connection method	Screw connection with tension sleeve
Drive form screw head	Slotted
Screw thread	M3
Tightening torque	0.5 Nm ... 0.6 Nm
Note on tightening torque	CR-MSTB may only be used after reflow soldering. CR-MSTB NAT HT may also be used prior to reflow soldering.
Locking	without

5.1 Connection capacity

Conductor cross section, solid	0.2 mm ² to 2.5 mm ²
Conductor cross section, flexible	0.2 mm ² to 2.5 mm ²
Conductor cross section AWG/kcmil	24 to 12
2 conductors with same cross section, solid	0.2 mm ² to 1 mm ²
2 conductors with same cross section, stranded	0.2 mm ² to 1.5 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm ² to 2.5 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve	0.25 mm ² to 2.5 mm ²
2 conductors with same cross section, stranded, with ferrule without plastic sleeve	0.25 mm ² to 1 mm ²
2 conductors with same cross section, stranded, with TWIN ferrules with plastic sleeve	0.5 mm ² to 1.5 mm ²
Cylindrical gauge a x b / diameter	2.8 mm x 2.4 mm / 2.5 mm
Stripping length	7 mm

5.2 Material data


Material of metal parts	
Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Terminal point surface	Sn 5 µm ... 7 µm
Surface contact area	Sn 5 µm ... 7 µm
Surface characteristics	hot-dip tin-plated
Insulating material data	
Insulating material	PA
CTI according to IEC 60112	600
Flammability rating according to UL 94	V0
Color	green (6021)
Glow wire flammability index GWF1 according to EN 60695-2-12	850
Glow wire ignition temperature GWIT according to EN 60695-2-13	775
Temperature for the ball pressure test according to EN 60695-10-2	125 °C

1757077 MSTB 2,5/ 8-ST-5,08**6 Dimensions****6.1 Dimensions for the product**

Length	18.3 mm
Width	40.64 mm
Total height	15 mm
Dimension a	35.56 mm

1757077 MSTB 2,5/ 8-ST-5,08

7 Series drawing

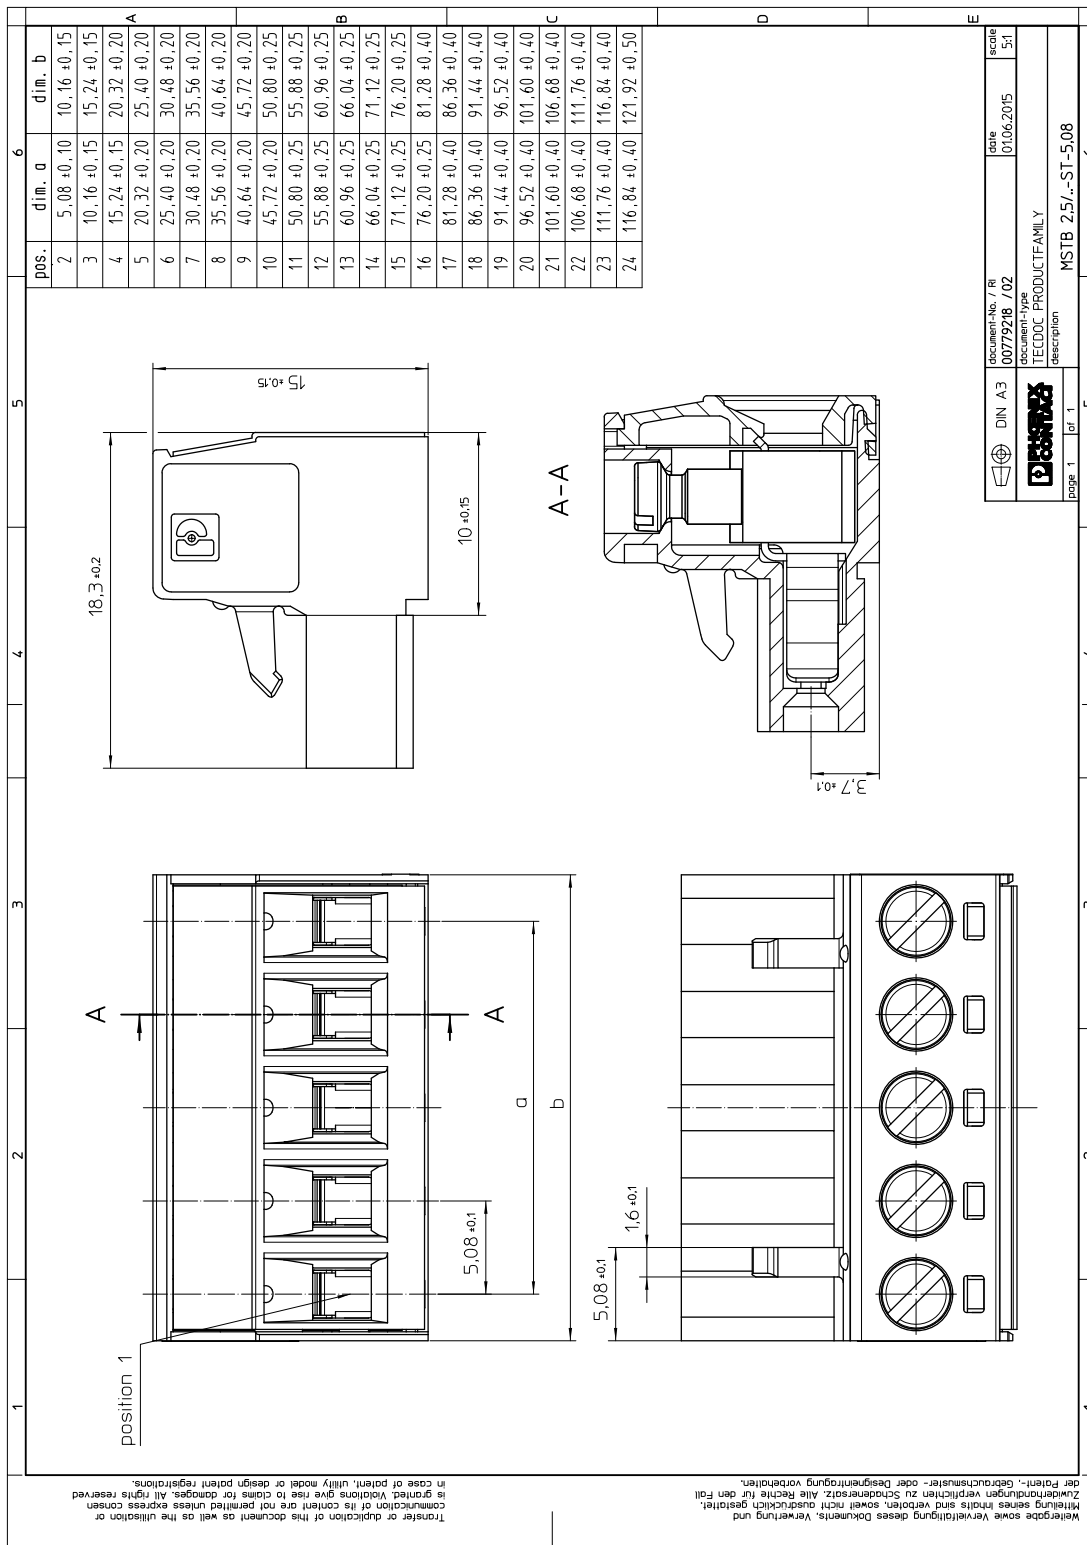

1757077 MSTB 2,5/ 8-ST-5,08**8 Packaging information**

Type of packaging	packed in cardboard
Pieces per package	50
Outer packaging type	Carton

9 Application**9.1 Temperature limit values**

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C (dependent on the derating curve)

1757077 MSTB 2,5/ 8-ST-5,08**10 Mechanical tests**

Mechanical test group A	
Specification	IEC 61984:2008-10
Visual test	Test passed
Specification	IEC 60512-1-1:2002-02
Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02
Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12
Insertion and withdrawal force	Test passed
Specification	IEC 60512-13-2:2006-02
No. of cycles	25
Insertion strength per pos. approx.	8 N
Withdraw strength per pos. approx.	6 N
Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N
Contact retention in insert	Test passed
Specification	IEC 60512-15-1:2008-05
Test force per pos.	27 N

10.1 Termination and connection method

Specification	IEC 60999-1:1999-11
Check for damage to conductor or loosening	Test passed

10.2 Pull-out test

Termination and connection method: pull-out test	
Specification	IEC 60999-1:1999-11
Result	Test passed
Conductor cross section/conductor type/tractive force actual value	0.2 mm ² / solid / > 10 N
Conductor cross section/conductor type/tractive force actual value	0.2 mm ² / stranded / > 10 N
Conductor cross section/conductor type/tractive force actual value	2.5 mm ² / solid / > 50 N
Conductor cross section/conductor type/tractive force actual value	2.5 mm ² / stranded / > 50 N
Conductor cross section/conductor type/tractive force actual value	AWG 12 / stranded / > 60 N

1757077 MSTB 2,5/ 8-ST-5,08**11 Electrical tests****11.1 Electrical data**

Rated current / conductor cross section	12 A / 2.5 mm ²
Rated insulation voltage (III/2)	320 V
Rated surge voltage (III/2)	4 kV
Contact resistance	1.3 mΩ
Degree of pollution	2

11.2 Air and creepage distances


Component	Plug component		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	I		
Comparative tracking index (IEC 60112:2003-01)	CTI 600		
Rated insulation voltage	250 V	320 V	630 V
Rated surge voltage	4 kV	4 kV	4 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	3 mm	3 mm	3 mm
Minimum value of the creepage path requirement in acc. with table	3.2 mm	3 mm	3.2 mm

1757077 MSTB 2,5/ 8-ST-5,08


12 Current carrying capacity/derating curves

Specification	IEC 61984:2008-10
Note	Representation based on IEC 60512-5-2:2002-02
Reduction factor	0.8
Number of positions	See diagram
Conductor cross section	2.5 mm ²


Type: MSTB 2,5/...-ST-5,08 with CC 2,5/...-G-5,08 P26THR

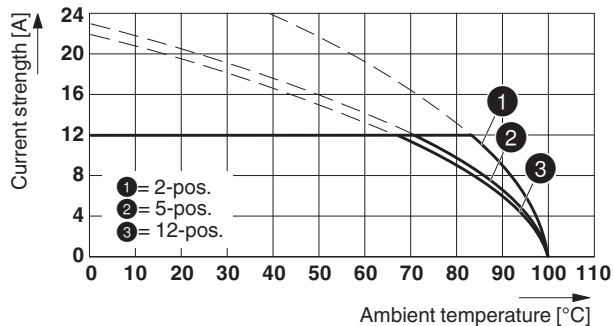

Type: MSTB 2,5/...-ST-5,08 with CCV 2,5/...-G-5,08 P26THR

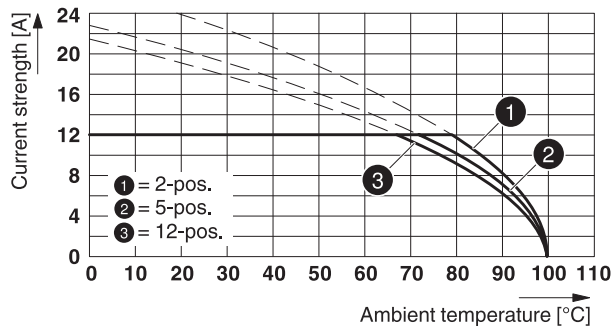


Type: MSTB 2,5/...-ST-5,08 with CCVA 2,5/...-G-5,08 P26THR

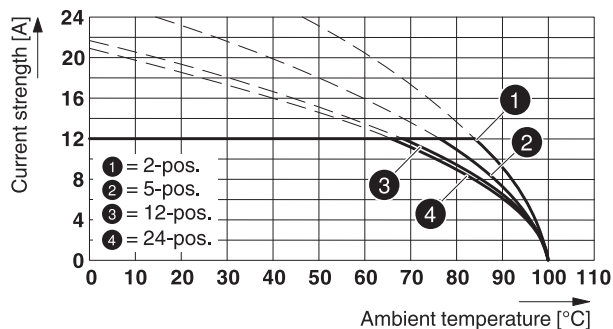


1757077 MSTB 2,5/ 8-ST-5,08


Type: MSTB 2,5/...-ST-5,08 with MDSTB 2,5/...-G-5,08

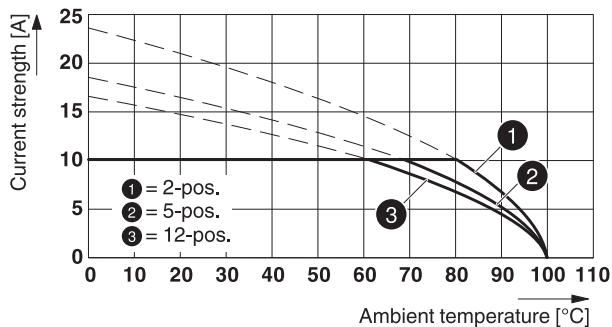

Type: MSTB 2,5/...-ST-5,08 with MDSTBA 2,5/...-G-5,08

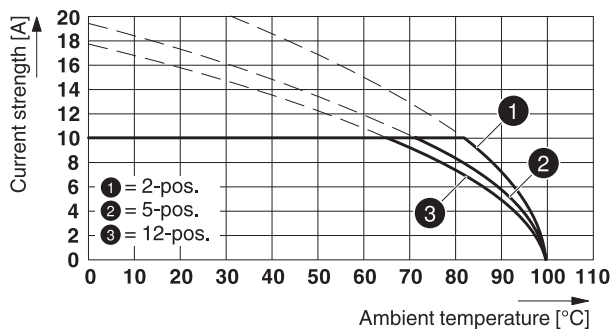


Type: MSTB 2,5/...-ST-5,08 with MDSTBW 2,5/...-G-5,08

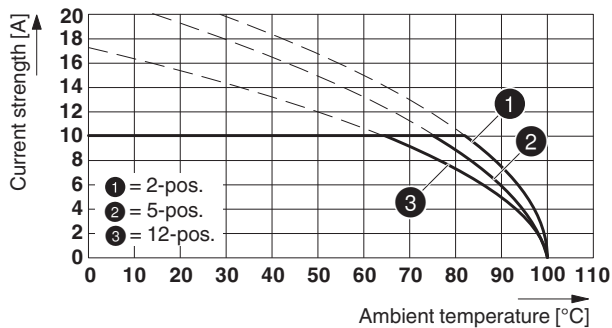


Type: MSTB 2,5/...-ST-5,08 with MDSTBV 2,5/...-G-5,08

1757077 MSTB 2,5/ 8-ST-5,08


Type: MSTB 2,5/...-ST-5,08 with MVSTBU 2,5/...-GB-5,08

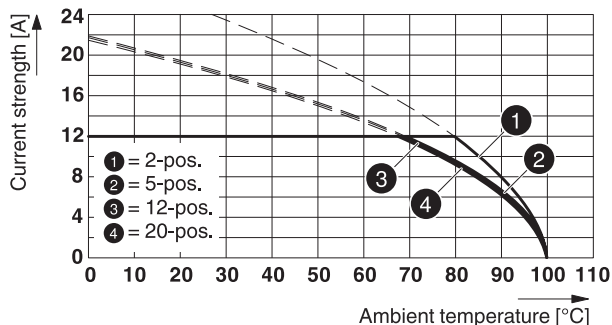

Type: MSTB 2,5/...-ST-5,08 with MSTB 2,5/...-G-5,08

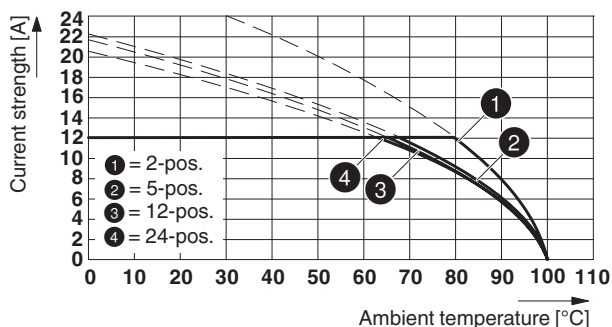

Type: MSTBP 2,5/...-ST-5,08 with MDSTBVA 2,5/...-G-5,08

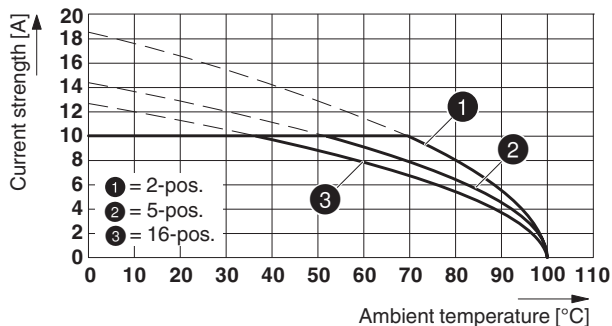

Type: MSTB 2,5/...-ST(-5,08) with EMSTBVA 2,5/...-G(-5,08)

86981_1000_en

Type: MSTB 2,5/...-ST-5,08 with MSTBW 2,5/...-G-5,08

Type: MSTB 2,5/...-ST-5,08 with MSTBVA 2,5/...-G-5,08

87454_1000_en

Type: MSTB 2,5/...-ST-5,08 with MSTBV 2,5/...-G-5,08

87683_1000_en


1757077 MSTB 2,5/ 8-ST-5,08**13 Environmental and durability tests****13.1 Vibration test**

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis


14 Classification for connectors

Specification	IEC 61984:2008-10
Main features	Connectors without switching capacity (COC)
Construction form	Fixed connectors
Strain relief elements	without strain relief
Connection method	Can be reconnected
Protection against electric shock	Not encapsulated - touch-proof when inserted
Protective conductor	without PE
Lock	no
Connection method	Screw terminal points

15 Approvals

CSA 				
Use group	B	D		
mm ² /AWG/kcmil	28-12	28-12		
Voltage	300 V	300 V		
Current	10 A	10 A		

VDE Gutachten mit Fertigungsüberwachung 				
mm ² /AWG/kcmil	0.2-2.5			
Voltage	250 V			
Current	12 A			

IECEE CB Scheme 				
mm ² /AWG/kcmil	0.2-2.5			
Voltage	250 V			
Current	12 A			

cULus Recognized 				
Use group	B	D		
mm ² /AWG/kcmil	30-12	30-12		
Voltage	300 V	150 V		
Current	15 A	15 A		

2017-09-29

Product version 03

Document revision 0

1757077 MSTB 2,5/ 8-ST-5,08

EAC ENEC

1757077 MSTB 2,5/ 8-ST-5,08**16 Commercial Data**

Order No.	1757077
Type	MSTB 2,5/ 8-ST-5,08
Pieces per package	50
Net weight	13 g
GTIN	4017918029609
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

17 corresponding headers

Order No.	Type
1735824	MSTBW 2,5/ 8-G-5,08
1755794	MSTBVA 2,5/ 8-G-5,08
1757307	MSTBA 2,5/ 8-G-5,08
1758076	MSTBV 2,5/ 8-G-5,08
1759075	MSTB 2,5/ 8-G-5,08
1762431	MDSTB 2,5/ 8-G1-5,08
1762567	MDSTBV 2,5/ 8-G1-5,08
1767436	SMSTBA 2,5/ 8-G-5,08
1769528	SMSTB 2,5/ 8-G-5,08
1771008	MSTBA 2,5/ 8-G-5,08-LA
1808528	MSTBV 2,5/ 8-GEH-5,08
1840052	MDSTB 2,5/ 8-G-5,08
1842128	MDSTBA 2,5/ 8-G-5,08
1842270	MDSTBW 2,5/ 8-G-5,08
1845390	MDSTBVA 2,5/ 8-G-5,08
1845549	MDSTBV 2,5/ 8-G-5,08
1847165	MSTBO 2,5/ 8-GR-5,08
1850495	MSTBO 2,5/ 8-GL-5,08
1859577	EMSTBVA 2,5/ 8-G-5,08
1880368	EMSTBA 2,5/ 8-G-5,08
1898897	DFK-MSTBA 2,5/ 8-G-5,08
1899197	DFK-MSTBVA 2,5/ 8-G-5,08
1902806	MSTBA 2,5/ 8-G-5,08 THT
1902877	MSTBVA 2,5/ 8-G-5,08 THT
1937295	MSTBA 2,5/ 8-G-5,08 THT-R56
1940473	MSTBVA 2,5/ 8-G-5,08 THT-R56
1954537	CC 2,5/ 8-G-5,08 P26THR
1954647	CC 2,5/ 8-G-5,08 P26THRR56
1954980	CCA 2,5/ 8-G-5,08 P26THR
1955099	CCA 2,5/ 8-G-5,08 P26THRR56
1955471	CCV 2,5/ 8-G-5,08 P26THR
1955581	CCV 2,5/ 8-G-5,08 P26THRR56
1955918	CCVA 2,5/ 8-G-5,08 P26THR
1956027	CCVA 2,5/ 8-G-5,08 P26THRR56
1959121	CCA 2,5/ 8-GL-5,08P26THR
1959192	CCA 2,5/ 8-GL-5,08P26THRR56
1959260	CCA 2,5/ 8-GR-5,08P26THR
1959338	CCA 2,5/ 8-GR-5,08P26THRR56

1757077 MSTB 2,5/ 8-ST-5,08






Order No.	Type
1959969	CCVA 2,5/ 8-GL-5,08P26THR
1960068	CCVA 2,5/ 8-GL-5,08P26THRR56
1960149	CCVA 2,5/ 8-GR-5,08P26THR
1960217	CCVA 2,5/ 8-GR-5,08P26THRR56

18 Accessories



Description	Order No.	Type
Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip	1205053	SZS 0,6X3,5
	0804293	SK 5,08/3,8:FORTL.ZAHLEN
	1803921	KGG-MSTB 2,5/ 8
	1783779	KGS-MSTB 2,5/ 8
	0803883	SK U/2,8 WH:UNBEDRUCKT
	0805108	SK 5,08/2,8:SO
Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm	1051993	B-STIFT
Coding profile, is inserted into the slot on the plug or inverted header, red insulating material	1734634	CP-MSTB

1757077 MSTB 2,5/ 8-ST-5,08

19 Combination tests

					
	MSTB 2,5/..-ST	CC 2,5/..-G	CCV 2,5/..-G	CCVA 2,5/..-G	MDSTB 2,5/..-G
Specification		IEC 61984	IEC 61984	IEC 61984	IEC 61984
Mechanical tests (A)					
Insertion/withdrawal force per position		approx. 8 N / 6 N	approx. 8 N / 6 N	approx. 8 N / 6 N	approx. 8 N / 6 N
Polarization when inserted Requirement >20 N		Test passed	Test passed	Test passed	Test passed
Contact holder in insert Requirements >20 N		Test passed	Test passed	Test passed	Test passed
Durability tests (B)					
Contact resistance R ₁		1.3 mΩ	1.2 mΩ	1.3 mΩ	1.6 mΩ
Insertion/withdrawal cycles		25	25	25	25
Contact resistance R ₂		1.4 mΩ	1.2 mΩ	1.4 mΩ	1.6 mΩ
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)		4.8 kV	4.8 kV	4.8 kV	4.8 kV
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)		2.21 kV	2.21 kV	2.21 kV	2.21 kV
Insulation resistance Requirements > 5 MΩ		> 2 TΩ	> 0.1 TΩ	> 7.0 TΩ	> 0.1 TΩ
Thermal tests (C)					
Tested number of positions		12	12	24	12
Tested conductor cross section		2.5 mm ²	2.5 mm ²	2.5 mm ²	2.5 mm ²
Test current		12 A	12 A	12 A DC	10 A
Upper limiting temperature Requirements < 100°C		Test passed	Test passed	Test passed	Test passed
Climatic tests (D)					
Test sequence 1: low temperature storage		-40 °C/2 h	-40 °C/2 h	-40 °C/2 h	-40 °C/2 h
Test sequence 2: heat storage		100 °C/168 h	100 °C/168 h	100 °C/168 h	100 °C/168 h
Test sequence 3: noxious gas storage (ISO 6988)		0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)		4.8 kV	4.8 kV	4.8 kV	4.8 kV
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)		2.21 kV	2.21 kV	2.21 kV	2.21 kV
Environmental and endurance tests (E)					
Specification		IEC 61984:2008-10	IEC 61984:2008-10	IEC 61984:2008-10	IEC 61984:2008-10
Degree of protection		Finger safety with IP20 test finger	Finger safety with IP20 test finger	Finger safety with IP20 test finger	Finger safety with IP20 test finger

1757077 MSTB 2,5/ 8-ST-5,08



MSTB 2,5/..-ST

MDSTBA 2,5/..-G



MDSTBW 2,5/..-G

MDSTBV 2,5/..-G

DFK-MSTBA 2,5/..-G

Specification	IEC 61984	IEC 61984	IEC 61984	IEC 61984
Mechanical tests (A)				
Insertion/withdrawal force per position	approx. 8 N / 6 N	approx. 8 N / 6 N	approx. 8 N / 6 N	
Polarization when inserted Requirement >20 N	Test passed	Test passed	Test passed	
Contact holder in insert Requirements >20 N	Test passed	Test passed	Test passed	
Durability tests (B)				
Contact resistance R ₁	1.6 mΩ	1.6 mΩ	2.6 mΩ	
Insertion/withdrawal cycles	25	25	25	
Contact resistance R ₂	1.6 mΩ	1.7 mΩ	2.6 mΩ	
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)	4.8 kV	4.8 kV	4.8 kV	
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	2.21 kV	2.21 kV	2.21 kV	
Insulation resistance Requirements > 5 MΩ	> 50 GΩ	> 0.3 TΩ	> 50 GΩ	
Thermal tests (C)				
Tested number of positions	12	12	12	
Tested conductor cross section	2.5 mm ²	2.5 mm ²	2.5 mm ²	
Test current	10 A	10 A	10 A	
Upper limiting temperature Requirements < 100°C	Test passed	Test passed	Test passed	
Climatic tests (D)				
Test sequence 1: low temperature storage	-40 °C/2 h	-40 °C/2 h	-40 °C/2 h	
Test sequence 2: heat storage	100 °C/168 h	100 °C/168 h	100 °C/168 h	
Test sequence 3: noxious gas storage (ISO 6988)	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)	4.8 kV	4.8 kV	4.8 kV	
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	2.21 kV	2.21 kV	2.21 kV	
Environmental and endurance tests (E)				
Specification	IEC 61984:2008-10	IEC 61984:2008-10	IEC 61984:2008-10	
Degree of protection	Finger safety with IP20 test finger	Finger safety with IP20 test finger	Finger safety with IP20 test finger	

1757077 MSTB 2,5/ 8-ST-5,08



MSTB 2,5/...-ST

MVSTBU 2,5/...-GB



MSTB 2,5/...-G

MDSTBVA 2,5/...-G

EMSTBVA 2,5/...-G

Specification	IEC 61984	IEC 61984	IEC 61984	DIN VDE 0627 (in parts)
Mechanical tests (A)				
Insertion/withdrawal force per position	approx. 8 N / 6 N	approx. 8 N / 6 N	approx. 8 N / 6 N	approx. 5 N / 4 N
Polarization when inserted Requirement >20 N	Test passed	Test passed	Test passed	
Contact holder in insert Requirements >20 N	Test passed	Test passed	Test passed	
Durability tests (B)				
Contact resistance R ₁	1.9 mΩ	1.4 mΩ	2.5 mΩ	1.1 mΩ
Insertion/withdrawal cycles	25	25	25	100
Contact resistance R ₂	2.2 mΩ	1.4 mΩ	2.5 mΩ	1.5 mΩ
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)	4.8 kV	4.8 kV	4.8 kV	4.8 kV
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	2.21 kV	2.21 kV	2.21 kV	2.21 kV
Insulation resistance Requirements > 5 MΩ	> 0.7 TΩ	> 0.3 TΩ	> 0.2 TΩ	> 8 TΩ
Thermal tests (C)				
Tested number of positions	20	24	16	6
Tested conductor cross section	2.5 mm ²	2.5 mm ²	2.5 mm ²	2.5 mm ²
Test current	12 A	12 A	10 A	12 A
Upper limiting temperature Requirements < 100°C	Test passed	Test passed	Test passed	
Climatic tests (D)				
Test sequence 1: low temperature storage	-40 °C/2 h	-40 °C/2 h	-40 °C/2 h	-40 °C/2 h
Test sequence 2: heat storage	100 °C/168 h	100 °C/168 h	100 °C/168 h	100 °C/168 h
Test sequence 3: noxious gas storage (ISO 6988)	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)	4.8 kV	4.8 kV	4.8 kV	4.8 kV
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	2.21 kV	2.21 kV	2.21 kV	2.21 kV
Environmental and endurance tests (E)				
Specification	IEC 61984:2008-10	IEC 61984:2008-10	IEC 61984:2008-10	IEC 61984:2008-10
Degree of protection	Finger safety with IP20 test finger	Finger safety with IP20 test finger	Finger safety with IP20 test finger	Finger safety with IP20 test finger

1757077 MSTB 2,5/ 8-ST-5,08



MSTB 2,5/..-ST

MSTBW 2,5/..-G

MSTBVA 2,5/..-G

MSTBV 2,5/..-G

Specification

IEC 61984

IEC 61984

IEC 61984

Mechanical tests (A)

Insertion/withdrawal force per position

approx. 8 N / 6 N

approx. 8 N / 6 N

approx. 8 N / 6 N

Polarization when inserted
Requirement >20 N

Test passed

Test passed

Test passed

Contact holder in insert
Requirements >20 N

Test passed

Test passed

Test passed

Durability tests (B)

Contact resistance R₁

1.3 mΩ

2.4 mΩ

2.4 mΩ

Insertion/withdrawal cycles

25

25

25

Contact resistance R₂

1.3 mΩ

2.5 mΩ

2.4 mΩ

Rated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)

4.8 kV

4.8 kV

4.8 kV

Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)

2.21 kV

2.21 kV

2.21 kV

Insulation resistance
Requirements > 5 MΩ

> 0.2 TΩ

> 0.2 TΩ

> 0.2 TΩ

Thermal tests (C)

Tested number of positions

20

24

20

Tested conductor cross section

2.5 mm²

2.5 mm²

2.5 mm²

Test current

12 A

Upper limiting temperature
Requirements < 100°C

Test passed

Test passed

Test passed

Climatic tests (D)

Test sequence 1: low temperature storage

-40 °C/2 h

-40 °C/2 h

-40 °C/2 h

Test sequence 2: heat storage

100 °C/168 h

100 °C/168 h

100 °C/168 h

Test sequence 3: noxious gas storage
(ISO 6988)

0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle

0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle

0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle

Rated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)

4.8 kV

4.8 kV

4.8 kV

Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)

2.21 kV

2.21 kV

2.21 kV

Environmental and endurance tests (E)

Specification

IEC 61984:2008-10

IEC 61984:2008-10

IEC 61984:2008-10

Degree of protection

Finger safety with IP20
test finger

Finger safety with IP20
test finger

Finger safety with IP20
test finger



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk