




Z-10-D-OUT

10-CH DIGITAL OUTPUT MODULE / RS485 MODBUS RTU

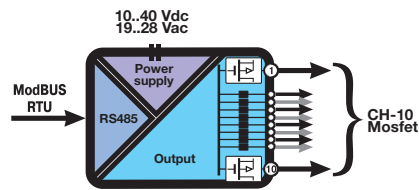

Z-10-D-OUT is used to drive N.10 MOSFETS from all of the control systems which are able to communicate with the transmission protocol MODBUS RTU through the RS485 serial interface. The digital output max load is 0,5 A (inductive) and 0,5 A (resistive) with maximum switch-on / switch-off cycle frequency of 2 cycles/second. The module is ModBUS Slave and can be coupled with any ModBUS Master device. A 3-way galvanic isolation among Power supply // output // RS485 circuits assures the integrity of your datas.

TECHNICAL SPECIFICATIONS

General Data

Power supply	10..40 Vdc / 19..28 Vac / 50-60 Hz
Power consumption	1,5 W
Isolation	1.500 Vac (3 way)
Status Indicators	Power supply, error, data transmission, data reception, output status
Protection Degree	IP20
Operating Temperature	-10..+65 °C
Dimension (W x H x D)	17.5 x 100 x 112 mm
Connection	Removable 3-way screw terminal 5,08 pitch Rear IDC10 connector for DIN 46277 rail
Mounting	35 mm DIN rail guide

Communication, Memory Process

Interface	2 wire RS485
Speed	Up to 115.200 bps
Protocol	ModBUS RTU slave
Communication Time	< 10 ms (38400 baud)
Distance	Up to 1.200 m
Connectivity	Max 32 nodes

Signals

Channel Numbers	10-CH optoisolated
Output type	Mosfet semiconductor with shared negative pole, overall connection by external supply (max 30 Vdc, min 6 Vdc)
Carrying capacity	0,5 A inductive load and 0,5 A resistive load with maximum switch-on / switch-off cycle frequency of 2 cycles/second
Safe time	From 33 ms to 2184
Outputs protection	From short circuit and overvoltage with 6..40 Vdc range
Diagnostic	Channel status, programmable


Programming

DIP switches	Baud rate, node, parity, serial port, bit stop, termination line
Software	Z-NET3 (Iec 61131) EASY Z-10-D-OUT (plug&play)

Standard

Approval	CE, RINA, UL-UR CSA
Norms	EN 50081-2; EN 55011; EN 50082-2; EN 61000-2-2/4; EN 50140/141; EN 61010-1



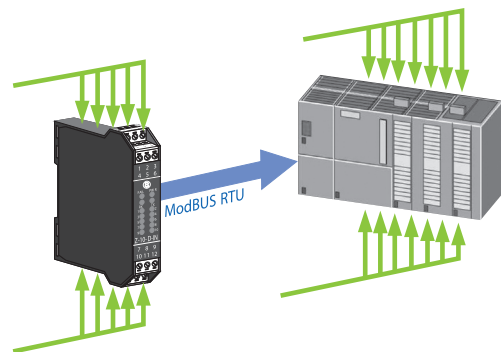

APPLICATION NOTE






ORDER CODES

Code	Description
Z-10-D-OUT	10-CH digital output control module / RS485 ModBUS RTU, 10..40 Vdc / 19..28 Vac

ACCESSORIES & SOFTWARE

			
Z-PC-DIN Backplane for power & bus communication pg. 36	Z-SUPPLY Switching power supply pg. 36	Z-NET IEC 61331 programming software pg. 36	EASY SETUP Plug&Play configuration software pg. 36

SIMILAR PRODUCTS

		
Z-D-OUT 10-CH Digital Input module / RS485 pg. 11	ZC-24DO 24 CH digital output CANopen / ModBUS pg. 29	ZC-16DI-8DO 16 CH digital input - 8 CH digital output CANopen / ModBUS pg. 30



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk