

■ Z LINE MULTISTANDARD SIGNAL CONVERTERS

Z109REG-BP

PROGRAMMABLE UNIVERSAL CONVERTER WITH BIPOLAR OUTPUT



Isolation 1.500 Vac @ 3 way

2-wire Power for transducers (max 20 mA)

Universal Input mA, mV, V, Ω , RTD, TC

Bipolar Output mA / V

Frontal Micro USB port for programming via software

Dimension 100x 112 x 18 mm (w x h x d)

Mounting on DIN 46277 guide


PBT Enclosure, black

Made in Italy

 **SENECA**
www.seneca.it

Z109REG-BP

PROGRAMMABLE UNIVERSAL CONVERTER WITH BIPOLAR OUTPUT

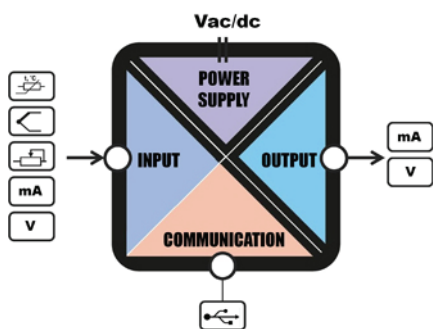

Z109REG-BP is a converter with universal input in voltage (mV), current (mA), thermocouples (TC), thermoresistance (RTD), potentiometer, rheostat, NTC.

The module allows the measurement and retransmission on bipolar isolated analogue output, in voltage or current. Exploiting the mini frontal USB port, Z109REG-BP can be programmed via PC with values of start and end-scale, kind of different input, root extraction, filter, burn-out etc.

TECHNICAL FEATURES

GENERAL DATA

Power supply	10..40 Vdc; 19..28 Vac
Max Consumption	2 W
Power for transducers	2-wire active input (20 Vdc)
Isolation	1.500 Vac @ 3 points
Input protection	Against Pulse Overvoltage 400 W/ms
Response time	From 35 ms (11 bit) and 140 ms (16 bit)
Status indicators	Power supply, Error, Alarm
Interfaces	Micro Frontal USB
Programming via PC	Via software EASY SETUP: input type, digital filter, root extraction, burn-out, start and end-scale of analogic output, value of the analog output in case of error, band-rejection filter, sampling time/ resolution, type of measurement for thermoresistance
Programming via DIP-switch	Input & output type, measurement scale
Measurement errors	Accuracy class 0,1% Thermal drift 0,01%/K
Memory	EEPROM; retention time: 40 years
Protection degree	IP20
Operating temp.	-20..+65°C
Weight	200 g
Dimension	100 x 112 x 17,5 mm
Enclosure	PBT, black
Connections	Screw terminals 2,5 mm2 Frontal Micro Usb
Mounting	DIN 35 mm guide

INPUT TYPE

Channels numbers	1 analog (active / passive)
Type	Thermocouples J,K,R,S,T,B,N,E, input impedance > 5 MW Thermoresistance PT100, PT500, PT1000, NI 100, KTY81, NTC, KTY84-130, KTY84-150 Potentiometer from 500 Ω to 100 kΩ Rheostat from 500 Ω to 25 kΩ Bipolar Voltage from 75 mV to 20 V Bipolar Current up to 20 mA


OUTPUT TYPE

Channels numbers	1 analog
Type	Voltage from -10 to +10 Vdc, min load 1.000 Ω Current from -20 to + 20 mA, max load 500 Ω

STANDARD

CE Norms	CE
Standard	EN 61010-1 EN 61000-6-2 EN 61000-6-4

APPLICATIVE EXAMPLE

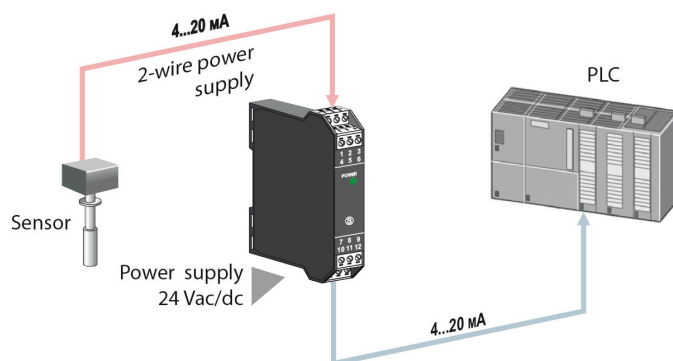

ORDER CODES

Code	Description
Z109REG-BP	Programmable Universal Converter with bipolar output
Z-SUPPLY	Single-phase switching power supply 24V @ 1,5 A
KIT-USB	Programming Kit, mini CD with EASY SETUP inclusive, manuals, USB driver for Windows and mini USB cable.
EASY SETUP	Configuration Software freely downloadable from www.seneca.it



Via Austria, 26 • 35127 Padova - (I) - Tel. +39 049 87.05.359
Fax +39 049 87.06.287 • www.seneca.it • info@seneca.it

The material in this document is for information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, SENECA assumes no liability resulting from errors or omissions, or from the use of the information contained herein.



**SCATTERGOOD
& JOHNSON LTD**
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk