

Data sheet

Order No.: 1781014

Type: MSTBT 2,5/ 5-ST-5,08

Plug component, Screw connection with tension sleeve



The figure shows a 10-position version of the product

1 Main features



• No. of pos.	5	• Nominal current	12 A
• Conductor cross section	2.5 mm ²	• Nominal voltage	320 V
• Color	green	• Connection direction	0 °
• Pitch	5.08 mm	• Type of packaging	packed in cardboard
• Connection method	Screw connection with tension sleeve		

2 Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Allows connection of two conductors



Make sure you always use the latest documentation.


It can be downloaded at: phoenixcontact.net/product/1781014

1781014 MSTBT 2,5/ 5-ST-5,08**3 Table of contents**

1	Main features.....	1
2	Your advantages	1
3	Table of contents	2
4	3D model in PDF can be activated (Acrobat Reader only).....	3
5	item properties.....	4
	5.1 Connection capacity.....	4
	5.2 Material data	4
6	Dimensions.....	4
	6.1 Dimensions for the product	5
7	Series drawing.....	6
8	Packaging information	7
9	Application.....	7
	9.1 Temperature limit values	7
10	Mechanical tests.....	8
	10.1 Termination and connection method.....	8
	10.2 Pull-out test	8
11	Electrical tests	9
	11.1 Electrical data	9
	11.2 Air and creepage distances	9
12	Current carrying capacity/derating curves	10
13	Environmental and durability tests	13
	13.1 Vibration test	13
14	Classification for connectors.....	13
15	Approvals	13
16	Commercial Data.....	15
17	corresponding headers.....	15
18	Accessories.....	15
19	Combination tests.....	17

1781014 MSTBT 2,5/ 5-ST-5,08

4 3D model in PDF can be activated (Acrobat Reader only)

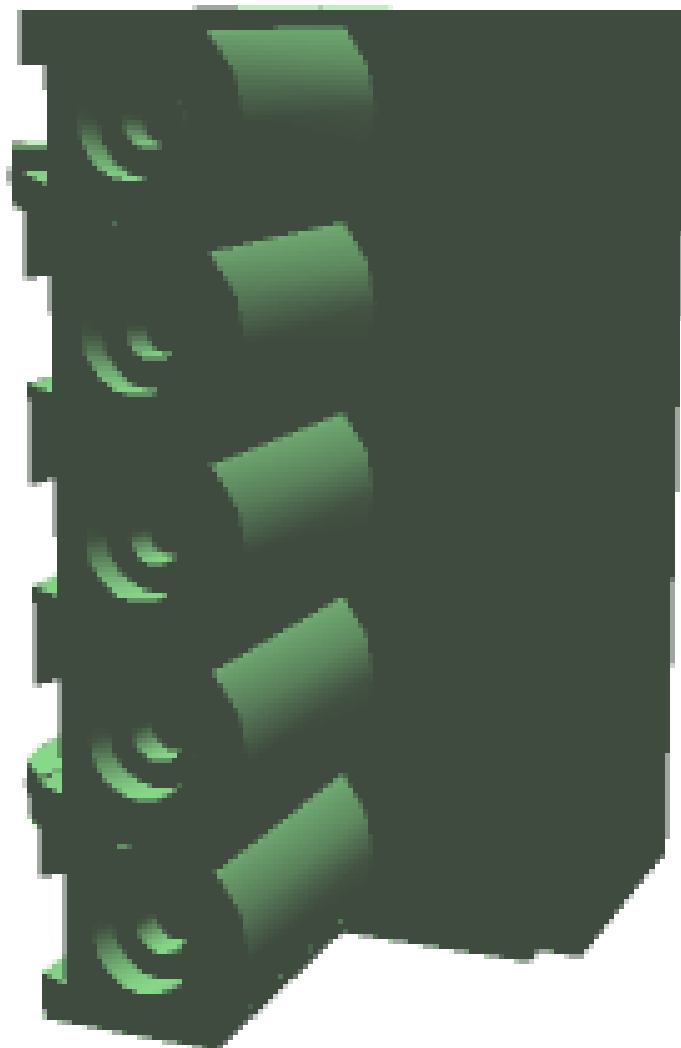

1781014 MSTBT 2,5/ 5-ST-5,08**5 item properties**

Order No.	1781014
Type	MSTBT 2,5/ 5-ST-5,08
Type of contact	Female connector
Range of articles	MSTBT 2,5/..-ST
Pitch	5.08 mm
Number of positions	5
Connection method	Screw connection with tension sleeve
Drive form screw head	Slotted
Screw thread	M3
Tightening torque	0.5 Nm ... 0.6 Nm
Locking	without

5.1 Connection capacity

Conductor cross section, solid	0.2 mm ² to 2.5 mm ²
Conductor cross section, flexible	0.2 mm ² to 2.5 mm ²
Conductor cross section AWG/kcmil	24 to 12
2 conductors with same cross section, solid	0.2 mm ² to 1 mm ²
2 conductors with same cross section, stranded	0.2 mm ² to 1.5 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm ² to 2.5 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve	0.25 mm ² to 2.5 mm ²
2 conductors with same cross section, stranded, with ferrule without plastic sleeve	0.25 mm ² to 1 mm ²
2 conductors with same cross section, stranded, with TWIN ferrules with plastic sleeve	0.5 mm ² to 1.5 mm ²
Cylindrical gauge a x b / diameter	2.8 mm x 2.0 mm / 2.4 mm
Stripping length	7 mm

5.2 Material data

Material of metal parts	
Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Terminal point surface	Sn 5 µm ... 7 µm
Surface contact area	Sn 5 µm ... 7 µm
Surface characteristics	hot-dip tin-plated
Insulating material data	
Insulating material	PA
CTI according to IEC 60112	600
Flammability rating according to UL 94	V0
Color	green (6021)
Glow wire flammability index GWFI according to EN 60695-2-12	850
Glow wire ignition temperature GWIT according to EN 60695-2-13	775
Temperature for the ball pressure test according to EN 60695-10-2	125 °C

6 Dimensions

1781014 MSTBT 2,5/ 5-ST-5,08

6.1 Dimensions for the product

Length	18.2 mm
Width	25.4 mm
Total height	15 mm
Dimension a	20.32 mm

1781014 MSTBT 2,5/ 5-ST-5,08**8 Packaging information**

Type of packaging	packed in cardboard
Pieces per package	100

9 Application**9.1 Temperature limit values**

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C (dependent on the derating curve)

1781014 MSTBT 2,5/ 5-ST-5,08**10 Mechanical tests**

Mechanical test group A	
Specification	IEC 61984:2008-10
Visual test	Test passed
Specification	IEC 60512-1-1:2002-02
Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02
Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12
Insertion and withdrawal force	Test passed
Specification	IEC 60512-13-2:2006-02
No. of cycles	25
Insertion strength per pos. approx.	8 N
Withdraw strength per pos. approx.	6 N
Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N
Contact retention in insert	Test passed
Specification	IEC 60512-15-1:2008-05
Test force per pos.	36 N

10.1 Termination and connection method

Specification	IEC 60999-1:1999-11
Check for damage to conductor or loosening	Test passed

10.2 Pull-out test

Termination and connection method: pull-out test	
Specification	IEC 60999-1:1999-11
Result	Test passed
Conductor cross section/conductor type/tractive force actual value	0.2 mm ² / solid / > 10 N
Conductor cross section/conductor type/tractive force actual value	0.2 mm ² / stranded / > 10 N
Conductor cross section/conductor type/tractive force actual value	2.5 mm ² / solid / > 50 N
Conductor cross section/conductor type/tractive force actual value	2.5 mm ² / stranded / > 50 N

1781014 MSTBT 2,5/ 5-ST-5,08**11 Electrical tests****11.1 Electrical data**

Rated current / conductor cross section	12 A / 2.5 mm ²
Rated insulation voltage (III/2)	320 V
Rated surge voltage (III/2)	4 kV
Contact resistance	1.3 mΩ
Degree of pollution	2

11.2 Air and creepage distances


Component	Plug component		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	I		
Comparative tracking index (IEC 60112:2003-01)	CTI 600		
Rated insulation voltage	250 V	320 V	630 V
Rated surge voltage	4 kV	4 kV	4 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	3 mm	3 mm	3 mm
Minimum value of the creepage path requirement in acc. with table	3.2 mm	3 mm	3.2 mm

1781014 MSTBT 2,5/ 5-ST-5,08


12 Current carrying capacity/derating curves

Specification	IEC 61984:2008-10
Note	Representation based on IEC 60512-5-2:2002-02
Reduction factor	0.8
Number of positions	See diagram
Conductor cross section	2.5 mm ²


Type: MSTBT 2,5/...-ST-5,08 with CC 2,5/...-G-5,08 P26THR

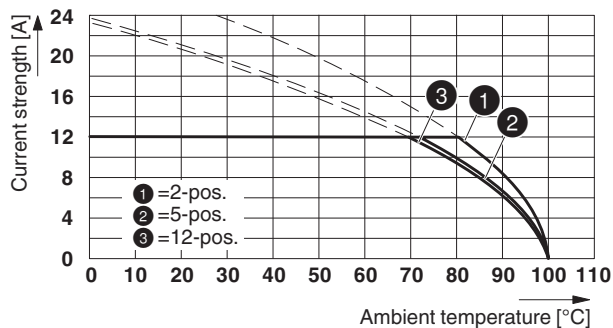

Type: MSTBT 2,5/...-ST-5,08 with CCA 2,5/...-G-5,08 P26 THR

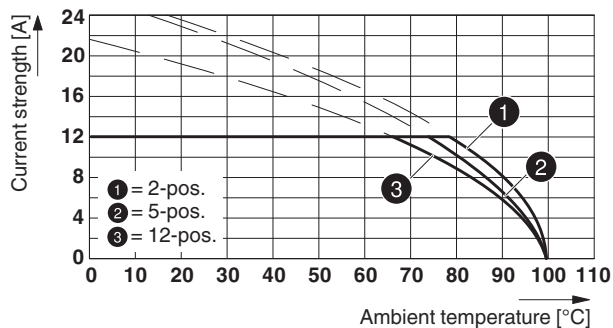


Type: MSTBT 2,5/...-ST-5,08 with CCV 2,5/...-G-5,08 P26THR

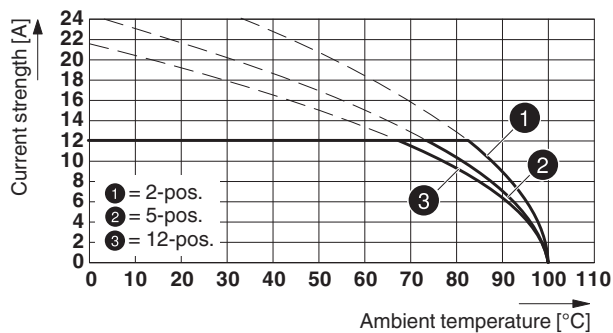


1781014 MSTBT 2,5/ 5-ST-5,08


Type: MSTBT 2,5/...-ST-5,08 with CCVA 2,5/...-G-5,08 P26 THR

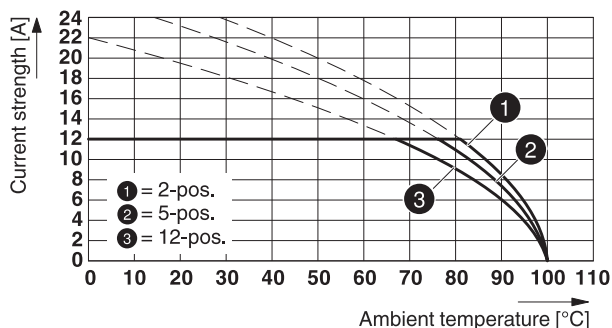


Type: MSTBT 2,5/...-ST-5,08 with MDSTB 2,5/...-G-5,08

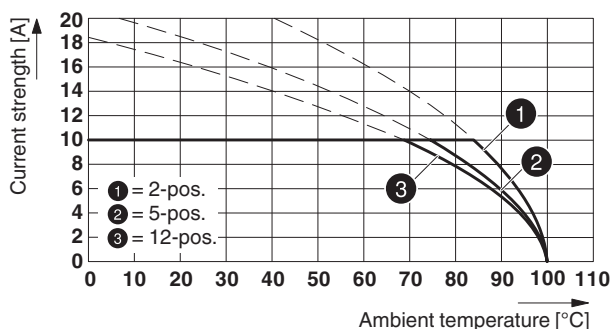

Type: MSTBT 2,5/...-ST-5,08 with MDSTBA 2,5/...-G-5,08

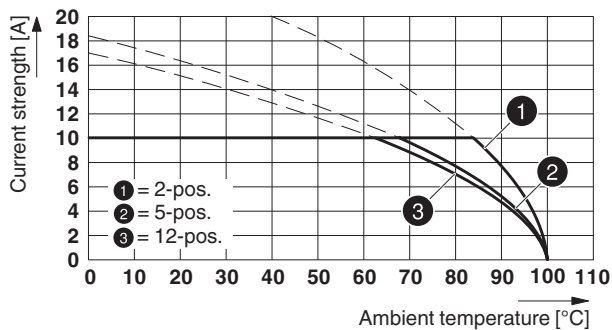


Type: MSTBT 2,5/...-ST-5,08 with MDSTBV 2,5/...-G-5,08

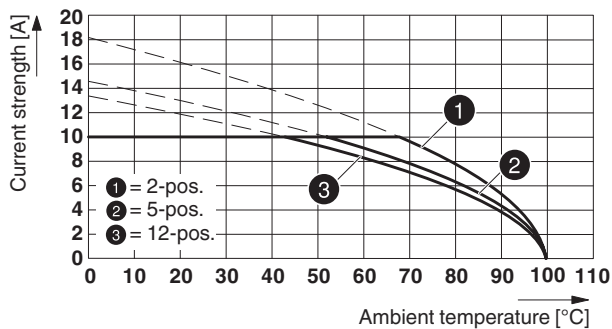


1781014 MSTBT 2,5/ 5-ST-5,08

Type: MSTBT 2,5/...-ST-5,08 with MDSTBVA 2,5/...-G-5,08

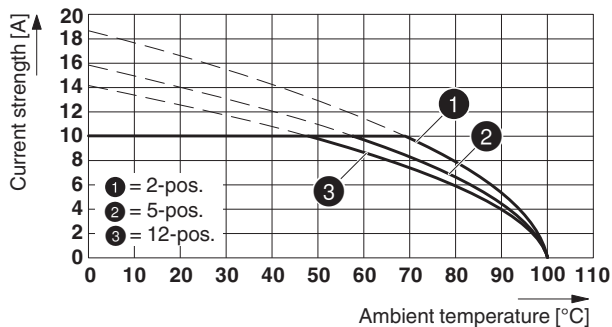

Type: MSTBT 2,5/...-ST-5,08 with MDSTBW 2,5/...-G-5,08

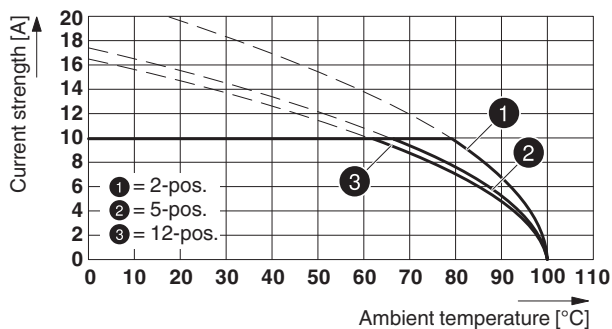

Type: MSTBT 2,5/...-ST-5,08 with MSTBW 2,5/...-G-5,08

87263_1000_en

Type: MSTBT 2,5/...-ST-5,08 with MSTBV 2,5/...-G-5,08-5,08

87688_1000_en

Type: MSTBT 2,5/...-ST-5,08 with MSTBA 2,5/...-G-5,08-5,08

87720_1000_en


1781014 MSTBT 2,5/ 5-ST-5,08**13 Environmental and durability tests****13.1 Vibration test**

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis


14 Classification for connectors


Specification	IEC 61984:2008-10
Main features	Connectors without switching capacity (COC)
Construction form	Fixed connectors
Strain relief elements	without strain relief
Connection method	Can be reconnected
Protection against electric shock	Not encapsulated - touch-proof when inserted
Protective conductor	without PE
Lock	no
Connection method	Screw terminal points

15 Approvals

CSA 				
Use group	B	D		
mm ² /AWG/kcmil	28-12	28-12		
Voltage	300 V	300 V		
Current	10 A	10 A		

VDE Gutachten mit Fertigungsüberwachung 				
mm ² /AWG/kcmil	0.2-2.5			
Voltage	250 V			
Current	12 A			

IECEE CB Scheme 				
mm ² /AWG/kcmil	0.2-2.5			
Voltage	250 V			
Current	12 A			

cULus Recognized 				
Use group	B	D		
mm ² /AWG/kcmil	30-12	30-12		
Voltage	300 V	300 V		
Current	15 A	10 A		

2017-10-23

Product version 04

Document revision 0

1781014 MSTBT 2,5/ 5-ST-5,08

EAC ERL

1781014 MSTBT 2,5/ 5-ST-5,08**16 Commercial Data**

Order No.	1781014
Type	MSTBT 2,5/ 5-ST-5,08
Pieces per package	100
Net weight	8.276 g
GTIN	4017918040956
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

17 corresponding headers

Order No.	Type
1735853	MSTBW 2,5/ 5-G-5,08
1755765	MSTBVA 2,5/ 5-G-5,08
1757271	MSTBA 2,5/ 5-G-5,08
1758047	MSTBV 2,5/ 5-G-5,08
1759046	MSTB 2,5/ 5-G-5,08
1762004	MDSTBV 2,5/ 5-G-5,08
1767407	SMSTBA 2,5/ 5-G-5,08
1769492	SMSTB 2,5/ 5-G-5,08
1770973	MSTBA 2,5/ 5-G-5,08-LA
1840010	MDSTBW 2,5/ 5-G-5,08
1842092	MDSTBA 2,5/ 5-G-5,08
1845361	MDSTBVA 2,5/ 5-G-5,08
1847136	MSTBO 2,5/ 5-GR-5,08
1850466	MSTBO 2,5/ 5-GL-5,08
1859548	EMSTBVA 2,5/ 5-G-5,08
1880339	EMSTBA 2,5/ 5-G-5,08
1898868	DFK-MSTBA 2,5/ 5-G-5,08
1899168	DFK-MSTBVA 2,5/ 5-G-5,08
1902770	MSTBA 2,5/ 5-G-5,08 THT
1902848	MSTBVA 2,5/ 5-G-5,08 THT
1937266	MSTBA 2,5/ 5-G-5,08 THT-R56
1940444	MSTBVA 2,5/ 5-G-5,08 THT-R56
1954414	CC 2,5/ 5-G-5,08 P26THR
1954618	CC 2,5/ 5-G-5,08 P26THRR56
1954948	CCA 2,5/ 5-G-5,08 P26THR
1955060	CCA 2,5/ 5-G-5,08 P26THRR56
1955413	CCV 2,5/ 5-G-5,08 P26THR
1955552	CCV 2,5/ 5-G-5,08 P26THRR56
1955882	CCVA 2,5/ 5-G-5,08 P26THR
1955992	CCVA 2,5/ 5-G-5,08 P26THRR56

18 Accessories

Description	Order No.	Type
Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip	1205053	SZS 0,6X3,5
	0804293	SK 5,08/3,8:FORTL.ZAHLEN
	1803934	KGG-MSTB 2,5/ 2

2017-10-23

Product version 04




Document revision 0

1781014 MSTBT 2,5/ 5-ST-5,08

Description	Order No.	Type
	1783779	KGS-MSTB 2,5/ 8
Coding profile, is inserted into the slot on the plug or inverted header, red insulating material	1734634	CP-MSTB
Insertion bridge, fully insulated, for connectors with 5.0 or 5.08 mm pitch, no. of positions: 2	1733169	EBP 2- 5

1781014 MSTBT 2,5/ 5-ST-5,08

19 Combination tests

**MSTBT 2,5/...-ST**

Specification

CC 2,5/...-G

IEC 61984

CCA 2,5/...-G

IEC 61984

CCV 2,5/...-G

IEC 61984

CCVA 2,5/...-G

IEC 61984

Mechanical tests (A)

Insertion/withdrawal force per position

approx. 8 N / 6 N

approx. 8 N / 6 N

approx. 8 N / 6 N

approx. 8 N / 6 N

Polarization when inserted
Requirement >20 N

Test passed

Test passed

Test passed

Test passed

Contact holder in insert
Requirements >20 N

Test passed

Test passed

Test passed

Test passed

Durability tests (B)Contact resistance R_1 1.3 m Ω 1.3 m Ω 1.4 m Ω 1.2 m Ω

Insertion/withdrawal cycles

25

25

25

25

Contact resistance R_2 1.3 m Ω 1.3 m Ω 1.3 m Ω 1.3 m Ω Rated impulse voltage at sea level
Voltage waveform $\geq (1.2/50 \mu\text{s})$

4.8 kV

4.8 kV

4.8 kV

4.8 kV

Power-frequency withstand voltage
Voltage waveform $\geq (50/60 \text{ Hz})$

2.21 kV

2.21 kV

2.21 kV

2.21 kV

Insulation resistance
Requirements > 5 M Ω > 0.2 T Ω > 2 T Ω > 0.2 T Ω > 2 T Ω **Thermal tests (C)**

Tested number of positions

12

12

12

12

Tested conductor cross section

2.5 mm²2.5 mm²2.5 mm²2.5 mm²

Test current

12 A

12 A DC

12 A

12 A DC

Upper limiting temperature
Requirements < 100°C

Test passed

Test passed

Test passed

Test passed

Climatic tests (D)

Test sequence 1: low temperature storage

-40 °C/2 h

-40 °C/2 h

-40 °C/2 h

-40 °C/2 h

Test sequence 2: heat storage

100 °C/168 h

100 °C/168 h

100 °C/168 h

100 °C/168 h

Test sequence 3: noxious gas storage
(ISO 6988)0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycleRated impulse voltage at sea level
Voltage waveform $\geq (1.2/50 \mu\text{s})$

4.8 kV

4.8 kV

4.8 kV

4.8 kV

Power-frequency withstand voltage
Voltage waveform $\geq (50/60 \text{ Hz})$

2.21 kV

2.21 kV

2.21 kV

2.21 kV

Environmental and endurance tests (E)

Specification

IEC 61984:2008-10

IEC 61984:2008-10




IEC 61984:2008-10

IEC 61984:2008-10

Degree of protection

Finger safety with IP20
test fingerFinger safety with IP20
test fingerFinger safety with IP20
test fingerFinger safety with IP20
test finger

1781014 MSTBT 2,5/ 5-ST-5,08



MSTBT 2,5/...-ST

MSTBVA 2,5/...-G


MDSTB 2,5/...-G

MDSTBA 2,5/...-G

MDSTBV 2,5/...-G

Specification	IEC 61984	IEC 61984	IEC 61984	IEC 61984
Mechanical tests (A)				
Insertion/withdrawal force per position		approx. 8 N / 6 N	approx. 8 N / 6 N	approx. 8 N / 6 N
Polarization when inserted Requirement >20 N		Test passed	Test passed	Test passed
Contact holder in insert Requirements >20 N		Test passed	Test passed	Test passed
Durability tests (B)				
Insertion/withdrawal cycles		25	25	25
Rated impulse voltage at sea level Voltage waveform $\geq (1.2/50 \mu s)$		4.8 kV	4.8 kV	4.8 kV
Power-frequency withstand voltage Voltage waveform $\geq (50/60 \text{ Hz})$		2.21 kV	2.21 kV	2.21 kV
Insulation resistance Requirements > 5 M Ω		> 20 G Ω	> 80 G Ω	> 20 G Ω
Thermal tests (C)				
Tested number of positions		12	12	12
Tested conductor cross section		2.5 mm ²	2.5 mm ²	2.5 mm ²
Test current		10 A	10 A	10 A
Upper limiting temperature Requirements < 100°C		Test passed	Test passed	Test passed
Climatic tests (D)				
Test sequence 1: low temperature storage		-40 °C/2 h	-40 °C/2 h	-40 °C/2 h
Test sequence 2: heat storage		100 °C/168 h	100 °C/168 h	100 °C/168 h
Test sequence 3: noxious gas storage (ISO 6988)		0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle
Rated impulse voltage at sea level Voltage waveform $\geq (1.2/50 \mu s)$		4.8 kV	4.8 kV	4.8 kV
Power-frequency withstand voltage Voltage waveform $\geq (50/60 \text{ Hz})$		2.21 kV	2.21 kV	2.21 kV
Environmental and endurance tests (E)				
Specification		IEC 61984:2008-10	IEC 61984:2008-10	IEC 61984:2008-10
Degree of protection		Finger safety with IP20 test finger	Finger safety with IP20 test finger	Finger safety with IP20 test finger

1781014 MSTBT 2,5/ 5-ST-5,08



MSTBT 2,5/..-ST




MDSTBVA 2,5/..-G



MDSTBW 2,5/..-G






DFK-MSTBA 2,5/..-G



MSTBW 2,5/..-G

Specification	IEC 61984	IEC 61984	IEC 61984	IEC 61984
Mechanical tests (A)				
Insertion/withdrawal force per position	approx. 8 N / 6 N	approx. 8 N / 6 N		approx. 8 N / 6 N
Polarization when inserted Requirement >20 N	Test passed	Test passed		Test passed
Contact holder in insert Requirements >20 N	Test passed	Test passed		Test passed
Durability tests (B)				
Contact resistance R ₁	2.4 mΩ	1.7 mΩ		1.3 mΩ
Insertion/withdrawal cycles	25	25		25
Contact resistance R ₂	2.4 mΩ	1.7 mΩ		1.3 mΩ
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)	4.8 kV	4.8 kV		4.8 kV
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	2.21 kV	2.21 kV		2.21 kV
Insulation resistance Requirements > 5 MΩ	> 0.3 TΩ	> 50 GΩ		> 0.2 TΩ
Thermal tests (C)				
Tested number of positions	12	12		18
Tested conductor cross section	2.5 mm ²	2.5 mm ²		2.5 mm ²
Test current	10 A	10 A		
Upper limiting temperature Requirements < 100°C	Test passed	Test passed		Test passed
Climatic tests (D)				
Test sequence 1: low temperature storage	-40 °C/2 h	-40 °C/2 h		-40 °C/2 h
Test sequence 2: heat storage	100 °C/168 h	100 °C/168 h		100 °C/168 h
Test sequence 3: noxious gas storage (ISO 6988)	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle		0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)	4.8 kV	4.8 kV		4.8 kV
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	2.21 kV	2.21 kV		2.21 kV
Environmental and endurance tests (E)				
Specification	IEC 61984:2008-10	IEC 61984:2008-10		IEC 61984:2008-10
Degree of protection	Finger safety with IP20 test finger	Finger safety with IP20 test finger		Finger safety with IP20 test finger

1781014 MSTBT 2,5/ 5-ST-5,08



MSTBT 2,5/..-ST

MSTBV 2,5/..-G

MSTBA 2,5/..-G

Specification

IEC 61984

IEC 61984

Mechanical tests (A)

Insertion/withdrawal force per position

approx. 8 N / 6 N

approx. 8 N / 6 N

Polarization when inserted
Requirement >20 N

Test passed

Test passed

Contact holder in insert
Requirements >20 N

Test passed

Test passed

Durability tests (B)

Contact resistance R₁

2.4 mΩ

1.2 mΩ

Insertion/withdrawal cycles

25

25

Contact resistance R₂

2.5 mΩ

1.2 mΩ

Rated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)

4.8 kV

4.8 kV

Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)

2.21 kV

2.21 kV

Insulation resistance
Requirements > 5 MΩ

> 0.2 TΩ

> 0.2 TΩ

Thermal tests (C)

Tested number of positions

18

18

Tested conductor cross section

2.5 mm²

2.5 mm²

Test current

Upper limiting temperature
Requirements < 100°C

Test passed

Test passed

Climatic tests (D)

Test sequence 1: low temperature storage

-40 °C/2 h

-40 °C/2 h

Test sequence 2: heat storage

100 °C/168 h

100 °C/168 h

Test sequence 3: noxious gas storage
(ISO 6988)

0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle

0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle

Rated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)

4.8 kV

4.8 kV

Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)

2.21 kV

2.21 kV

Environmental and endurance tests (E)

Specification

IEC 61984:2008-10

IEC 61984:2008-10

Degree of protection

Finger safety with IP20
test finger

Finger safety with IP20
test finger



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk