


Data sheet

Order No.: 1940114

Type: FK-MCP 1,5/ 4-STF-3,5

Plug component, Push-in spring connection

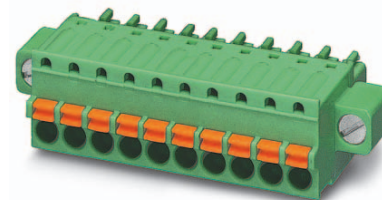

The figure shows a 10-position version of the product

1 Main features



- | | | | |
|---------------------------|---------------------------|------------------------|---------------------|
| • No. of pos. | 4 | • Nominal current | 8 A |
| • Conductor cross section | 1.5 mm ² | • Nominal voltage | 160 V |
| • Color | green | • Connection direction | 0 ° |
| • Pitch | 3.5 mm | • Type of packaging | packed in cardboard |
| • Connection method | Push-in spring connection | | |

2 Your advantages

- ✓ Time saving push-in connection, tools not required
- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ Intuitive use through colour coded actuation lever
- ✓ Screwable flange for superior mechanical stability
- ✓ Quick and convenient testing using integrated test option



Make sure you always use the latest documentation.


It can be downloaded at: phoenixcontact.net/product/1940114

1940114 FK-MCP 1,5/ 4-STF-3,5**3 Table of contents**

1	Main features.....	1
2	Your advantages	1
3	Table of contents	2
4	3D model in PDF can be activated (Acrobat Reader only).....	3
5	item properties.....	4
	5.1 Connection capacity	4
	5.2 Material data	4
6	Dimensions.....	4
	6.1 Dimensions for the product	4
7	Series drawing.....	5
8	Packaging information	5
9	Application.....	5
	9.1 Temperature limit values	5
10	Mechanical tests.....	6
	10.1 Termination and connection method.....	6
	10.2 Pull-out test	6
11	Electrical tests	7
	11.1 Electrical data	7
	11.2 Air and creepage distances	7
	11.3 Electrical function	7
	11.4 Temperature cycles.....	7
12	Current carrying capacity/derating curves	8
13	Environmental and durability tests	9
	13.1 Vibration test	9
14	Classification for connectors.....	9
15	Approvals	9
16	Commercial Data.....	10
17	corresponding headers.....	10
18	Accessories.....	10
19	Combination tests.....	11

1940114 FK-MCP 1,5/ 4-STF-3,5

4 3D model in PDF can be activated (Acrobat Reader only)

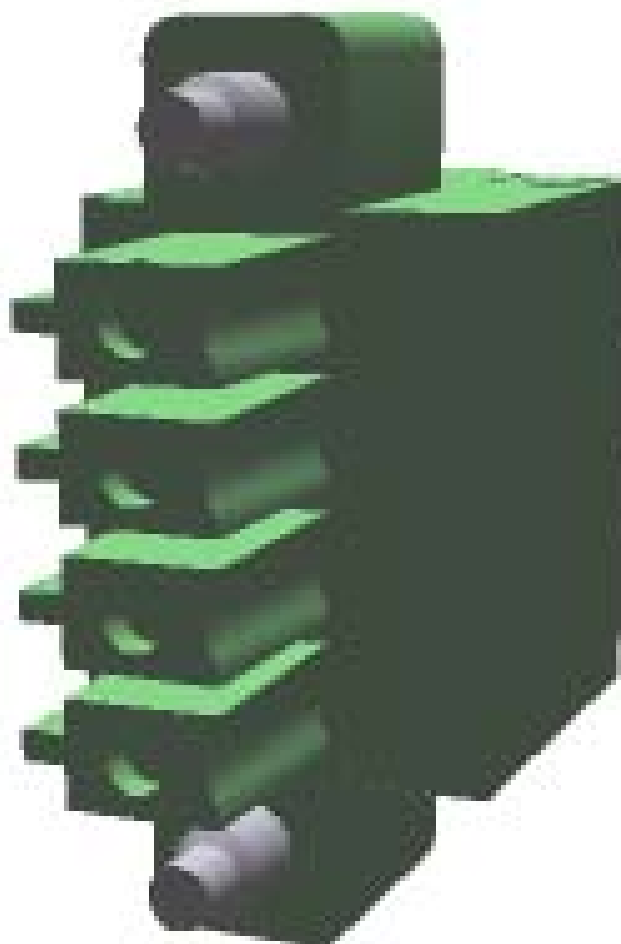

1940114 FK-MCP 1,5/ 4-STF-3,5**5 item properties**

Order No.	1940114
Type	FK-MCP 1,5/ 4-STF-3,5
Type of contact	Female connector
Range of articles	FK-MCP 1,5/-STF
Pitch	3.5 mm
Number of positions	4
Connection method	Push-in spring connection
Locking	Screw flange

5.1 Connection capacity

Conductor cross section, solid	0.14 mm ² to 1.5 mm ²
Conductor cross section, flexible	0.14 mm ² to 1.5 mm ²
Conductor cross section AWG/kcmil	26 to 16
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm ² to 1.5 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve	0.25 mm ² to 0.5 mm ²
Cylindrical gauge a x b / diameter	2.0 mm x 1.2 mm / -
Stripping length	9 mm

5.2 Material data

Material of metal parts		
Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201	
Contact material	Cu alloy	
Terminal point surface	Sn 4 µm ... 8 µm	
Surface contact area	Sn 4 µm ... 8 µm	
Surface characteristics	hot-dip tin-plated	
Insulating material data	Housing	Actuation element
Insulating material	PA	POM
CTI according to IEC 60112	600	600
Flammability rating according to UL 94	V0	HB
Color	green (6021)	orange (2003)
Glow wire flammability index GWFI according to EN 60695-2-12	850	
Glow wire ignition temperature GWIT according to EN 60695-2-13	775	
Temperature for the ball pressure test according to EN 60695-10-2	125 °C	

6 Dimensions**6.1 Dimensions for the product**

Length	20.8 mm
Width	24.3 mm
Total height	12.4 mm
Dimension a	10.5 mm

1940114 FK-MCP 1,5/ 4-STF-3,5**7 Series drawing****8 Packaging information**

Type of packaging	packed in cardboard
Pieces per package	50
Outer packaging type	Carton

9 Application**9.1 Temperature limit values**

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C (dependent on the derating curve)

1940114 FK-MCP 1,5/ 4-STF-3,5**10 Mechanical tests**

Mechanical test group A	
Specification	IEC 61984:2008-10
Visual test	Test passed
Specification	IEC 60512-1-1:2002-02
Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02
Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12
Insertion and withdrawal force	Test passed
Specification	IEC 60512-13-2:2006-02
No. of cycles	25
Insertion strength per pos. approx.	7 N
Withdraw strength per pos. approx.	5 N
Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N
Contact retention in insert	Test passed
Specification	IEC 60512-15-1:2008-05
Test force per pos.	26 N

10.1 Termination and connection method

Specification	IEC 60999-1:1999-11
Conductor connection	Test passed
Repeated connection and disconnection	Test passed
Check for damage to conductor or loosening	Test passed

10.2 Pull-out test

Termination and connection method: pull-out test	
Specification	IEC 60999-1:1999-11
Result	Test passed
Conductor cross section/conductor type/tractive force actual value	0.14 mm ² / solid / > 10 N
Conductor cross section/conductor type/tractive force actual value	0.14 mm ² / stranded / > 10 N
Conductor cross section/conductor type/tractive force actual value	1.5 mm ² / solid / > 40 N
Conductor cross section/conductor type/tractive force actual value	1.5 mm ² / stranded / > 40 N
Conductor cross section/conductor type/tractive force actual value	AWG 26 / stranded / > 10 N

1940114 FK-MCP 1,5/ 4-STF-3,5**11 Electrical tests****11.1 Electrical data**

Rated current / conductor cross section	8 A / 1.5 mm ²
Rated insulation voltage (III/2)	160 V
Rated surge voltage (III/2)	2.5 kV
Contact resistance	2 mΩ
Degree of pollution	2

11.2 Air and creepage distances

Component	Plug component		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	I		
Comparative tracking index (IEC 60112:2003-01)	CTI 600		
Rated insulation voltage	160 V	160 V	320 V
Rated surge voltage	2.5 kV	2.5 kV	2.5 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	1.5 mm	1.5 mm	1.5 mm
Minimum value of the creepage path requirement in acc. with table	2 mm	1.5 mm	1.6 mm

11.3 Electrical function

Specification	IEC 60999-1:1999-11
Result	Test passed
Voltage drop	Voltage drop (U) after the load ≤ 15 mV
Test current (minimum cross section)	4 A DC
Test current (maximum cross section)	8 A DC
Conductor cross section, flexible	0.14 mm ² to 1.5 mm ²
Conductor cross section, solid	0.14 mm ² to 1.5 mm ²

11.4 Temperature cycles


Specification	IEC 60999-1:1999-11
Result	Test passed
Voltage drop	Voltage drop (U) after the load ≤ 22.5 mV or 1.5 x U _{after 24 h} The small value is to be used.
Test current (minimum cross section)	4 A DC
Test current (maximum cross section)	8 A DC
Temperature cycles	192
Conductor cross section, flexible	0.14 mm ² to 1.5 mm ²
Conductor cross section, solid	0.14 mm ² to 1.5 mm ²

1940114 FK-MCP 1,5/ 4-STF-3,5

12 Current carrying capacity/derating curves

Specification	IEC 61984:2008-10
Note	Representation based on IEC 60512-5-2:2002-02
Reduction factor	0.8
Number of positions	See diagram
Conductor cross section	1.5 mm ²

Type: FK-MCP 1,5/...-STF-3,5 with MC 1,5/...-GF-3,5

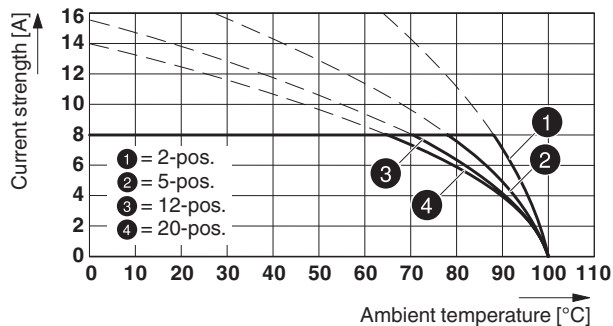

Type: FK-MCP 1,5/...-STF-3,5 with MCV 1,5/...-GF-3,5 P...THR

90710_1000_en





1940114 FK-MCP 1,5/ 4-STF-3,5**13 Environmental and durability tests****13.1 Vibration test**

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis

14 Classification for connectors

Specification	IEC 61984:2008-10
Main features	Connectors without switching capacity (COC)
Construction form	Fixed connectors
Strain relief elements	without strain relief
Connection method	Can be reconnected
Protection against electric shock	Not encapsulated - touch-proof when inserted
Protective conductor	without PE
Lock	no
Connection method	Screwless terminal points

15 Approvals

VDE Gutachten mit Fertigungsüberwachung 	
mm ² /AWG/kcmil	0.2-1.5
Voltage	160 V
Current	8 A
IECEE CB Scheme 	
mm ² /AWG/kcmil	0.2-1.5
Voltage	160 V
Current	8 A
CCA	
mm ² /AWG/kcmil	0.2-1.5
Voltage	160 V
Current	8 A
cULus Recognized 	
Use group	B
mm ² /AWG/kcmil	28-16
Voltage	300 V
Current	8 A
EAC 	

1940114 FK-MCP 1,5/ 4-STF-3,5**16 Commercial Data**

Order No.	1940114
Type	FK-MCP 1,5/ 4-STF-3,5
Pieces per package	50
Net weight	4.281 g
GTIN	4017918877378
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

17 corresponding headers


Order No.	Type
1780707	MCV 1,5/ 4-GF-3,5 P20 THRR56
1789203	MC 1,5/ 4-GF-3,5 P26 THR
1789216	MC 1,5/ 4-GF-3,5 P26 THRR56
1789436	MC 1,5/ 4-GF-3,5 P20 THRR56
1789643	MC 1,5/ 4-GF-3,5 P14 THR
1789656	MC 1,5/ 4-GF-3,5 P14 THRR56
1843240	MCV 1,5/ 4-GF-3,5
1843813	MC 1,5/ 4-GF-3,5
1897267	EMC 1,5/ 4-GF-3,5
1911185	EMCV 1,5/ 4-GF-3,5

18 Accessories


Description	Order No.	Type
Screwdriver, slot-headed, VDE insulated, size: 0.4 x 2.5 x 80 mm, 2-component grip, with non-slip grip	1205037	SZS 0,4X2,5 VDE
	0803883	SK U/2,8 WH:UNBEDRUCKT
	0804073	SK 3,5/2,8:FORTL.ZAHLEN
	1944372	MPS-MT 1-S
Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm ² ... 6.0 mm ² , lateral entry, trapezoidal crimp	1212034	CRIMPFOX 6

1940114 FK-MCP 1,5/ 4-STF-3,5

19 Combination tests



FK-MCP 1,5/...-STF



MC 1,5/...-GF



MCV 1,5/...-GF-THR

Specification	IEC 61984	IEC 61984		
Mechanical tests (A)				
Insertion/withdrawal force per position	approx. 7 N / 5 N	approx. 16 N / 12 N		
Polarization when inserted Requirement >20 N	Test passed	Test passed		
Contact holder in insert Requirements >20 N	Test passed	Test passed		
Durability tests (B)				
Contact resistance R ₁	2 mΩ	1.4 mΩ		
Insertion/withdrawal cycles	25	25		
Contact resistance R ₂	2.2 mΩ	1.4 mΩ		
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)	2.95 kV	2.95 kV		
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	1.39 kV	1.39 kV		
Insulation resistance Requirements > 5 MΩ	10 ¹² Ω	> 0.2 TΩ		
Thermal tests (C)				
Tested number of positions	20	12		
Tested conductor cross section	1.5 mm ²	1.5 mm ²		
Test current	8 A DC	8 A		
Upper limiting temperature Requirements < 100°C	Test passed	Test passed		
Climatic tests (D)				
Test sequence 1: low temperature storage	-40 °C/2 h	-40 °C/2 h		
Test sequence 2: heat storage	100 °C/168 h	100 °C/168 h		
Test sequence 3: noxious gas storage (ISO 6988)	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle		
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)	2.95 kV	2.95 kV		
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	1.39 kV	1.39 kV		
Environmental and endurance tests (E)				
Specification	IEC 61984:2008-10	IEC 61984:2008-10		
Degree of protection	Finger safety with IP20 test finger	Finger safety with IP20 test finger		



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk