

Surge protection device - CN-LAMBDA/4-2.2-BB - 2800024

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Attachment plug with Lambda/4 technology as surge protection for coaxial signal interfaces. Connection: N connectors socket-socket

Your advantages

- Maintenance-free surge protection with LAMBDA/4 technology
- Low protection level
- High HF power in the kW range



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 367967
GTIN	4046356367967
Weight per Piece (excluding packing)	191.000 g
Custom tariff number	85363010
Country of origin	United States
Note	Made to Order (non-returnable)

Technical data

Dimensions

Height	66 mm
Width	26.1 mm
Depth	83 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 90 °C
Degree of protection	IP68

General

Housing material	Brass (CuZn)
------------------	--------------

Surge protection device - CN-LAMBDA/4-2.2-BB - 2800024

Technical data

General

Color	nickel
Mounting type	Connection-specific intermediate plugging
Type	Attachment plug
Direction of action	Line-Shield/Earth Ground

Protective circuit

IEC test classification	C2
	C3
	D1
VDE requirement class	C2
	C3
	D1
Nominal current I_N	5 A (25 °C)
Nominal discharge current I_n (8/20) μ s (line-earth)	50 kA
Nominal discharge current I_n (8/20) μ s (line-shield)	50 kA
Total surge current (8/20) μ s	60 kA
Total surge current (10/350) μ s	20 kA
Max. discharge current I_{max} (8/20) μ s maximum (line-earth)	60 kA
Max. discharge current I_{max} (8/20) μ s maximum (line-shield)	60 kA
Impulse discharge current (10/350) μ s, peak value I_{imp}	≤ 20 kA
Output voltage limitation at 1 kV/ μ s (line-earth) spike	≤ 12 V (6 kV / 3 kA)
Output voltage limitation at 1 kV/ μ s (line-shield) spike	≤ 12 V (6 kV / 3 kA)
Output voltage limitation at 1 kV/ μ s (line-earth) static	≤ 12 V (6 kV / 3 kA)
Output voltage limitation at 1 kV/ μ s (line-shield) static	≤ 12 V (6 kV / 3 kA)
Voltage protection level U_p (line-earth)	≤ 12 V (6 kV / 3 kA)
Voltage protection level U_p (line-shield)	≤ 12 V (6 kV / 3 kA)
Input attenuation aE, asym.	typ. 0.05 dB (≤ 0.15 dB)
Frequency range	0.82 GHz ... 2.2 GHz
Standing wave ratio SWR in a 50 Ω system	typ. 1.1 (≤ 1.20 (0.82 GHz...2.2 GHz))
Permissible HF power P_{max} at VSWR = xx (50 ohm system)	≤ 500 W
	≤ 4 kW (peak)
Surge protection fault message	none
Impulse durability (line-earth)	C2 - 10 kV / 5 kA
	D1 - 2.5 kA
Impulse durability (line-shield)	C2 - 10 kV/5 kA
	D1 - 2.5 kA

Connection data

Connection method	N Connector
Connection method IN	N connector, female
Connection method OUT	N connector, female

Surge protection device - CN-LAMBDA/4-2.2-BB - 2800024


Technical data

Standards and Regulations

Standards/regulations	IEC 61643-21
Standards/specifications	IEC 61643-21 2005

Drawings

Circuit diagram

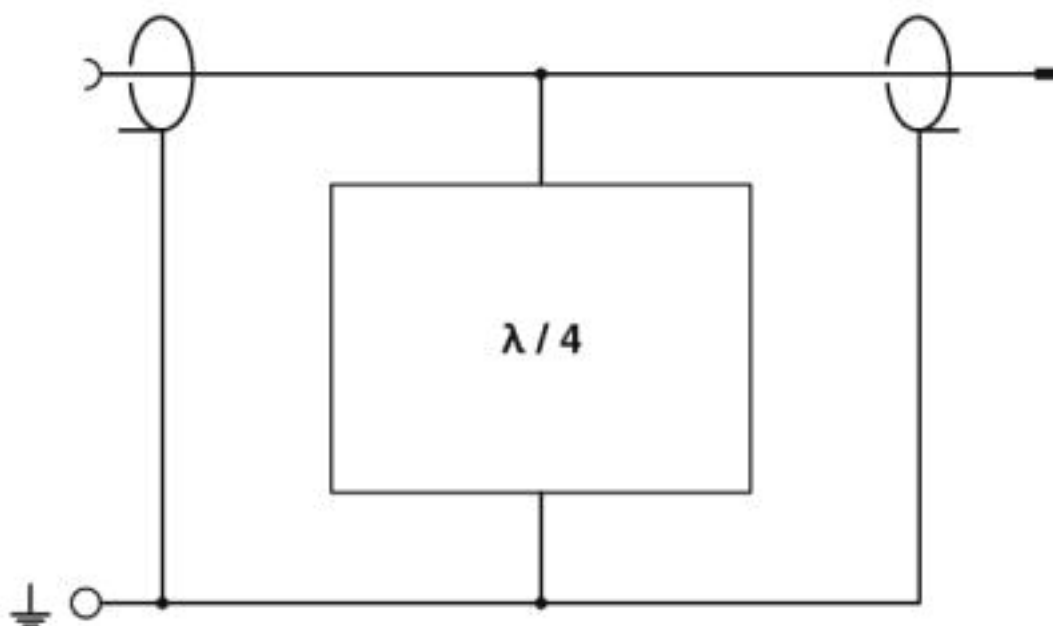

Classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130800
eCl@ss 6.0	27130800
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807
eCl@ss 9.0	27130807

ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943
ETIM 6.0	EC000943

<https://www.phoenixcontact.com/gb/products/2800024>



Surge protection device - CN-LAMBDA/4-2.2-BB - 2800024

Classifications

UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk