

## Controller - AXC F 2152 - 2404267

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PLCnext Control for the direct control of Axioline F I/Os. With two Ethernet interfaces. Complete with connector and bus base module.

### Product Description


The PLCnext AXC F 2152 controller for the Axioline I/O system is fast, robust and easy to use. It has been consistently designed for maximum performance, easy handling and use in harsh industrial environments.

### Your advantages

- ✓ PROFINET support
- ✓ Connection to PROFICLOUD
- ✓ Numerous protocols supported such as: http, https, FTP, SNMP, SMTP, SQL, MySQL, DCP, etc.
- ✓ Up to 63 AXIO I/O modules can be mounted side by side
- ✓ 2 x Ethernet interfaces (integrated switch)
- ✓ Increased resistance to EMI
- ✓ Extended temperature range of -25°C ... +60°C
- ✓ Linux operating system
- ✓ Supports high-level languages



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 356280
GTIN	4055626356280
Weight per Piece (excluding packing)	225.600 g
Custom tariff number	85371091
Country of origin	Germany

### Technical data

#### Note

# Controller - AXC F 2152 - 2404267

## Technical data

### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

### Dimensions

Width	45 mm
Height	126.93 mm
Depth	75 mm

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 60 °C up to 2000 m above mean sea level (observe derating)
	-25 °C ... 55 °C up to 3000 m above mean sea level (observe derating)
	≤ 55 °C (with max. 1 A on U <sub>Bus</sub> )
	> 55 °C ... 60 °C (only in conjunction with an Axioline F power module AXL F PWR 1H (order number 2688297))
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 % (according to DIN EN 61131-2)
Permissible humidity (storage/transport)	5 % ... 95 % (according to DIN EN 61131-2)
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	58 kPa ... 106 kPa (up to 4500 m above mean sea level)
Shock	30g, 11 ms period, half-sine shock pulse, according to IEC 60068-2-27
Vibration (operation)	5g

### Control system

Engineering tool	PLCnext Engineer
	Eclipse
Programming languages supported	Programming in acc. with IEC 61131-3
	C++
	C#
	Java
	Manufacturer-specific
Supports cloud computing	yes
Cloud platform	Proficloud

### General data

Processor	Arm® Cortex®-A9 2x 800 MHz
Operating system	Linux
RAM	512 Mbyte DDR3 SDRAM

### IEC 61131 runtime system

Engineering tool	PLCnext Engineer
	Eclipse
Program memory	8 Mbyte
Mass storage	16 Mbyte

<https://www.phoenixcontact.com/gb/products/2404267>

## Controller - AXC F 2152 - 2404267

### Technical data

#### IEC 61131 runtime system

Retentive mass storage	48 kByte (NVRAM)
Realtime clock	Yes

#### Fieldbus function

Designation	System limits of the controller
Amount of process data	max. 8192 Bit (per station)
	max. 4096 Bit (Input)
	max. 4096 Bit (Output)
Number of supported devices	max. 63 (per station)
Number of local bus devices that can be connected	max. 63 (observe current consumption)

#### Data interfaces

Interface	Axioline F local bus
Number	1
Connection method	Bus base module
Transmission speed	100 Mbps
Interface	Ethernet
Number	2
Connection method	RJ45 socket
Transmission speed	10/100 Mbps (full duplex)
Protocols supported	HTTP
	HTTPS
	SFTP
	SNTP
	SNMP
	IPsec
	syslog
	HTTP
	HTTPS
	SFTP
	SNTP
	SNMP
	IPsec
	syslog

#### PROFINET

Device function	PROFINET controller, PROFINET device
Specification	Version 2.3
Update rate	min. 1 ms (4 devices)
	min. 16 ms (64 devices)

#### Power supply

Typical current consumption	200 mA
-----------------------------	--------

## Controller - AXC F 2152 - 2404267

### Technical data

#### Power supply

Max. current consumption	442 mA
Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC
Residual ripple	± 5 %
Power dissipation	max. 10.6 W

#### Mechanical design

Weight	225.6 g
Diagnostics display	No
Controller redundancy	No
Safety function	No

#### Standards and Regulations

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Interference emission	Noise emission test as per EN 61000-6-4 Class A
Immunity to surge	Noise immunity test in accordance with EN 61000-6-2 Transient overvoltage (surge) EN 61000-4-5/IEC 61000-4-5 Criterion B, DC supply lines: ±0.5 kV/±0.5 kV (symmetrical/asymmetrical), fieldbus cable shield: ±1 kV
Immunity to burst	Noise immunity test in accordance with EN 61000-6-2 Fast transients (burst) EN 61000-4-4/IEC 61000-4-4 Criterion B, 2 kV
Immunity to EF	Noise immunity test in accordance with EN 61000-6-2 Electromagnetic fields EN 61000-4-3/IEC 61000-4-3 Criterion A, Field intensity: 10 V/m
Immunity to ESD	Noise immunity test in accordance with EN 61000-6-2 Electrostatic discharge (ESD) EN 61000-4-2/IEC 61000-4-2 Criterion B, 6 kV contact discharge, 8 kV air discharge
Immunity to conducted interference	Noise immunity test in accordance with EN 61000-6-2 Conducted interference EN 61000-4-6/IEC 61000-4-6 Criterion A, Test voltage 10 V
Vibration (storage/transport)	5g
Shock	30g, 11 ms period, half-sine shock pulse, according to IEC 60068-2-27
Vibration (operation)	5g
Shock (operation)	10g (Bump endurance test according to DIN EN 60068-2-27)


#### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

### Drawings

# Controller - AXC F 2152 - 2404267

Dimensional drawing

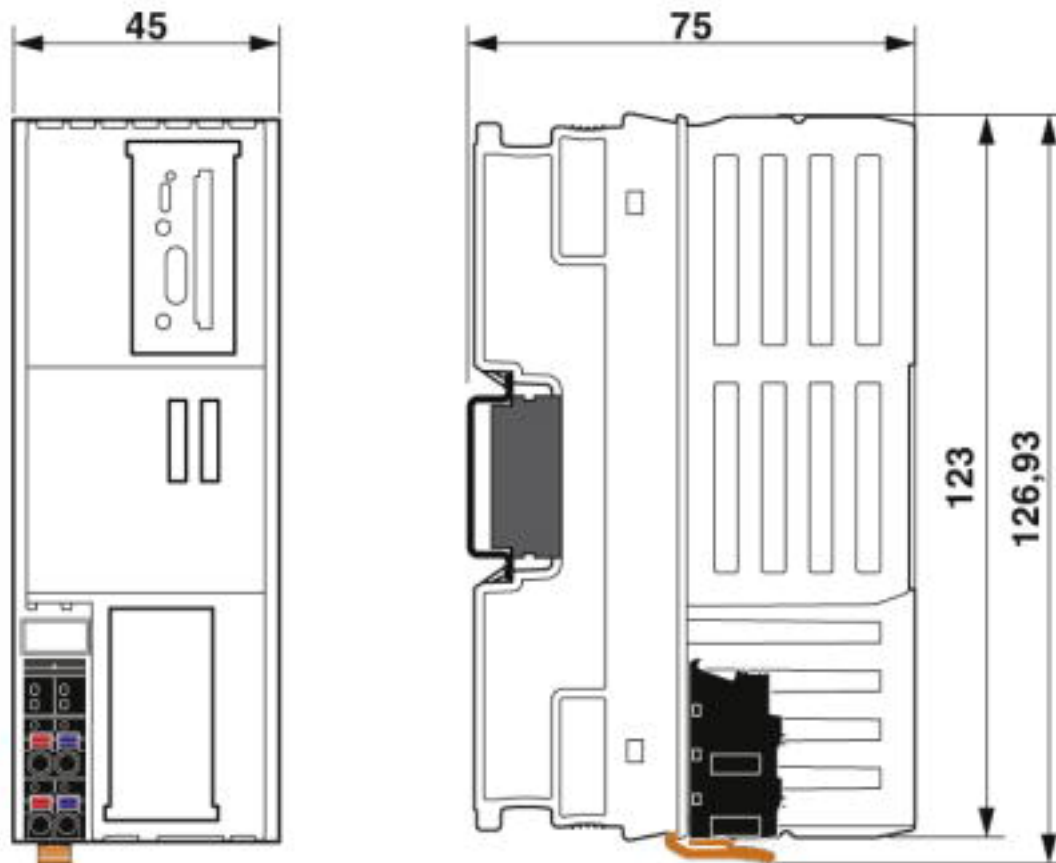

## Classifications

### eCl@ss

eCl@ss 4.0	27240602
eCl@ss 4.1	27240602
eCl@ss 5.0	27242700
eCl@ss 5.1	27242700
eCl@ss 6.0	27242200
eCl@ss 7.0	27242207
eCl@ss 8.0	27242207
eCl@ss 9.0	27242207

### ETIM

ETIM 3.0	EC001045
ETIM 4.0	EC001435
ETIM 5.0	EC000236
ETIM 6.0	EC000236
ETIM 7.0	EC000236

## Controller - AXC F 2152 - 2404267

### Approvals

#### Approvals








#### Approvals

DNV GL / ABS / BSH / RINA / UL Listed / cUL Listed / PRS / BV / NK / UL Listed / cUL Listed / NK / ABS / PRS / DNV GL / BV / RINA / BSH

#### Ex Approvals

UL Listed / cUL Listed / UL Listed / cUL Listed / cULus Listed


#### Approval details

DNV GL		<a href="https://approvalfinder.dnvgl.com/">https://approvalfinder.dnvgl.com/</a>	TAA00000DF
ABS		<a href="http://www.eagle.org/eagleExternalPortalWEB/">http://www.eagle.org/eagleExternalPortalWEB/</a>	18-HG1767360-PDA
BSH		<a href="http://www.bsh.de/de/index.jsp">http://www.bsh.de/de/index.jsp</a>	840
RINA		<a href="http://www.rina.org/en">http://www.rina.org/en</a>	ELE256518XG
UL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
cUL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
PRS		<a href="http://www.prs.pl/">http://www.prs.pl/</a>	TE/2239/880590/19
BV		<a href="http://www.veristar.com/portal/veristarinfo/generalinfo/approved/approvedProducts/equipmentAndMaterials">http://www.veristar.com/portal/veristarinfo/generalinfo/approved/approvedProducts/equipmentAndMaterials</a>	36433/B0 BV
NK		<a href="http://www.classnk.or.jp/hp/en/">http://www.classnk.or.jp/hp/en/</a>	14A006

## Controller - AXC F 2152 - 2404267

### Approvals

UL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
-----------	---	---	---------------

cUL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
------------	---	---	---------------


NK		<a href="http://www.classnk.or.jp/hp/en/">http://www.classnk.or.jp/hp/en/</a>	14A006
----	---	---	--------

ABS		<a href="http://www.eagle.org/eagleExternalPortalWEB/">http://www.eagle.org/eagleExternalPortalWEB/</a>	18-HG1767360-PDA
-----	--	---	------------------

PRS		<a href="http://www.prs.pl/">http://www.prs.pl/</a>	TE/2239/880590/19
-----	--	---	-------------------

DNV GL		<a href="https://approvalfinder.dnvgl.com/">https://approvalfinder.dnvgl.com/</a>	TAA00000DF
--------	---	---	------------

BV		<a href="http://www.veristar.com/portal/veristarinfo/generalinfo/approved/approvedProducts/equipmentAndMaterials">http://www.veristar.com/portal/veristarinfo/generalinfo/approved/approvedProducts/equipmentAndMaterials</a>	36433/B0 BV
----	---	---	-------------

RINA		<a href="http://www.rina.org/en">http://www.rina.org/en</a>	ELE256518XG
------	---	---	-------------

BSH		<a href="http://www.bsh.de/de/index.jsp">http://www.bsh.de/de/index.jsp</a>	840
-----	--	---	-----



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)