


# IB IL 24 DI 8/HD-ECO

Inline ECO, digital input terminal,  
digital inputs: 8, 24 V DC

Data sheet  
107134\_en\_00

© PHOENIX CONTACT 2016-11-03

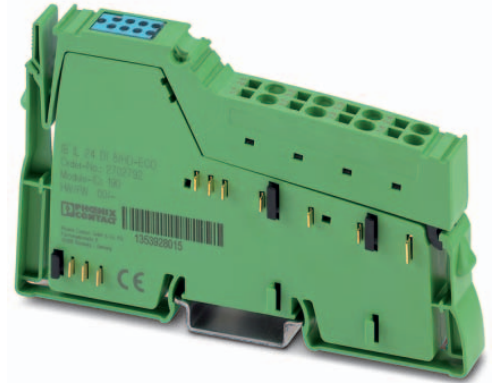

## 1 Description

The terminal is designed for use within an Inline station. It is used to acquire digital signals. Inline ECO terminals are approved for the temperature range from 0°C to +55°C. The electronics base and Inline connector are supplied as standard.

### Features

- 8 digital inputs
- Connection of sensors in single-wire technology
- Diagnostic and status indicators



This data sheet is only valid in association with the IL SYS INST UM E user manual.



Make sure you always use the latest documentation. It can be downloaded from the product at [phoenixcontact.net/products](http://phoenixcontact.net/products).

---


<b>2</b>	<b>Table of contents</b>	
1	Description .....	1
2	Table of contents .....	2
3	Ordering data .....	3
4	Technical data .....	3
5	Additional tables .....	6
6	Internal circuit diagram .....	7
7	Terminal point assignment.....	7
8	Connection notes and examples .....	8
9	Local diagnostic and status indicators .....	9
10	Process data.....	9

### 3 Ordering data

Description	Type	Order No.	Pcs./Pkt.
Inline ECO, Digital input terminal, Digital inputs: 8, 24 V DC, Connection method: 1-wire, Transmission speed in the local bus 500 kBit/s, Degree of protection IP20, including Inline connector	IB IL 24 DI 8/HD-ECO	2702792	1
Accessories	Type	Order No.	Pcs./Pkt.
Connector, for digital 1, 2 or 8-channel Inline terminals (Connector/Adapter)	IB IL SCN-8	2726337	10
Labeling field, width: 12.2 mm (Marking)	IB IL FIELD 2	2727501	10
Inline terminal for power distribution (24 V), complete with accessories, (connector and labeling field) 24 V supply voltage is fed out from the segment circuit (US)	IB IL PD 24V-PAC	2862987	1
Inline terminal for power distribution (GND), complete with accessories, (connector and labeling field) connections for GND	IB IL PD GND-PAC	2862990	1
VARIOFACE front adapter for Inline HD modules, for transferring 8 digital signals. (Connector/Adapter)	FLKM 14-PA-INLINE/DIO8	2900889	1
Documentation	Type	Order No.	Pcs./Pkt.
User manual, English, Automation terminals of the Inline product range	IL SYS INST UM E	-	-
Data sheet, English, INTERBUS addressing	DB GB IBS SYS ADDRESS	-	-

### 4 Technical data

#### Dimensions (nominal sizes in mm)

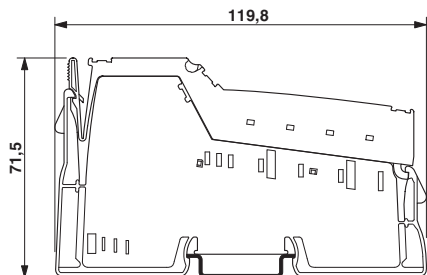

Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm

<b>General data</b>	
Color	green
Weight	60 g (with connector)
Operating mode	Process data mode with one byte
Ambient temperature (operation)	0 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)
Permissible humidity (storage/transport)	10 % ... 95 % (according to DIN EN 61131-2)
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20
Protection class	III, IEC 61140, EN 61140, VDE 0140-1
<b>Connection data</b>	
Designation	Inline connector
Connection method	Spring-cage connection
Conductor cross section solid / stranded	0.08 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> / 0.08 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section [AWG]	28 ... 16
Stripping length	8 mm
<b>Interface Inline local bus</b>	
Connection method	Inline data jumper
Transmission speed	500 kbps
<b>Power consumption</b>	
Segment circuit supply $U_S$	24 V DC (nominal value)
Current consumption from $U_S$	max. 5.5 mA DC
Communications power $U_L$	7.5 V DC
Current consumption from $U_L$	max. 30 mA DC
<b>Digital inputs</b>	
Number of inputs	8
Connection method	Spring-cage connection
Connection method	1-wire
Description of the input	EN 61131-2 types 1 and 3
Nominal input voltage	24 V DC
Nominal input current	typ. 2.4 mA
Input voltage range "0" signal	-3 V DC ... 5 V DC
Input voltage range "1" signal	11 V DC ... 30 V DC
Delay at signal change from 0 to 1	typ. 1 ms
Delay at signal change from 1 to 0	typ. 1 ms
Permissible conductor length to the sensor	30 m

**Programming data (INTERBUS, local bus)**

ID code (hex)	BE
ID code (dec.)	190
Length code (hex)	81
Length code (dec.)	129
Process data channel	8 Bit
Input address area	1 Byte
Output address area	0 Byte
Parameter channel (PCP)	0 Byte
Register length (bus)	8 Bit



For the programming data/configuration data of other bus systems, please refer to the corresponding electronic device data sheet (e.g., GSD, EDS).

**Configuration and parameter data in a PROFIBUS system**

Required parameter data	1 Byte
Need for configuration data	4 Byte

**Error messages to the higher level control or computer system**

None

**Electrical isolation/isolation of the voltage areas**

Test section	Test voltage
7.5 V supply (bus logics)/24 V supply (I/O)	500 V AC, 50 Hz, 1 min.
7.5 V supply (bus logics) / functional earth ground	500 V AC, 50 Hz, 1 min.
24 V supply (I/O) / functional earth ground	500 V AC, 50 Hz, 1 min.



To achieve electrical isolation between the logic level and the I/O area, supply these areas from separate power supply units. Interconnection of the power supply units in the 24 V area is not permitted (see IL SYS INST UM E user manual).

**Approvals**

For the latest approvals, please visit [phoenixcontact.net/products](http://phoenixcontact.net/products).

## 5 Additional tables

Input characteristic curve	
Input voltage U [V]	Typical input current I [mA]
$-30 < U \leq 0.7$	0
3	0.12
6	1.32
9	2.32
12	2.36
15	2.36
18	2.36
21	2.36
24	2.40
27	2.40
30	2.40

### 6 Internal circuit diagram

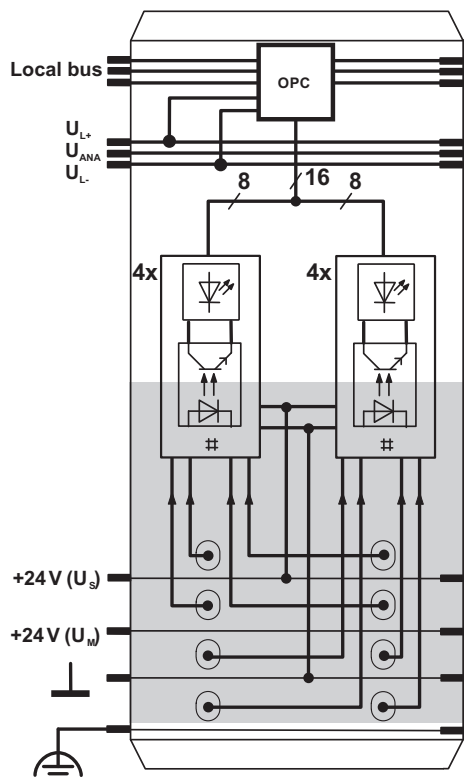





Figure 1 Internal wiring of the terminal points


Key:


 Protocol chip  
(Bus logic including voltage conditioning)

 LED (status indicator)

 Optocoupler

 Digital input

 Electrically isolated area

 Explanation for other used symbols has been provided in the IL SYS INST UM E user manual.

### 7 Terminal point assignment

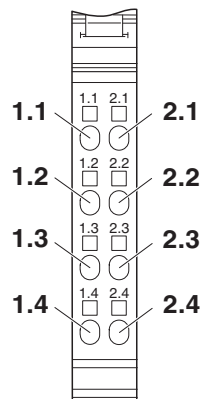


Figure 2 Terminal point assignment

Terminal point	Assignment
1.1 / 2.1	Signal input (IN01 / IN02)
1.2 / 2.2	Signal input (IN03 / IN04)
1.3 / 2.3	Signal input (IN05 / IN06)
1.4 / 2.4	Signal input (IN07 / IN08)

## 8 Connection notes and examples



When connecting the sensors observe the assignment of the terminal points to the process data.



**NOTE: Malfunction**  
The supply voltage  $U_S$  is used internally as the auxiliary supply. If it is not present, the terminal will not operate properly. Make sure that the supply voltage  $U_S$  is available.



**NOTE: Malfunction**  
The sensors and  $U_S$  must be supplied from the same voltage supply.

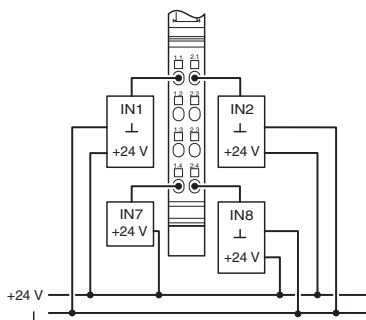


Figure 3 Example of a connection of sensors when using external busbars

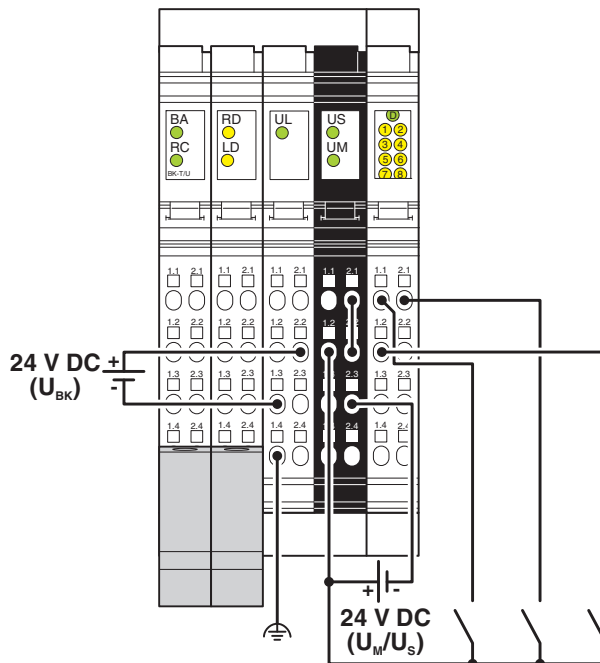


Figure 4 Connection of sensors when using external busbars

IB IL 24 DI 8/HD-ECO  
IBS IL 24 BK-T/U-PAC / IB IL PD 24V-PAC

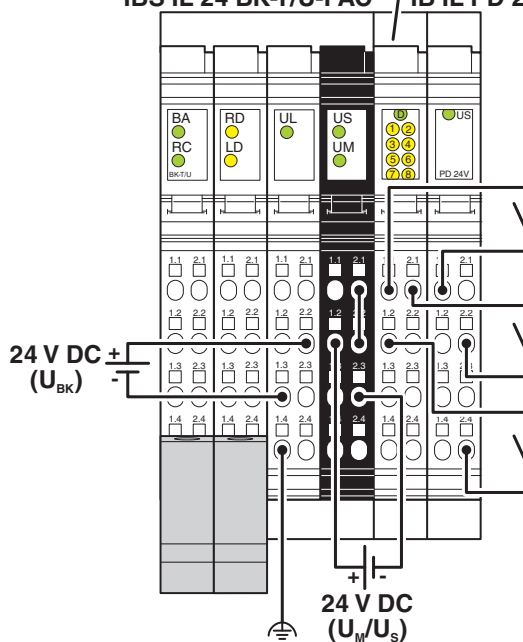


Figure 5 Connection of sensors when using the IB IL PD 24V-PAC terminal

## 9 Local diagnostic and status indicators




Figure 6 Local diagnostic and status indicators

Designation	Color	Meaning
D	Green	Diagnostics (bus and logic voltage)
1 ... 8	Yellow	Status of the inputs

### Function identification

Light blue

## 10 Process data

### Assignment of the terminal points to IN process data

(Byte.Bit) view	Byte	Byte 0							
	Bit	7	6	5	4	3	2	1	0
Assignment	Signal	IN08	IN07	IN06	IN05	IN04	IN03	IN02	IN01
	Terminal point (signal)	2.4	1.4	2.3	1.3	2.2	1.2	2.1	1.1
Status indicator	LED	8	7	6	5	4	3	2	1



For the assignment of the illustrated (byte.bit) view to your INTERBUS control or computer system, please refer to the DB GB IBS SYS ADDRESS data sheet.



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)