

AS-i gateway - ASI MA IL UNI - 2736628

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



AS-i Gateway for Inline, IP20 protection, color: Green

Product Description

This AS-Interface gateway allows an AS-i 2.1 system to be connected to the Inline system. It forms part of an Inline station in IP20 degree of protection and can also be used in Inline systems for PROFIBUS, PROFINET, DeviceNet™ or Ethernet.

The configuration of the AS-i system is performed directly on the device by means of pushbuttons, or by means of parameterization via software. AS-Interface can also be integrated into the Inline system using CMD software. The gateway has a 3-digit, 7-segment display to display the status and diagnostics results.

The ASI MA IL UNI gateway is easy to service and maintain, like all the modules in the Inline series:

- Pluggable wiring
- Extensive diagnostics displays for the local bus and AS-Interface.
- Automatic power supply when snapped into the Inline station
- Terminal points labeled with Zack marker strips


As the AS-i master, the gateway can operate up to 62 AS-i slaves in accordance with extended specification 2.1.

Your advantages

- PROFIBUS
- CANopen®
- DeviceNet™
- EtherNet/IP™
- PROFINET
- INTERBUS



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 974282
GTIN	4017918974282
Weight per Piece (excluding packing)	210.000 g
Custom tariff number	85176200
Country of origin	Germany

AS-i gateway - ASI MA IL UNI - 2736628

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	73.2 mm
Height	119.8 mm
Depth	71.5 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Degree of protection	IP20

Interfaces

Interface	Inline local bus
Connection method	Inline data jumper

Power supply

Typical current consumption	200 mA (from the AS-i network)
-----------------------------	--------------------------------

Electrical isolation

Test section	Electrical isolation AS-i / INTERBUS 500 V AC 50 Hz 1 min.
--------------	--

Operating elements

Keys	2 buttons (Mode/Set) for configuring the AS-i network
Number of AS-i slaves	62
Number of PCP data	1 word
Local diagnostics	Addresses, error messages 3-character display
	Operating voltage AS-i (U ASI) Green LED
	Automatic address programming active Green LED
	Configuration mode active (PRJ Enable) Yellow LED
	AS-i configure error (CONFIG ERR) LED red
	PCP communication PCP communication Green LED
	Local bus diagnostics Local bus diagnostics Green LED

General

Weight	210 g
--------	-------

Inline potentials

Supply voltage	7.5 V
Current consumption	typ. 160 mA

Standards and Regulations

Free from substances that could impair the application of coating	Yes
Vibration (operation)	DIN EN 60068-2-6

AS-i gateway - ASI MA IL UNI - 2736628


Technical data

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

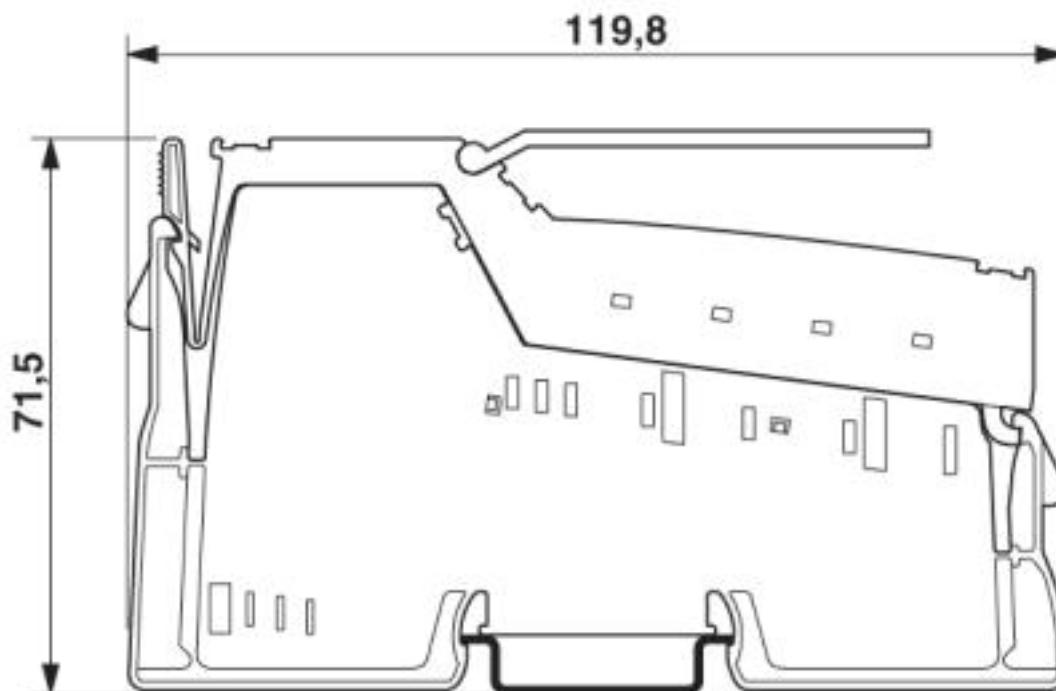

Classifications

eCl@ss

eCl@ss 4.0	27250200
eCl@ss 4.1	27250200
eCl@ss 5.0	27242200
eCl@ss 5.1	27242600
eCl@ss 6.0	27242600
eCl@ss 7.0	27242608
eCl@ss 8.0	27242608
eCl@ss 9.0	27242608

ETIM

ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604

<https://www.phoenixcontact.com/gb/products/2736628>

AS-i gateway - ASI MA IL UNI - 2736628

Classifications

ETIM

ETIM 5.0	EC001604
ETIM 6.0	EC001604
ETIM 7.0	EC001604

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	32151602

Approvals

Approvals

Approvals

ASI-Interface

Ex Approvals

Approval details

ASI-Interface		37202/ 17.12.04
---------------	---	-----------------

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk