

Inline terminal - IB IL 24 DI 2-PAC - 2861221

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Inline, Digital input terminal, Digital inputs: 2, 24 V DC, connection method: 4-wire, transmission speed in the local bus: 500 kbps, degree of protection: IP20, including Inline connector and labeling field

Product Description

The terminal is designed for use within an Inline station. It is used to acquire digital signals.

Your advantages

- Connections for 2 digital sensors
- Connection of sensors in 2, 3, and 4-wire technology
- Maximum permissible load current per sensor: 250 mA
- Diagnostic and status indicators



Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 pc |
| GTIN |  4 017918 894153 |
| GTIN | 4017918894153 |
| Weight per Piece (excluding packing) | 53.000 g |
| Custom tariff number | 85389091 |
| Country of origin | Germany |

Technical data

Note

| | |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

Dimensions

| | |
|--------------------|--------------------|
| Width | 12.2 mm |
| Height | 119.8 mm |
| Depth | 71.5 mm |
| Note on dimensions | Housing dimensions |

Inline terminal - IB IL 24 DI 2-PAC - 2861221

Technical data

Ambient conditions

| | |
|--|---|
| Ambient temperature (operation) | -25 °C ... 55 °C |
| Ambient temperature (storage/transport) | -25 °C ... 85 °C |
| Permissible humidity (operation) | 10 % ... 95 % (according to DIN EN 61131-2) |
| Permissible humidity (storage/transport) | 10 % ... 95 % (according to DIN EN 61131-2) |
| Air pressure (operation) | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Air pressure (storage/transport) | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Degree of protection | IP20 |

General

| | |
|-------------------------------|----------------|
| Mounting type | DIN rail |
| Color | green |
| Net weight | 53 g |
| Note on weight specifications | with connector |

Interfaces

| | |
|--------------------|--------------------|
| Designation | Inline local bus |
| No. of channels | 2 |
| Connection method | Inline data jumper |
| Transmission speed | 500 kbps |

Inline potentials

| | |
|----------------------|--|
| Designation | Communications power (U_L) |
| Supply voltage | 7.5 V DC (via voltage jumper) |
| Current consumption | max. 35 mA |
| Designation | Segment circuit supply (U_S) |
| Supply voltage | 24 V DC (via voltage jumper) |
| Supply voltage range | 19.2 V DC ... 30 V DC (including all tolerances, including ripple) |
| Current consumption | max. 0.5 A |
| | 0 A |

Digital inputs

| | |
|-----------------------------------|---------------------------------------|
| Input name | Digital inputs |
| Description of the input | EN 61131-2 type 1 |
| Connection method | Spring-cage connection |
| Connection technology | 4-wire |
| Number of inputs | 2 |
| Typical response time | < 1 ms |
| Protective circuit | Short-circuit and overload protection |
| Nominal input voltage U_{IN} | 24 V DC |
| Nominal input current at U_{IN} | min. 5 mA (at nominal voltage) |
| Input voltage | 24 V DC |
| Input voltage range "0" signal | -3 V DC ... 5 V DC |
| Input voltage range "1" signal | 15 V DC ... 30 V DC |

<https://www.phoenixcontact.com/gb/products/2861221>



Inline terminal - IB IL 24 DI 2-PAC - 2861221

Technical data

Electrical isolation

| | |
|--------------|---|
| Test section | 5 V supply, incoming remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min. |
| | 5 V supply, outgoing remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min. |
| | 7.5 V supply (bus logics)/24 V supply (I/O) 500 V AC 50 Hz 1 min. |
| | 24 V supply (I/O) / functional earth ground 500 V AC 50 Hz 1 min. |

Standards and Regulations

| | |
|----------------------------------|---------------------------------------|
| Connection in acc. with standard | CUL |
| Protection class | III (IEC 61140, EN 61140, VDE 0140-1) |


Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings


Inline terminal - IB IL 24 DI 2-PAC - 2861221

Connection diagram

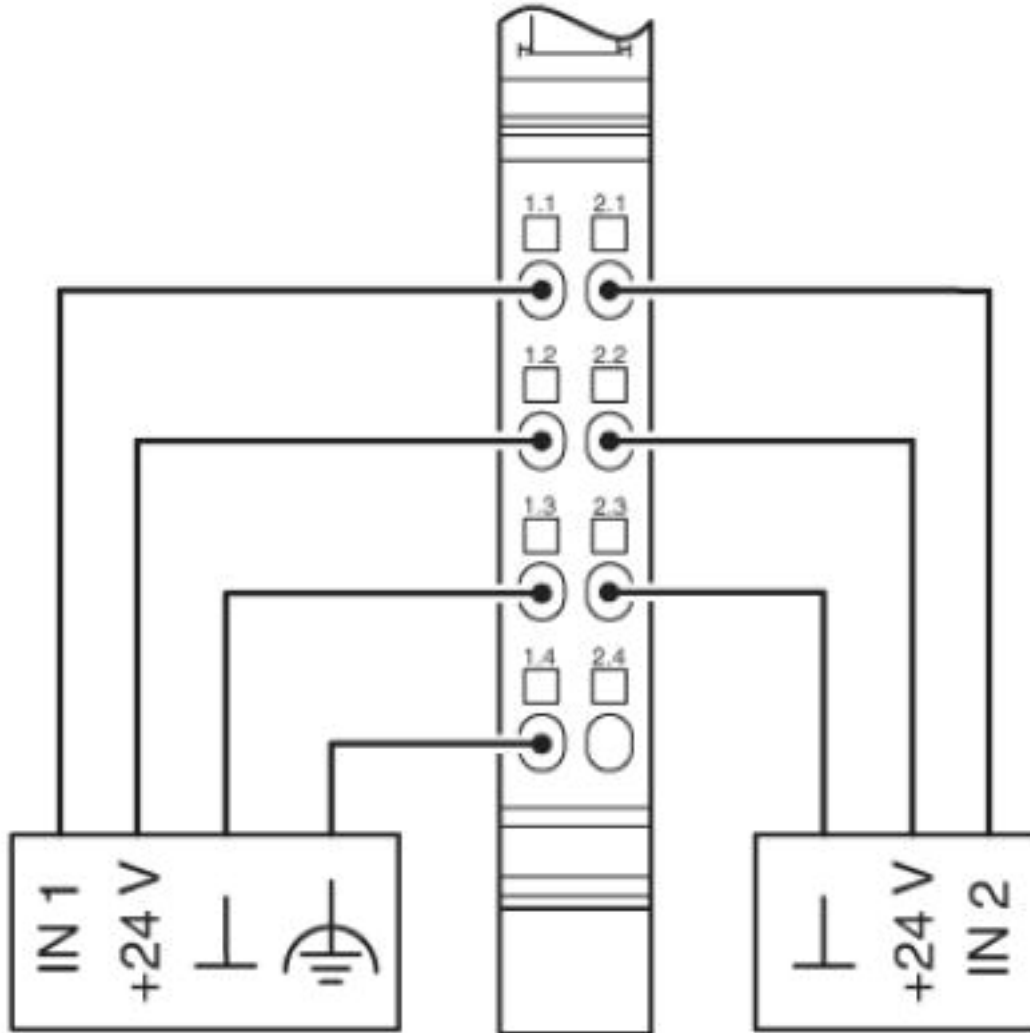

Inline terminal - IB IL 24 DI 2-PAC - 2861221

Dimensional drawing

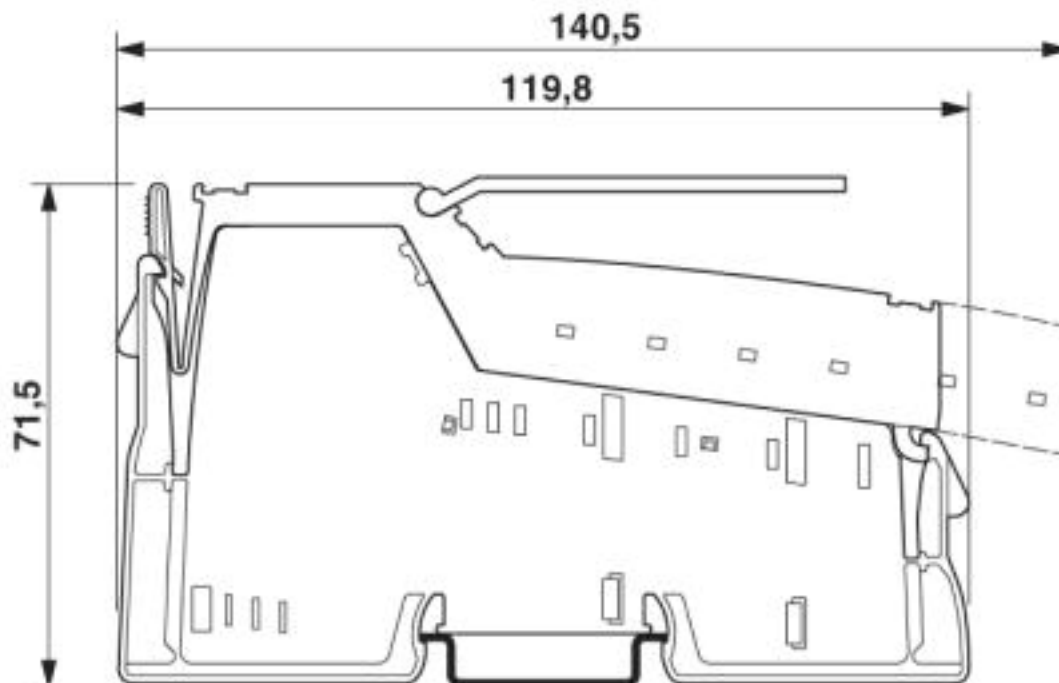

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27250300 |
| eCl@ss 4.1 | 27250300 |
| eCl@ss 5.0 | 27250300 |
| eCl@ss 5.1 | 27242600 |
| eCl@ss 6.0 | 27242600 |
| eCl@ss 7.0 | 27242604 |
| eCl@ss 8.0 | 27242604 |
| eCl@ss 9.0 | 27242604 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001430 |
| ETIM 3.0 | EC001599 |
| ETIM 4.0 | EC001599 |
| ETIM 5.0 | EC001599 |
| ETIM 6.0 | EC001599 |
| ETIM 7.0 | EC001599 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 43172015 |
| UNSPSC 7.0901 | 43201404 |
| UNSPSC 11 | 43172015 |

<https://www.phoenixcontact.com/gb/products/2861221>



Inline terminal - IB IL 24 DI 2-PAC - 2861221

Classifications

UNSPSC

| | |
|--------------|----------|
| UNSPSC 12.01 | 43201404 |
| UNSPSC 13.2 | 32151602 |

Approvals

Approvals






Approvals

DNV GL / BV / LR / ABS / BSH / RINA / UL Recognized / EAC

Ex Approvals

UL Listed / cUL Listed / cULus Listed

Approval details

| | | | |
|---------------|---|---|------------------|
| DNV GL |  | https://approvalfinder.dnvgl.com/ | TAA00000BN |
| BV |  | http://www.veristar.com/portal/veristarinfo/generalinfo/approved/approvedProducts/equipmentAndMaterials | 20977/B1 BV |
| LR |  | http://www.lr.org/en | 08/20033 |
| ABS | | http://www.eagle.org/eagleExternalPortalWEB/ | 17-HG1621871-PDA |
| BSH | | http://www.bsh.de/de/index.jsp | Anwenderhinweis |
| RINA |  | http://www.rina.org/en | ELE183315XG |
| UL Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 140324 |

<https://www.phoenixcontact.com/gb/products/2861221>



Inline terminal - IB IL 24 DI 2-PAC - 2861221

Approvals

| | | |
|-----|---|---------------|
| EAC | The EAC (Eurasian Conformity) logo, consisting of the letters "EAC" in a bold, stylized font. | EAC-Zulassung |
|-----|---|---------------|

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk