

Inline terminal - IB IL 24 DI 8-PAC - 2861247

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Inline, Digital input terminal, Digital inputs: 8 , 24 V DC, connection method: 4-wire, transmission speed in the local bus: 500 kbps, degree of protection: IP20, including Inline connectors and marking fields

Product Description


The terminal is designed for use within an Inline station.
It is used to acquire digital signals.

Your advantages

- 8 digital inputs
- Connection of sensors in 2, 3, and 4-wire technology
- Maximum permissible load current per sensor: 250 mA
- Maximum permissible load current from the terminal: 2 A



Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 pc |
| GTIN |  4 017918 894184 |
| GTIN | 4017918894184 |
| Weight per Piece (excluding packing) | 118.000 g |
| Custom tariff number | 85389091 |
| Country of origin | Germany |

Technical data

Note

| | |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

Dimensions

| | |
|--------------------|--------------------|
| Width | 48.8 mm |
| Height | 119.8 mm |
| Depth | 71.5 mm |
| Note on dimensions | Housing dimensions |

Inline terminal - IB IL 24 DI 8-PAC - 2861247

Technical data

Ambient conditions

| | |
|--|---|
| Ambient temperature (operation) | -25 °C ... 55 °C |
| Ambient temperature (storage/transport) | -25 °C ... 85 °C |
| Permissible humidity (operation) | 10 % ... 95 % (according to DIN EN 61131-2) |
| Permissible humidity (storage/transport) | 10 % ... 95 % (according to DIN EN 61131-2) |
| Air pressure (operation) | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Air pressure (storage/transport) | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Degree of protection | IP20 |

General

| | |
|-------------------------------|--|
| Mounting type | DIN rail |
| Color | green |
| Net weight | 118 g |
| Note on weight specifications | without plug |
| Diagnostics messages | Short-circuit / overload of the digital outputs Error message in diagnostics code (bus) and display by means of the LED on the motor |

Interfaces

| | |
|--------------------|--------------------|
| Designation | Inline local bus |
| No. of channels | 2 |
| Connection method | Inline data jumper |
| Transmission speed | 500 kbps |

Inline potentials

| | |
|----------------------|--|
| Designation | Communications power (U_L) |
| Supply voltage | 7.5 V DC (via voltage jumper) |
| Current consumption | max. 50 mA |
| Designation | Segment circuit supply (U_S) |
| Supply voltage | 24 V DC (via voltage jumper) |
| Supply voltage range | 19.2 V DC ... 30 V DC (including all tolerances, including ripple) |
| Current consumption | max. 2 A |
| | 0 A |

Digital inputs

| | |
|-----------------------------------|---------------------------------------|
| Input name | Digital inputs |
| Description of the input | EN 61131-2 type 1 |
| Connection method | Spring-cage connection |
| Connection technology | 4-wire |
| Number of inputs | 8 |
| Typical response time | < 1 ms |
| Protective circuit | Short-circuit and overload protection |
| Nominal input voltage U_{IN} | 24 V DC |
| Nominal input current at U_{IN} | min. 5 mA (at nominal voltage) |
| Input voltage | 24 V DC |

Inline terminal - IB IL 24 DI 8-PAC - 2861247

Technical data

Digital inputs

| | |
|--------------------------------|---------------------|
| Input voltage range "0" signal | -3 V DC ... 5 V DC |
| Input voltage range "1" signal | 15 V DC ... 30 V DC |

Electrical isolation

| | |
|--------------|---|
| Test section | 5 V supply, incoming remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min. |
| | 5 V supply, outgoing remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min. |
| | 7.5 V supply (bus logics)/24 V supply (I/O) 500 V AC 50 Hz 1 min. |
| | 24 V supply (I/O) / functional earth ground 500 V AC 50 Hz 1 min. |

Standards and Regulations


| | |
|----------------------------------|---------------------------------------|
| Connection in acc. with standard | CUL |
| Protection class | III (IEC 61140, EN 61140, VDE 0140-1) |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |


Drawings

Dimensional drawing

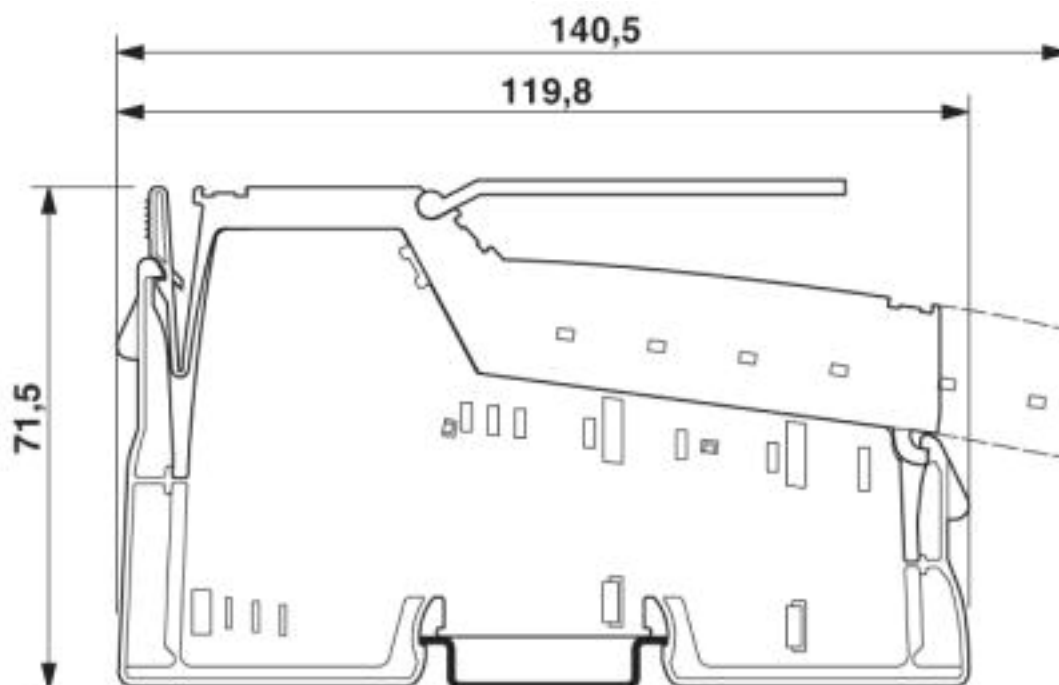

Inline terminal - IB IL 24 DI 8-PAC - 2861247

Connection diagram

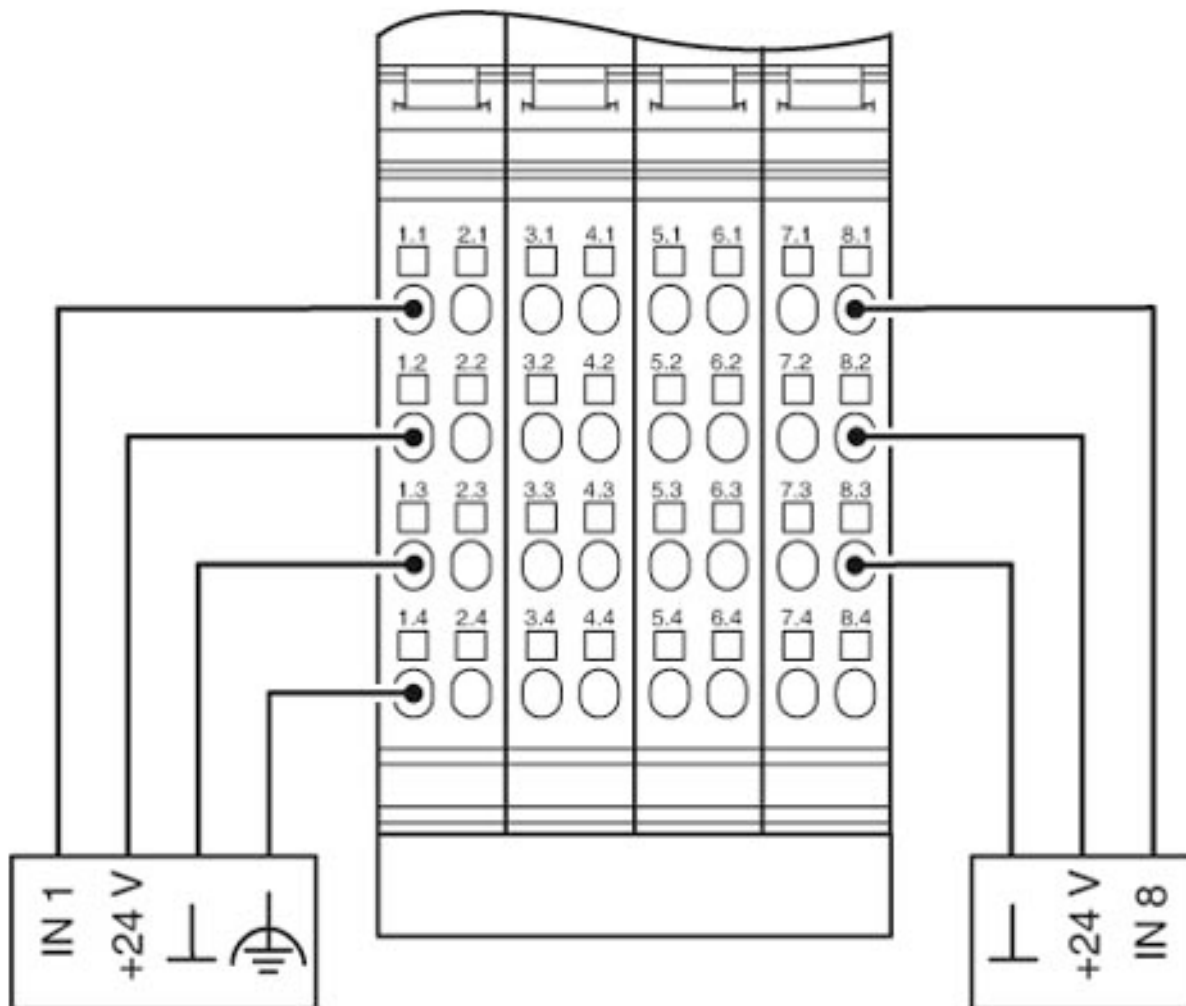

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27250300 |
| eCl@ss 4.1 | 27250300 |
| eCl@ss 5.0 | 27250300 |
| eCl@ss 5.1 | 27242600 |
| eCl@ss 6.0 | 27242600 |
| eCl@ss 7.0 | 27242604 |
| eCl@ss 8.0 | 27242604 |
| eCl@ss 9.0 | 27242604 |

<https://www.phoenixcontact.com/gb/products/2861247>



Inline terminal - IB IL 24 DI 8-PAC - 2861247

Classifications

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001430 |
| ETIM 3.0 | EC001599 |
| ETIM 4.0 | EC001599 |
| ETIM 5.0 | EC001599 |
| ETIM 6.0 | EC001599 |
| ETIM 7.0 | EC001599 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 43172015 |
| UNSPSC 7.0901 | 43201404 |
| UNSPSC 11 | 43172015 |
| UNSPSC 12.01 | 43201404 |
| UNSPSC 13.2 | 32151602 |

Approvals

Approvals

Approvals

DNV GL / BV / LR / ABS / BSH / RINA / UL Recognized / EAC

Ex Approvals

UL Listed / cUL Listed / cULus Listed

Approval details

| | | | |
|--------|---|---|------------|
| DNV GL |  | https://approvalfinder.dnvgl.com/ | TAA00000BN |
|--------|---|---|------------|

| | | | |
|----|---|---|-------------|
| BV |  | http://www.veristar.com/portal/veristarinfo/generalinfo/approved/approvedProducts/equipmentAndMaterials | 21595/B0 BV |
|----|---|---|-------------|

| | | | |
|----|---|---|----------|
| LR |  | http://www.lr.org/en | 08/20033 |
|----|---|---|----------|

| | | | |
|-----|--|---|------------------|
| ABS | | http://www.eagle.org/eagleExternalPortalWEB/ | 17-HG1621871-PDA |
|-----|--|---|------------------|

| | | | |
|-----|--|---|-----------------|
| BSH | | http://www.bsh.de/de/index.jsp | Anwenderhinweis |
|-----|--|---|-----------------|


11/25/2019 Page 5 / 6


<https://www.phoenixcontact.com/gb/products/2861247>



Inline terminal - IB IL 24 DI 8-PAC - 2861247

Approvals

| | | | |
|------|---|---|-------------|
| RINA |  | http://www.rina.org/en | ELE183315XG |
|------|---|---|-------------|

| | | | |
|---------------|---|---|---------------|
| UL Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 140324 |
|---------------|---|---|---------------|

| | | | |
|-----|---|--|---------------|
| EAC |  | | EAC-Zulassung |
|-----|---|--|---------------|

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

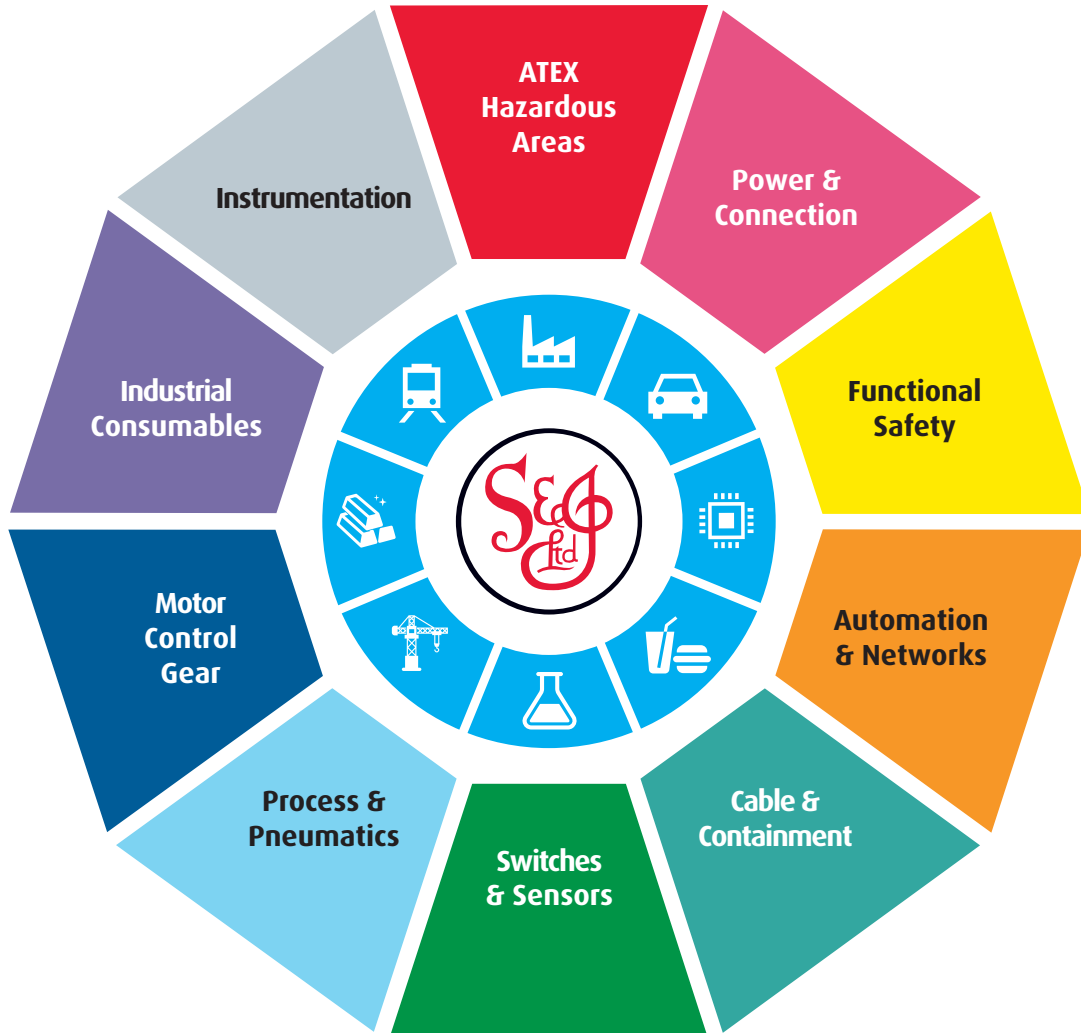

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk