

## DC/DC converters - QUINT-PS/48DC/24DC/ 5 - 2320144

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Primary-switched QUINT DC/DC converter for DIN rail mounting with SFB (Selective Fuse Breaking) Technology, input: 48 V DC, output: 24 V DC/5 A

### Product Description

QUINT DC/DC converter with maximum functionality

DC/DC converters alter the voltage level, regenerate the voltage at the end of long cables or enable the creation of independent supply systems by means of electrical isolation.


QUINT DC/DC converters magnetically and therefore quickly trip circuit breakers with six times the nominal current, for selective and therefore cost-effective system protection. The high level of system availability is additionally ensured, thanks to preventive function monitoring, as it reports critical operating states before errors occur.

### Your advantages

- ✓ Reliable starting of difficult loads, thanks to the static POWER BOOST power reserve with up to 125% nominal current permanently
- ✓ Preventive function monitoring indicates critical operating states before errors occur
- ✓ Constant voltage: output voltage regenerated even at the end of long cables
- ✓ Support conversion to various voltage levels
- ✓ Electrical isolation: for setting up independent supply systems



### Key Commercial Data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 1 pc  |
| GTIN                                 | <br>4 046356 482257 |
| GTIN                                 | 4046356482257   |
| Weight per Piece (excluding packing) | 700.000 g   |
| Custom tariff number                 | 85044030  |
| Country of origin                    | China   |

### Technical data

#### Dimensions

|        |        |
|--------|--------|
| Width  | 32 mm  |
| Height | 130 mm |
| Depth  | 125 mm |

## DC/DC converters - QUINT-PS/48DC/24DC/ 5 - 2320144

### Technical data

#### Dimensions

|                                  |        |
|----------------------------------|--------|
| Width with alternative assembly  | 122 mm |
| Height with alternative assembly | 130 mm |
| Depth with alternative assembly  | 35 mm  |

#### Ambient conditions

|  |  |
|--|--|
| Degree of protection                           | IP20   |
| Ambient temperature (operation)                | -25 °C ... 70 °C (> 60 °C Derating: 2.5 %/K) |
| Ambient temperature (start-up type tested)     | -40 °C                                       |
| Ambient temperature (storage/transport)        | -40 °C ... 85 °C                             |
| Max. permissible relative humidity (operation) | ≤ 95 % (at 25 °C, non-condensing)            |
| Climatic class                                 | 3K3 (in acc. with EN 60721)                  |
| Degree of pollution                            | 2  |

#### Input data

|  |  |
|--|--|
| Nominal input voltage range              | 48 V DC                                    |
| Input voltage range                      | 30 V DC ... 60 V DC                        |
| Current consumption                      | 3.5 A (48 V DC)                            |
| Inrush current                           | < 5 A (typical)                            |
| Mains buffering time                     | > 14 ms (48 V DC)                          |
| Input fuse                               | 10 A (slow-blow, internal)                 |
| Recommended breaker for input protection | 10 A ... 16 A (Characteristics B, C, D, K) |
| Type of protection                       | Transient surge protection                 |
| Protective circuit/component             | Varistor                                   |

#### Output data

|  |   |
|--|---|
| Nominal output voltage                             | 24 V DC ±1 %  |
| Setting range of the output voltage ( $U_{Set}$ )  | 18 V DC ... 29.5 V DC (> 24 V DC, constant capacity restricted) |
| Nominal output current ( $I_N$ )                   | 5 A (-25 °C ... 60 °C)  |
| POWER BOOST ( $I_{Boost}$ )                        | 6.25 A (-25 °C ... 40 °C permanent, $U_{OUT} = 24$ V DC)        |
| Selective Fuse Breaking ( $I_{SFB}$ )              | 30 A (12 ms)  |
| Derating   | 60 °C ... 70 °C (2.5%/K)  |
| Connection in parallel                             | Yes, for redundancy and increased capacity                      |
| Connection in series                               | yes   |
| Feedback voltage resistance                        | 35 V DC   |
| Protection against overvoltage at the output (OVP) | < 35 V DC   |
| Max. capacitive load                               | unlimited   |
| Active current limitation                          | Approximately 6.9 A   |
| Control deviation                                  | < 1 % (change in load, static 10 % ... 90 %)                    |
|  | < 2 % (change in load, dynamic 10 % ... 90 %)                   |
|  | < 0.1 % (change in input voltage ±10 %)                         |
| Residual ripple                                    | < 25 mV <sub>PP</sub>   |
| Peak switching voltages nominal load               | < 5 mV <sub>PP</sub> (20 MHz)                                   |

## DC/DC converters - QUINT-PS/48DC/24DC/ 5 - 2320144

### Technical data

#### Output data

|  |       |
|--|-------|
| Maximum power dissipation in no-load condition | 2.7 W |
| Power loss nominal load max.                   | 11 W  |

#### General

|                                 |   |
|---------------------------------|---|
| Net weight                      | 0.7 kg  |
| Efficiency                      | > 91.5 %  |
| Insulation voltage input/output | 1.5 kV (type test)<br>1 kV (routine test)   |
| Protection class                | III   |
| Degree of protection            | IP20  |
|                                 | > 995000 h (40 °C)  |
| Mounting position               | horizontal DIN rail NS 35, EN 60715   |
| Assembly instructions           | alignable: $P_N \geq 50\%$ , 5 mm horizontally, 15 mm next to active components, 50 mm vertically<br>alignable: $P_N < 50\%$ , 0 mm horizontally, 40 mm vertically top, 20 mm vertically bottom |

#### Connection data, input

|                                       |                            |
|---------------------------------------|----------------------------|
| Connection method                     | Pluggable screw connection |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup>        |
| Conductor cross section solid max.    | 2.5 mm <sup>2</sup>        |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup>        |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup>        |
| Conductor cross section AWG min.      | 24                         |
| Conductor cross section AWG max.      | 12                         |
| Stripping length                      | 8 mm                       |
| Screw thread                          | M3                         |

#### Connection data, output

|                                       |                            |
|---------------------------------------|----------------------------|
| Connection method                     | Pluggable screw connection |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup>        |
| Conductor cross section solid max.    | 2.5 mm <sup>2</sup>        |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup>        |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup>        |
| Conductor cross section AWG min.      | 24                         |
| Conductor cross section AWG max.      | 12                         |
| Stripping length                      | 7 mm                       |
| Screw thread                          | M3                         |

#### Connection data for signaling

|                                       |                     |
|---------------------------------------|---------------------|
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.    | 2.5 mm <sup>2</sup> |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup> |

## DC/DC converters - QUINT-PS/48DC/24DC/ 5 - 2320144

### Technical data

#### Connection data for signaling

|                                  |    |
|----------------------------------|----|
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 12 |
| Screw thread                     | M3 |

#### Standards

|  |                            |
|--|----------------------------|
| EMC requirements for noise immunity  | EN 61000-6-1               |
|  | EN 61000-6-2               |
| EMC requirements for noise emission  | EN 61000-6-3               |
|  | EN 61000-6-4               |
| Standard - Electrical safety   | EN 60950-1/VDE 0805 (SELV) |
| Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations | EN 50178/VDE 0160 (PELV)   |
| Standard – Safety extra-low voltage  | EN 60950-1 (SELV)          |
|  | EN 60204-1 (PELV)          |
| Standard - Safe isolation  | DIN VDE 0100-410           |
| Rail applications  | EN 50121-4                 |

#### Conformance/approvals

|              |  |
|--------------|--|
| UL approvals | UL/C-UL listed UL 508  |
|              | UL/C-UL Recognized UL 60950-1  |
|              | UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D (Hazardous Location) |

#### EMC data

|                               |   |
|-------------------------------|---|
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU |
| Electrostatic discharge       | EN 61000-4-2                              |
| Contact discharge             | 8 kV (Test Level 4)                       |
| Discharge in air              | 15 kV (Test Level 4)                      |
| Electromagnetic HF field      | EN 61000-4-3                              |
| Frequency range               | 80 MHz ... 1 GHz                          |
| Test field strength           | 20 V/m (Test Level 3)                     |
| Frequency range               | 1 GHz ... 2 GHz                           |
| Test field strength           | 10 V/m (Test Level 3)                     |
| Frequency range               | 2 GHz ... 3 GHz                           |
| Test field strength           | 10 V/m (Test Level 3)                     |
| Comments                      | Criterion A                               |
| Fast transients (burst)       | EN 61000-4-4                              |
| Input                         | 2 kV (Test Level 3 - asymmetrical)        |
| Output                        | 2 kV (Test Level 3 - asymmetrical)        |
| Signal                        | 2 kV (Test Level 4 - asymmetrical)        |
| Comments                      | Criterion A                               |
| Surge voltage load (surge)    | EN 61000-4-5                              |
| Input                         | 1 kV (Test Level 2 - symmetrical)         |

# DC/DC converters - QUINT-PS/48DC/24DC/ 5 - 2320144

## Technical data

### EMC data


|                 |  |
|-----------------|--|
|                 | 2 kV (Test Level 3 - asymmetrical)   |
| Output          | 1 kV (Test Level 2 - symmetrical)  |
|                 | 2 kV (Test Level 3 - asymmetrical)   |
| Signal          | 1 kV (Test Level 2 - asymmetrical)   |
| Comments        | Criterion A  |
| I/O/S           | asymmetrical   |
| Frequency range | 0.15 MHz ... 80 MHz  |
| Voltage         | 10 V (Test Level 3)  |
| Comments        | Criterion A  |
| Criterion A     | Normal operating behavior within the specified limits.                               |
| Criterion B     | Temporary impairment to operational behavior that is corrected by the device itself. |

### Environmental Product Compliance

|            |   |
|------------|---|
| REACH SVHC | Lead 7439-92-1  |
| China RoHS | Environmentally Friendly Use Period = 25;   |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## Drawings

Block diagram

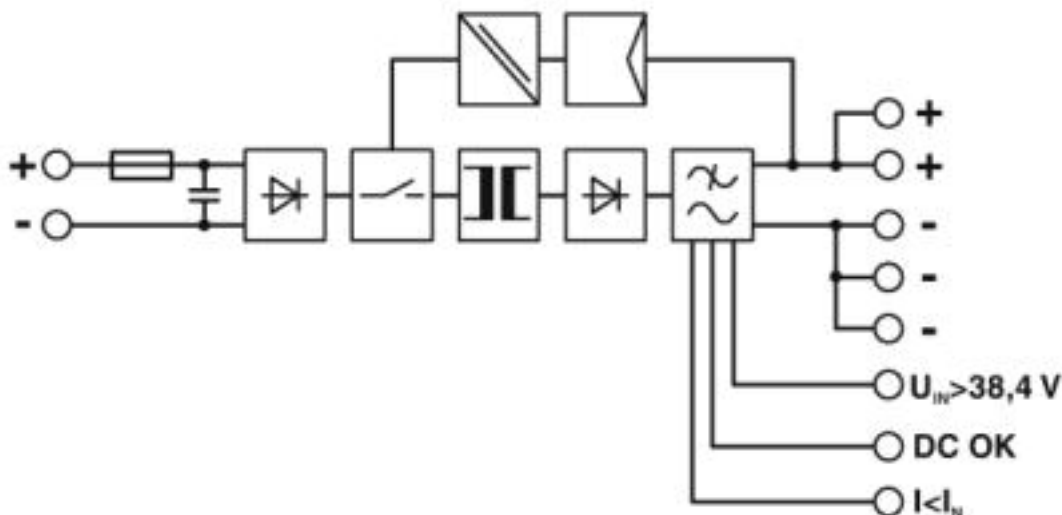

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27210900 |
| eCl@ss 4.1 | 27210900 |

## DC/DC converters - QUINT-PS/48DC/24DC/ 5 - 2320144

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 5.0 | 27210900 |
| eCl@ss 5.1 | 27210900 |
| eCl@ss 6.0 | 27210900 |
| eCl@ss 7.0 | 27210901 |
| eCl@ss 8.0 | 27210901 |
| eCl@ss 9.0 | 27210901 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC002540 |
| ETIM 5.0 | EC002046 |
| ETIM 6.0 | EC002046 |
| ETIM 7.0 | EC002046 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211502 |
| UNSPSC 7.0901 | 39121004 |
| UNSPSC 11     | 39121004 |
| UNSPSC 12.01  | 39121004 |
| UNSPSC 13.2   | 39121041 |

### Approvals

#### Approvals

##### Approvals


BV / LR / NK / ABS / RINA / UL Listed / UL Recognized / cUL Recognized / IEC EE CB Scheme / cUL Listed / EAC / EAC / DNV GL / cULus Recognized / cULus Listed

##### Ex Approvals

UL Listed / cUL Listed / cULus Listed










#### Approval details

|    |   |   |             |
|----|---|---|-------------|
| BV |  | <a href="http://www.veristar.com/portal/veristarinfo/generalinfo/approved/approvedProducts/equipmentAndMaterials">http://www.veristar.com/portal/veristarinfo/generalinfo/approved/approvedProducts/equipmentAndMaterials</a> | 27662/B0 BV |
|----|---|---|-------------|

|    |   |   |          |
|----|---|---|----------|
| LR |  | <a href="http://www.lr.org/en">http://www.lr.org/en</a> | 12/20030 |
|----|---|---|----------|

## DC/DC converters - QUINT-PS/48DC/24DC/ 5 - 2320144


## Approvals

|                 |   |   |                          |
|-----------------|---|---|--------------------------|
| NK              |    | <a href="http://www.classnk.or.jp/hp/en/">http://www.classnk.or.jp/hp/en/</a>   | 12A013                   |
| ABS             |   | <a href="http://www.eagle.org/eagleExternalPortalWEB/">http://www.eagle.org/eagleExternalPortalWEB/</a>   | 15-GD1363806-PDA         |
| RINA            |    | <a href="http://www.rina.org/en">http://www.rina.org/en</a>   | ELE112814XG              |
| UL Listed       |    | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 123528            |
| UL Recognized   |   | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 211944            |
| cUL Recognized  |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 211944            |
| IECEE CB Scheme |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a>   | DK-5535-M1               |
| cUL Listed      |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 123528            |
| EAC             |  |   | EAC-Zulassung            |
| EAC             |  |   | RU C-<br>DE.A*30.B.01082 |


<https://www.phoenixcontact.com/gb/products/2320144>

## DC/DC converters - QUINT-PS/48DC/24DC/ 5 - 2320144

### Approvals

|                            |   |   |            |
|----------------------------|---|---|------------|
| DNV GL                     |  | <a href="https://approvalfinder.dnvgl.com/">https://approvalfinder.dnvgl.com/</a> | TAA000010E |
| Nominal voltage UN         |   | 750 V   |            |
| Nominal current IN         |   | 15 A  |            |
| mm <sup>2</sup> /AWG/kcmil |   | 4   |            |

|                  |   |
|------------------|---|
| cULus Recognized |  |
|------------------|---|

|              |   |
|--------------|---|
| cULus Listed |  |
|--------------|---|

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)