

Power supply, with protective coating - QUINT-PS/3AC/24DC/20/CO - 2320924

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Primary-switched QUINT POWER power supply for DIN rail mounting with SFB (Selective Fuse Breaking) Technology, with protective coating, input: 3-phase, output: 24 V DC/20 A

Product Description

QUINT POWER power supplies with maximum functionality

QUINT POWER circuit breakers magnetically and therefore quickly trip at six times the nominal current, for selective and therefore cost-effective system protection. In addition, the high system availability is ensured by preventive function monitoring which reports critical operating states before errors can occur.


Reliable starting of heavy loads takes place via the static power reserve POWER BOOST. Thanks to the adjustable voltage, all ranges between 18 V DC ... 29.5 V DC are covered.

Your advantages

- ✓ For superior system availability
- ✓ Reliable starting of difficult loads with the static POWER BOOST power reserve with up to 1.5 times the nominal current permanently
- ✓ Fast tripping of standard circuit breakers with dynamic power reserve SFB (selective fuse breaking) technology with up to 6 times the nominal current for 12 ms
- ✓ Preventive function monitoring
- ✓ Optimum protection with dip coating for 100 % humidity



Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 pc |
| GTIN |  4 046356 605601 |
| GTIN | 4046356605601 |
| Weight per Piece (excluding packing) | 1,873.000 g |
| Custom tariff number | 85044030 |
| Country of origin | Thailand |

Technical data

Dimensions

Power supply, with protective coating - QUINT-PS/3AC/24DC/20/ CO - 2320924

Technical data

Dimensions

| | |
|----------------------------------|--------|
| Width | 69 mm |
| Height | 130 mm |
| Depth | 125 mm |
| Width with alternative assembly | 125 mm |
| Height with alternative assembly | 130 mm |
| Depth with alternative assembly | 72 mm |

Ambient conditions

| | |
|--|--|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -40 °C ... 70 °C (> 60 °C Derating: 2.5 %/K) |
| Ambient temperature (start-up type tested) | -40 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Max. permissible relative humidity (operation) | 100 % (at 25 °C, non-condensing) |
| Climatic class | 3K3 (in acc. with EN 60721) |
| Degree of pollution | 2 |
| Installation height | 5000 m |

Input data

| | |
|--|---|
| Nominal input voltage range | 3x 400 V AC ... 500 V AC |
| Input voltage range | 3x 320 V AC ... 575 V AC |
| | 2x 360 V AC ... 575 V AC |
| | 450 V DC ... 800 V DC |
| AC frequency range | 45 Hz ... 65 Hz |
| Frequency range DC | 0 Hz |
| Discharge current to PE | < 3.5 mA |
| Current consumption | 3x 1.6 A (400 V AC) |
| | 3x 1.3 A (500 V AC) |
| | 0.9 A (600 V DC) |
| Nominal power consumption | 783 VA |
| Inrush current | < 20 A (typical) |
| Mains buffering time | typ. 28 ms (400 V AC) |
| | typ. 43 ms (500 V AC) |
| Recommended breaker for input protection | 6 A ... 16 A (AC: Characteristics B, C, D, K) |
| Type of protection | Transient surge protection |
| Protective circuit/component | Varistor, gas-filled surge arrester |

Output data

| | |
|---|---|
| Nominal output voltage | 24 V DC ± 1 % |
| Setting range of the output voltage (U_{Set}) | 18 V DC ... 29.5 V DC (> 24 V DC, constant capacity restricted) |
| Nominal output current (I_N) | 20 A (-25 °C ... 60 °C, $U_{OUT} = 24$ V DC) |
| POWER BOOST (I_{Boost}) | 26 A (-25 °C ... 40 °C permanent, $U_{OUT} = 24$ V DC) |

Power supply, with protective coating - QUINT-PS/3AC/24DC/20/CO - 2320924

Technical data

Output data

| | |
|--|---|
| Selective Fuse Breaking (I_{SFB}) | 120 A (12 ms) |
| Derating | 60 °C ... 70 °C (2.5%/K) |
| Connection in parallel | Yes, for redundancy and increased capacity |
| Connection in series | yes |
| Feedback voltage resistance | max. 32 V DC |
| Protection against overvoltage at the output (OVP) | < 32 V DC |
| Control deviation | < 1 % (change in load, static 10 % ... 90 %) |
| | < 3 % (change in load, dynamic 10 % ... 90 %) |
| | < 0.1 % (change in input voltage ± 10 %) |
| Residual ripple | < 40 mV _{PP} (with nominal values) |
| Output power | 480 W |
| Typical response time | < 0.16 s |
| Peak switching voltages nominal load | < 40 mV _{PP} (at nominal values, 20 MHz) |
| Maximum power dissipation in no-load condition | 11 W |
| Power loss nominal load max. | 40 W |

General

| | |
|---------------------------------|---|
| Net weight | 1.5 kg |
| Efficiency | > 93 % (at 400 V AC and nominal values) |
| Insulation voltage input/output | 4 kV AC (type test) |
| | 2 kV AC (routine test) |
| Insulation voltage input / PE | 3.5 kV AC (type test) |
| | 2 kV AC (routine test) |
| Insulation voltage output / PE | 500 V DC (routine test) |
| Protection class | I |
| Degree of protection | IP20 |
| MTBF (IEC 61709, SN 29500) | > 900000 h (25 °C) |
| | > 534000 h (40 °C) |
| Mounting position | horizontal DIN rail NS 35, EN 60715 |
| Assembly instructions | alignable: $P_N \geq 50\%$, 5 mm horizontally, 15 mm next to active components, 50 mm vertically alignable: $P_N < 50\%$, 0 mm horizontally, 40 mm vertically top, 20 mm vertically bottom |

Connection data, input

| | |
|---------------------------------------|---------------------|
| Connection method | Screw connection |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 6 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 4 mm ² |
| Conductor cross section AWG min. | 18 |

<https://www.phoenixcontact.com/gb/products/2320924>



Power supply, with protective coating - QUINT-PS/3AC/24DC/20/ CO - 2320924

Technical data

Connection data, input

| | |
|----------------------------------|------|
| Conductor cross section AWG max. | 10 |
| Stripping length | 7 mm |
| Screw thread | M4 |

Connection data, output

| | |
|---------------------------------------|---------------------|
| Connection method | Screw connection |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 6 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 4 mm ² |
| Conductor cross section AWG min. | 12 |
| Conductor cross section AWG max. | 10 |
| Stripping length | 7 mm |
| Screw thread | M4 |

Connection data for signaling

| | |
|---------------------------------------|---------------------|
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 6 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 4 mm ² |
| Conductor cross section AWG min. | 18 |
| Conductor cross section AWG max. | 10 |
| Screw thread | M4 |

Standards

| | |
|--|--|
| Standard - Electrical safety | IEC 60950-1/VDE 0805 (SELV) |
| Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations | EN 50178/VDE 0160 (PELV) |
| Standard – Safety extra-low voltage | IEC 60950-1 (SELV) and EN 60204-1 (PELV) |
| Standard - Safe isolation | DIN VDE 0100-410 |
| Standard – Protection against shock currents, basic requirements for protective separation in electrical equipment | EN 50178 |
| Standard – Limitation of mains harmonic currents | EN 61000-3-2 |
| Standard - Equipment safety | BG (design tested) |
| Mains variation/undervoltage | SEMI F47-0706 Compliance Certificate |
| Rail applications | EN 50121-4 |
| | EN 50155 |

Conformance/approvals

| | |
|--------------|--|
| UL approvals | UL/C-UL listed UL 508 |
| | UL/C-UL Recognized UL 60950-1 (3-wire + PE, star net) |
| | UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D (Hazardous Location) |

11/28/2019 Page 4 / 8

Power supply, with protective coating - QUINT-PS/3AC/24DC/20/CO - 2320924

Technical data

Conformance/approvals

| | |
|-----------------------|---------------------------------------|
| CSA | CAN/CSA-C22.2 No. 60950-1-07 |
| | CSA-C22.2 No. 107.1-01 |
| Shipbuilding approval | DNV GL (EMC B), ABS, LR, RINA, NK, BV |

EMC data

| | |
|-------------------------------|--|
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU |
| Electrostatic discharge | EN 61000-4-2 |
| Contact discharge | 8 kV (Test Level 4) |
| Discharge in air | 15 kV (Test Level 4) |
| Electromagnetic HF field | EN 61000-4-3 |
| Frequency range | 80 MHz ... 1 GHz |
| Test field strength | 20 V/m (Test Level 3) |
| Frequency range | 1 GHz ... 2 GHz |
| Test field strength | 10 V/m (Test Level 3) |
| Frequency range | 2 GHz ... 3 GHz |
| Test field strength | 10 V/m (Test Level 3) |
| Comments | Criterion A |
| Fast transients (burst) | EN 61000-4-4 |
| Input | 4 kV (Test Level 4 - asymmetrical) |
| Output | 2 kV (Test Level 3 - asymmetrical) |
| Signal | 2 kV (Test Level 4 - asymmetrical) |
| Comments | Criterion B |
| Surge voltage load (surge) | EN 61000-4-5 |
| Input | 3 kV (Test Level 3 - symmetrical) |
| | 6 kV (Test Level 4 - asymmetrical) |
| Output | 1 kV (Test Level 2 - symmetrical) |
| | 2 kV (Test Level 3 - asymmetrical) |
| Signal | 1 kV (Test Level 2 - asymmetrical) |
| Comments | Criterion A |
| I/O/S | asymmetrical |
| Frequency range | 0.15 MHz ... 80 MHz |
| Voltage | 10 V (Test Level 3) |
| Comments | Criterion A |
| Criterion A | Normal operating behavior within the specified limits. |
| Criterion B | Temporary impairment to operational behavior that is corrected by the device itself. |

Environmental Product Compliance

| | |
|------------|---|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 25; |

Power supply, with protective coating - QUINT-PS/3AC/24DC/20/CO - 2320924


Technical data

Environmental Product Compliance

| | |
|--|---|
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |
|--|---|

Drawings

Block diagram

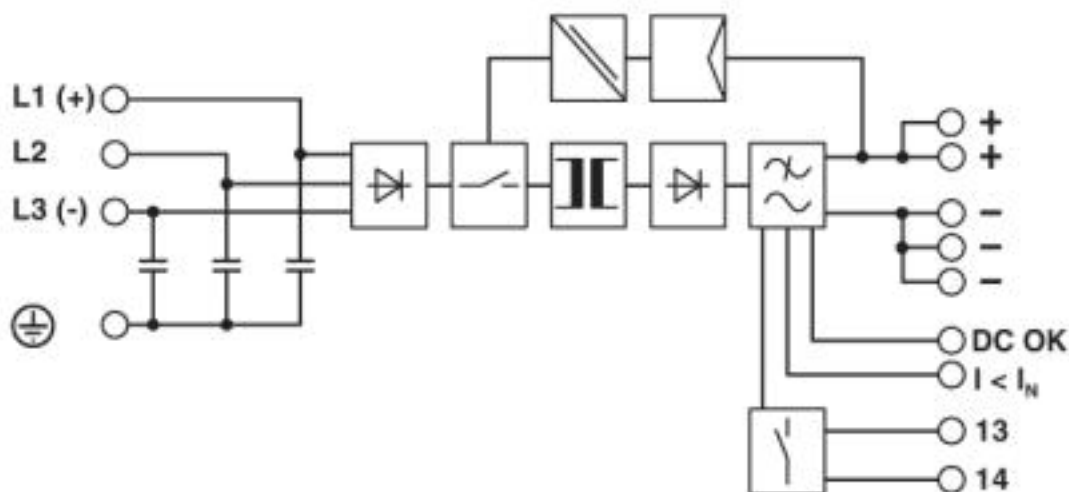

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27040700 |
| eCl@ss 4.1 | 27040700 |
| eCl@ss 5.0 | 27049000 |
| eCl@ss 5.1 | 27049000 |
| eCl@ss 6.0 | 27049000 |
| eCl@ss 7.0 | 27049002 |
| eCl@ss 8.0 | 27049002 |
| eCl@ss 9.0 | 27040701 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001039 |
| ETIM 4.0 | EC000599 |
| ETIM 5.0 | EC002540 |
| ETIM 6.0 | EC002540 |
| ETIM 7.0 | EC002540 |

UNSPSC

| | |
|-------------|----------|
| UNSPSC 6.01 | 30211502 |
|-------------|----------|

<https://www.phoenixcontact.com/gb/products/2320924>



Power supply, with protective coating - QUINT-PS/3AC/24DC/20/CO - 2320924

Classifications

UNSPSC

| | |
|---------------|----------|
| UNSPSC 7.0901 | 39121004 |
| UNSPSC 11 | 39121004 |
| UNSPSC 12.01 | 39121004 |
| UNSPSC 13.2 | 39121004 |

Approvals

Approvals

Approvals

DNV GL / CSA / UL Listed / UL Recognized / cUL Recognized / IECCEB Scheme / EAC / EAC / Type approved / cULus Recognized


Ex Approvals


UL Listed / cUL Listed / cULus Listed


Approval details

| | | | |
|--------|---|---|------------|
| DNV GL |  | https://approvalfinder.dnvgl.com/ | TAE000014W |
|--------|---|---|------------|

| | | | |
|-----|---|---|---------|
| CSA |  | http://www.csagroup.org/services-industries/product-listing/ | 1925529 |
|-----|---|---|---------|

| | | | |
|-----------|---|---|---------------|
| UL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 123528 |
|-----------|---|---|---------------|

| | | | |
|---------------|---|---|---------------|
| UL Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 211944 |
|---------------|---|---|---------------|





| | | | |
|----------------|---|---|---------------|
| cUL Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 211944 |
|----------------|---|---|---------------|

<https://www.phoenixcontact.com/gb/products/2320924>



Power supply, with protective coating - QUINT-PS/3AC/24DC/20/ CO - 2320924

Approvals

| | | | |
|------------------|---|---|--------------------------|
| IECEE CB Scheme |  | http://www.iecee.org/ | SI-2794 |
| EAC |  | | EAC-Zulassung |
| EAC |  | | RU C- DE.A*30.B.01082 |
| Type approved |  | | SI-SIQ BG 005/002 |
| cULus Recognized |  | | |

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

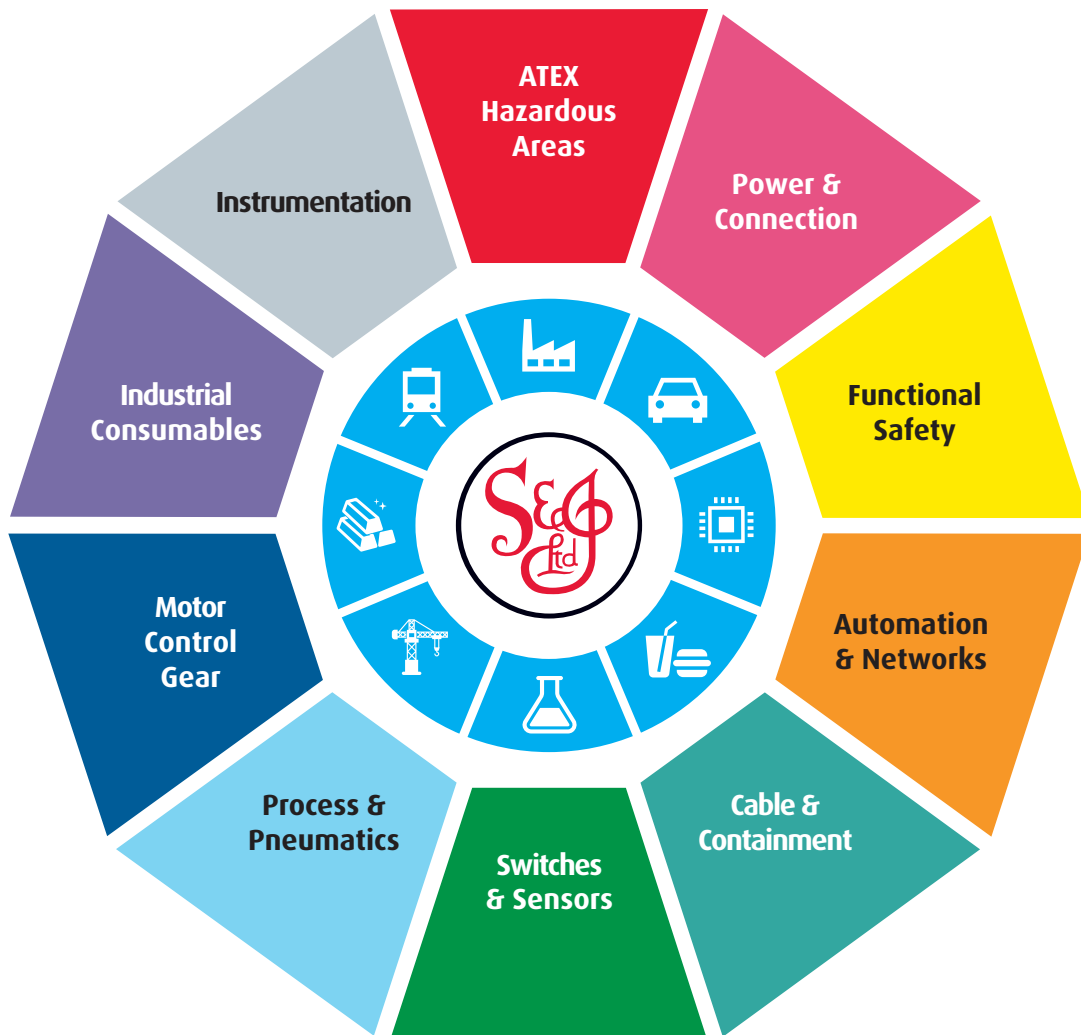

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk