

Power supply unit - TRIO-PS/1AC/48DC/ 5 - 2866491

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Primary-switched TRIO POWER power supply for DIN rail mounting, input: 1-phase, output: 48 V DC/5 A

Product Description

TRIO POWER power supplies with standard functionality

TRIO POWER is particularly suited to standard machine production, thanks to 1- and 3-phase versions up to 960 W. The wide-range input and the international approval package enable worldwide use.


The robust metal housing, the high electric strength, and the wide temperature range ensure a high level of power supply reliability.

Your advantages

- Use the third negative terminal block as a grounding terminal block and minimize installation costs
- Rugged design with metal housing and wide temperature range from -25 to +70°C
- Maximum operational reliability thanks to high MTBF (mean time between failures) of more than 500,000 hours and high dielectric strength of up to 300 V AC
- Compensation of voltage drops by means of output voltage that can be adjusted on the front



Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 pc |
| GTIN |  4 046356 288378 |
| GTIN | 4046356288378 |
| Weight per Piece (excluding packing) | 1,400.000 g |
| Custom tariff number | 85044030 |
| Country of origin | China |

Technical data

Dimensions

| | |
|--------|----------|
| Width | 60 mm |
| Height | 130 mm |
| Depth | 152.5 mm |

Ambient conditions

Power supply unit - TRIO-PS/1AC/48DC/ 5 - 2866491

Technical data

Ambient conditions

| | |
|--|--|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -25 °C ... 70 °C (> 55° C derating : 2.5%/K) |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Max. permissible relative humidity (operation) | 95 % (at 25 °C, non-condensing) |
| Climatic class | 3K3 (in acc. with EN 60721) |
| Degree of pollution | 2 |

Input data

| | |
|--|---|
| Nominal input voltage range | 100 V AC ... 240 V AC |
| Input voltage range | 85 V AC ... 264 V AC (derating < 90 V AC: 2.5 % per Kelvin) |
| Dielectric strength maximum | 300 V AC |
| AC frequency range | 45 Hz ... 65 Hz |
| Discharge current to PE | < 3.5 mA |
| Current consumption | 2.5 A (120 V AC) 1.3 A (230 V AC) |
| Nominal power consumption | 282 VA |
| Inrush current | < 15 A |
| Mains buffering time | > 15 ms (120 V AC) > 16 ms (230 V AC) |
| Recommended breaker for input protection | 10 A ... 16 A (Characteristics B, C, D, K) |
| Power factor (cos phi) | 0.96 |
| Type of protection | Transient surge protection |
| Protective circuit/component | Varistor |

Output data

| | |
|--|---|
| Nominal output voltage | 48 V DC \pm 1 % |
| Setting range of the output voltage (U_{Set}) | 30 V DC ... 56 V DC (> 48 V DC, constant capacity restricted) |
| Nominal output current (I_N) | 5 A (-25 °C ... 55 °C) |
| Derating | 55 °C ... 70 °C (2.5%/K) |
| Connection in parallel | Yes, for redundancy and increased capacity |
| Connection in series | yes |
| Feedback voltage resistance | 60 V DC |
| Protection against overvoltage at the output (OVP) | < 60 V DC |
| Max. capacitive load | unlimited |
| Active current limitation | Approx 5.7 A (in the event of a short-circuit) |
| Control deviation | < 1 % (change in load, static 10 % ... 90 %) < 2 % (change in load, dynamic 10 % ... 90 %) < 0.1 % (change in input voltage \pm 10 %) |
| Residual ripple | < 50 mV _{PP} |
| Output power | 240 W |
| Typical response time | < 1 s |

Power supply unit - TRIO-PS/1AC/48DC/ 5 - 2866491

Technical data

Output data

| | |
|--|-----------------------|
| Peak switching voltages nominal load | < 50 mV _{PP} |
| Maximum power dissipation in no-load condition | 7 W |
| Power loss nominal load max. | 28 W |

General

| | |
|---------------------------------|--|
| Net weight | 1.4 kg |
| Operating voltage display | Green LED |
| Efficiency | > 89 % (for 230 V AC and nominal values) |
| Insulation voltage input/output | 4 kV AC (type test) |
| | 2 kV AC (routine test) |
| Insulation voltage input / PE | 2 kV AC (type test) |
| | 2 kV AC (routine test) |
| Insulation voltage output / PE | 500 V DC (type test) |
| Protection class | I (with PE connection) |
| Degree of protection | IP20 |
| | > 1337000 h (40 °C) |
| Mounting position | horizontal DIN rail NS 35, EN 60715 |
| Assembly instructions | alignable: horizontally 0 mm, vertically 50 mm |

Connection data, input

| | |
|---------------------------------------|---------------------|
| Connection method | Screw connection |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 14 |
| Stripping length | 9 mm |
| Screw thread | M2,5 |

Connection data, output

| | |
|---------------------------------------|---------------------|
| Connection method | Screw connection |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 14 |
| Stripping length | 9 mm |
| Screw thread | M2,5 |

Standards

| | |
|-------------------------------------|--------------|
| EMC requirements for noise immunity | EN 61000-6-1 |
|-------------------------------------|--------------|

Power supply unit - TRIO-PS/1AC/48DC/ 5 - 2866491

Technical data

Standards

| | |
|--|----------------------------|
| | EN 61000-6-2 |
| EMC requirements for noise emission | EN 61000-6-3 |
| | EN 61000-6-4 |
| Standard - Electrical safety | EN 60950-1/VDE 0805 (SELV) |
| Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations | EN 50178/VDE 0160 (PELV) |
| Standard – Safety extra-low voltage | EN 60950-1 (SELV) |
| | EN 60204 (PELV) |
| Standard - Safe isolation | DIN VDE 0100-410 |
| Standard – Protection against shock currents, basic requirements for protective separation in electrical equipment | EN 50178 |
| Standard – Limitation of mains harmonic currents | EN 61000-3-2 |
| Rail applications | EN 50121-4 |

Conformance/approvals

| | |
|--------------|-------------------------------|
| UL approvals | UL/C-UL listed UL 508 |
| | UL/C-UL Recognized UL 60950-1 |

EMC data

| | |
|-------------------------------|---|
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU |
| Low Voltage Directive | Conformance with LV directive 2006/95/EC |
| Electrostatic discharge | EN 61000-4-2 |
| Contact discharge | 6 kV (Test Level 3) |
| Discharge in air | 8 kV (Test Level 3) |
| Electromagnetic HF field | EN 61000-4-3 |
| Frequency range | 80 MHz ... 1 GHz |
| Test field strength | 10 V/m |
| Frequency range | 1 GHz ... 2 GHz |
| Test field strength | 10 V/m |
| Frequency range | 2 GHz ... 3 GHz |
| Test field strength | 10 V/m |
| Comments | Criterion A |
| Fast transients (burst) | EN 61000-4-4 |
| Input | 4 kV (Test Level 4 - asymmetrical) |
| Output | 4 kV (Test Level 4 - asymmetrical) |
| Signal | 2 kV (Test Level 3 - asymmetrical) |
| Comments | Criterion A |
| Surge voltage load (surge) | EN 61000-4-5 |
| Input | 2 kV (Test Level 3 - symmetrical) |
| | 4 kV (Test Level 4 - asymmetrical) |
| Output | 1 kV (Test Level 2 - symmetrical) |
| | 2 kV (Test Level 3 - asymmetrical) |

Power supply unit - TRIO-PS/1AC/48DC/ 5 - 2866491

Technical data

EMC data


| | |
|-----------------|---------------------|
| Comments | Criterion A |
| Frequency range | 0.15 MHz ... 80 MHz |
| Voltage | 10 V (Test Level 3) |
| Comments | Criterion A |
| Voltage dips | EN 61000-4-11 |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 25; |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Block diagram

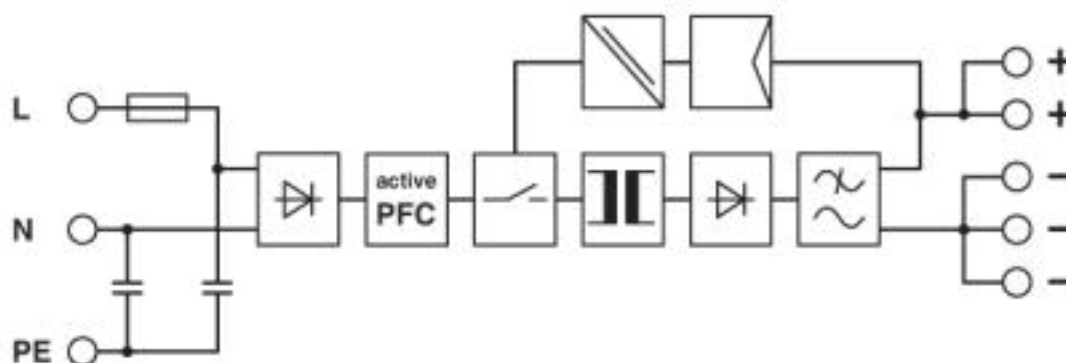

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27040700 |
| eCl@ss 4.1 | 27040700 |
| eCl@ss 5.0 | 27049000 |
| eCl@ss 5.1 | 27049000 |
| eCl@ss 6.0 | 27049000 |
| eCl@ss 7.0 | 27049002 |
| eCl@ss 8.0 | 27049002 |
| eCl@ss 9.0 | 27040701 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001039 |
| ETIM 3.0 | EC001039 |
| ETIM 4.0 | EC000599 |
| ETIM 5.0 | EC002540 |

Power supply unit - TRIO-PS/1AC/48DC/ 5 - 2866491

Classifications

ETIM

| | |
|----------|----------|
| ETIM 6.0 | EC002540 |
| ETIM 7.0 | EC002540 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211502 |
| UNSPSC 7.0901 | 39121004 |
| UNSPSC 11 | 39121004 |
| UNSPSC 12.01 | 39121004 |
| UNSPSC 13.2 | 39121004 |

Approvals

Approvals


Approvals


UL Listed / UL Recognized / cUL Recognized / cUL Listed / EAC / EAC / cULus Recognized / cULus Listed


Ex Approvals


Approval details

| | | | |
|-----------|---|---|---------------|
| UL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 123528 |
|-----------|---|---|---------------|

| | | | |
|---------------|---|---|---------------|
| UL Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 211944 |
|---------------|---|---|---------------|

| | | | |
|----------------|---|---|---------------|
| cUL Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 211944 |
|----------------|---|---|---------------|


| | | | |
|------------|---|---|---------------|
| cUL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 123528 |
|------------|---|---|---------------|


| | | |
|-----|---|---------------|
| EAC |  | EAC-Zulassung |
|-----|---|---------------|

Power supply unit - TRIO-PS/1AC/48DC/ 5 - 2866491

Approvals

| | | |
|-----|---|--------------------------|
| EAC |  | RU C- DE.A*30.B.01082 |
|-----|---|--------------------------|

| | | |
|------------------|---|--|
| cULus Recognized |  | |
|------------------|---|--|

| | | |
|--------------|---|--|
| cULus Listed |  | |
|--------------|---|--|



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk