

Safety relays - PSR-MC30-2NO-1DO-24DC-SC - 2700498

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Safety relay for emergency stop and safety doors up to SILCL 3, Cat. 4, PL e, 1 or 2-channel operation, automatic or manual, monitored start, cross-circuit detection, 2 enabling current paths, $U_s = 24 \text{ V DC}$, plug-in screw terminal block

Your advantages

- ✓ Up to Cat.4/PL e according to ISO 13849-1, SILCL 3 according to IEC 62061
- ✓ Low housing width of just 12.5 mm
- ✓ Two-channel control
- ✓ 2 enabling current paths, 1 digital signal output
- ✓ Manually monitored and automatic activation in a single device
- ✓ Cross-circuit detection
- ✓ Time saving push-in connection, tools not required
- ✓ Potentials can be easily looped through – ideal for BUS applications
- ✓ Intuitive use through colour coded actuation lever
- ✓ Can be combined with the MSTB 2,5 range
- ✓ Quick and convenient testing using integrated test option



Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 pc |
| GTIN |  4 046356 912860 |
| GTIN | 4046356912860 |
| Weight per Piece (excluding packing) | 160.000 g |
| Custom tariff number | 85371098 |
| Country of origin | Germany |

Safety relays - PSR-MC30-2NO-1DO-24DC-SC - 2700498

Technical data

Note

| | |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

Dimensions

| | |
|--------|----------|
| Width | 12.5 mm |
| Height | 112.2 mm |
| Depth | 114.5 mm |

Ambient conditions

| | |
|--|---|
| Ambient temperature (operation) | -40 °C ... 55 °C (observe derating) |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Max. permissible relative humidity (operation) | 75 % (on average, 85% infrequently, non-condensing) |
| Max. permissible humidity (storage/transport) | 75 % (on average, 85% infrequently, non-condensing) |
| Maximum altitude | ≤ 2000 m (Above sea level) |

Power supply

| | |
|--|---|
| Rated control circuit supply voltage U_s | 24 V DC -15 % / +10 % |
| | 20.4 V DC ... 26.4 V DC |
| Rated control supply current I_s | typ. 65 mA |
| Power consumption at U_s | typ. 1.56 W |
| Inrush current | 4 A ($\Delta t = 200 \mu s$ at U_s) |
| Filter time | 1 ms (at A1 in the event of voltage dips at U_s) |
| Protective circuit | Surge protection Suppressor diode |
| | Protection against polarity reversal for rated control circuit supply voltage |

Digital inputs

| | |
|--------------------------------|---|
| Input voltage range "0" signal | 0 V DC ... 5 V DC (for safe Off; at S12) |
| Input current range "0" signal | 0 mA ... 2 mA (for safe Off; at S12) |
| Inrush current | < 20 mA (with U_s/I_x to S12) |
| | < 200 mA (with U_s/I_x to S34) |
| | < 5 mA (with U_s/I_x to S22) |
| | > -15 mA (with U_s/I_x to S22/S21) |
| Current consumption | < 5 mA (with U_s/I_x to S12) |
| | < 5 mA (with U_s/I_x to S22) |
| | > -5 mA (with U_s/I_x to S34) |
| | > -5 mA (with U_s/I_x to S22/S21) |
| | < 10 mA (with U_s/I_x to S34) |
| Filter time | max. 1.5 ms (at S12, S22; test pulse width) |

Safety relays - PSR-MC30-2NO-1DO-24DC-SC - 2700498

Technical data

Digital inputs

| | |
|---|--|
| | min. 7.5 ms (at S12, S22; test pulse rate) |
| | Test pulse rate = 5 x Test pulse width |
| Voltage at input/start and feedback circuit | 24 V DC -15 % / +10 % |
| Max. permissible overall conductor resistance | 150 Ω |

Relay outputs: enabling current path

| | |
|-----------------------------|---|
| Output name | Enabling current path |
| Output description | safety-related N/O contacts |
| Number of outputs | 2 (undelayed) |
| Contact type | 2 enabling current paths |
| Contact material | AgSnO ₂ |
| Switching voltage | min. 12 V AC/DC |
| | max. 250 V AC/DC (Observe the load curve) |
| Limiting continuous current | 6 A (observe derating) |
| Inrush current | min. 3 mA |
| | max. 6 A |
| Sq. Total current | 72 A ² (observe derating) |
| Switching capacity | min. 60 mW |
| Switching frequency | 0.5 Hz |
| Mechanical service life | 10x 10 ⁶ cycles |
| Output fuse | 6 A gL/gG (N/O contact) |
| | 4 A gL/gG (for low-demand applications) |

Alarm outputs

| | |
|--------------------------|--|
| Output description | non-safety-related |
| Number of outputs | 1 (digital, PNP) |
| Voltage | 22 V DC (U _s - 2 V) |
| Current | max. 100 mA |
| Maximum inrush current | 500 mA ($\Delta t = 1$ ms at U _s) |
| Short-circuit protection | no |

Times

| | |
|-----------------------------|--|
| Typical pickup time at US | < 250 ms (when controlled via A1) |
| Typical response time at US | < 175 ms (automatic start) |
| | < 175 ms (manual, monitored start) |
| Typical release time at US | < 20 ms (when controlled via A1 or S12 and S22.) |
| Recovery time | < 500 ms |

General

Safety relays - PSR-MC30-2NO-1DO-24DC-SC - 2700498

Technical data

General

| | |
|---|--|
| Relay type | Electromechanical relay with forcibly guided contacts in accordance with IEC/EN 61810-3 (EN 50205) |
| Nominal operating mode | 100% operating factor |
| Net weight | 159 g |
| Mounting position | vertical or horizontal |
| Mounting type | DIN rail mounting |
| Assembly instructions | See derating curve |
| Degree of protection | IP20 |
| Min. degree of protection of inst. location | IP54 |
| Housing material | PBT |
| Housing color | yellow |
| Operating voltage display | 1 x green LED |
| Status display | 3 x green LED |

Connection data

| | |
|---------------------------------------|---------------------|
| Connection method | Screw connection |
| pluggable | Yes |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 12 |
| Stripping length | 7 mm |
| Screw thread | M3 |

Safety-related characteristic data

| | |
|---|--|
| Stop category | 0 |
| Designation | IEC 61508 - High demand |
| Safety Integrity Level (SIL) | 3 |
| Designation | IEC 61508 - Low demand |
| Safety Integrity Level (SIL) | 3 |
| Designation | EN ISO 13849 |
| Performance level (PL) | e (4 A DC13; 5 A AC15; 8760 switching cycles/year) |
| Category | 4 |
| Designation | EN 62061 |
| Safety Integrity Level Claim Limit (SIL CL) | 3 |

Standards and Regulations

Safety relays - PSR-MC30-2NO-1DO-24DC-SC - 2700498

Technical data

Standards and Regulations


| | |
|--------------------------------|---|
| Designation | Air clearances and creepage distances between the power circuits |
| Standards/regulations | DIN EN 50178 |
| Rated insulation voltage | 250 V AC |
| | 250 V AC |
| Rated surge voltage/insulation | Safe isolation, reinforced insulation 6 kV between input circuit and enabling current path (13/14) and enabling current path (23/24) Basic insulation 4 kV between all current paths and housing |
| Degree of pollution | 2 |
| Overvoltage category | III |
| Shock | 15g |
| Vibration (operation) | 10 Hz ... 150 Hz, 2g |
| Conformance | CE-compliant |

Environmental Product Compliance

| | |
|------------|---|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |


Drawings

Block diagram

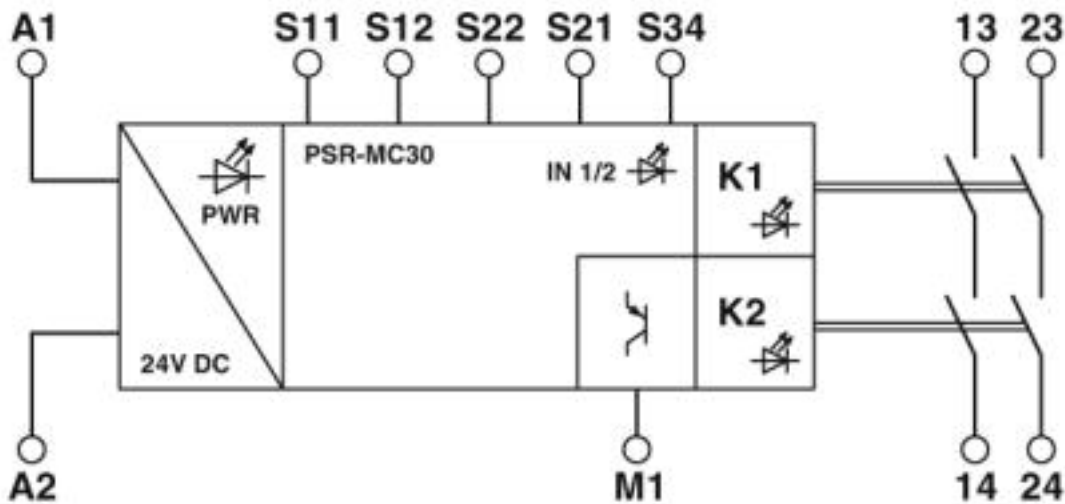

Safety relays - PSR-MC30-2NO-1DO-24DC-SC - 2700498


Block diagram

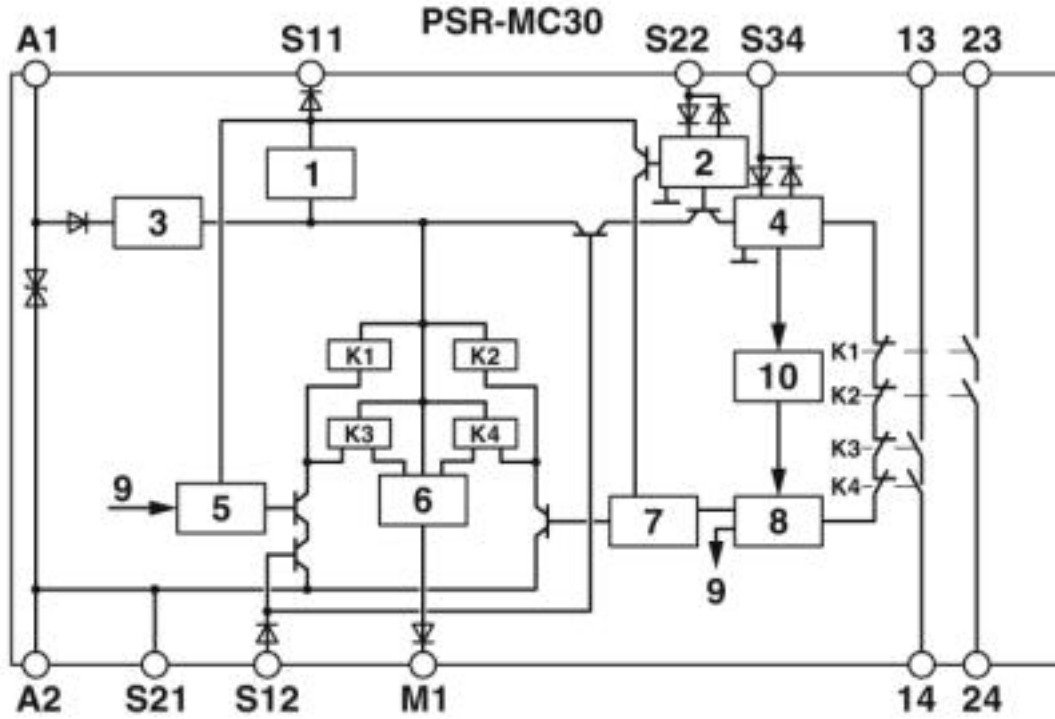

- Key:
- 1 = Current limitation
 - 2 = Input circuit
 - 3 = Voltage limitation
 - 4 = Start circuit
 - 5 = Control circuit channel 1
 - 6 = Control circuit signal output
 - 7 = Control circuit channel 2
 - 8 = Start channel 1 and 2
 - 9 = Channel 1
 - 10 = Diagnostics
 - K1, K2 ... K4 = Force-guided elementary relays

Safety relays - PSR-MC30-2NO-1DO-24DC-SC - 2700498

Circuit diagram

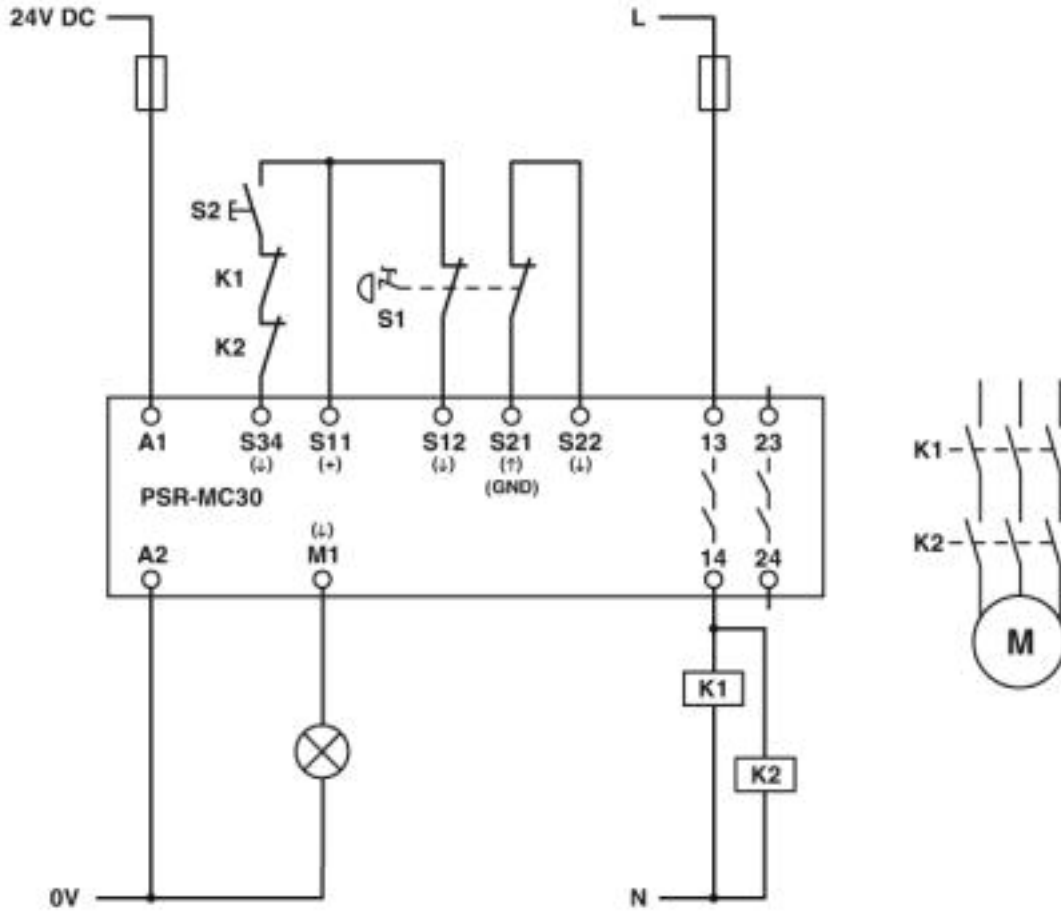

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 40020600 |
| eCl@ss 4.1 | 40020600 |
| eCl@ss 5.0 | 27371900 |
| eCl@ss 5.1 | 27371900 |
| eCl@ss 6.0 | 27371800 |
| eCl@ss 7.0 | 27371819 |
| eCl@ss 8.0 | 27371819 |
| eCl@ss 9.0 | 27371819 |

ETIM

| | |
|----------|----------|
| ETIM 5.0 | EC001449 |
|----------|----------|

<https://www.phoenixcontact.com/us/products/2700498>



Safety relays - PSR-MC30-2NO-1DO-24DC-SC - 2700498

Classifications

ETIM

| | |
|----------|----------|
| ETIM 6.0 | EC001449 |
| ETIM 7.0 | EC001449 |

UNSPSC

| | |
|-------------|----------|
| UNSPSC 13.2 | 39121501 |
|-------------|----------|

Approvals

Approvals

Approvals

GL / UL Listed / cUL Listed / Functional Safety / EAC / cULus Listed


Ex Approvals


Approval details

| | | | |
|----|---|---|-------------|
| GL |  | https://approvalfinder.dnvgl.com/ | 11253-14 HH |
|----|---|---|-------------|

| | | | |
|-----------|---|---|---------------|
| UL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 140324 |
|-----------|---|---|---------------|

| | | | |
|------------|---|---|---------------|
| cUL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 140324 |
|------------|---|---|---------------|

| | | | |
|-------------------|---|--|-----------------|
| Functional Safety |  | | 44-205-13755201 |
|-------------------|---|--|-----------------|

| | | | |
|-----|---|--|--------------------------|
| EAC |  | | RU C- DE.A*30.B.01082 |
|-----|---|--|--------------------------|

<https://www.phoenixcontact.com/us/products/2700498>



Safety relays - PSR-MC30-2NO-1DO-24DC-SC - 2700498

Approvals

cULus Listed



Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk