

Mounting Model / Horn/Light Combination 580
Horn/Light WM Contin. tone 230VAC YE



Part No.: 580.352.68



MECHANICAL DATA	
Length	77 mm
Width	70 mm
Height	251 mm
Diameter	70 mm
Materials	PC PC/ABS
Dome colour	Yellow
Housing colour	Grey
Protection category	IP33
Connection	Screw terminals
cross-sectional area maximum	2,50mm ² / 14AWG
Cable entry	Through hole
Cable entry maximum	d = 9 mm
Type of fixing	Wall mounting
Service life optical	Lamp: depends on bulb
Acoustic service life	300 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	306 g
Product weight	256 g
ELECTRICAL DATA	
Operating voltage	230V
Operating voltage type	AC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	230 VAC
Rated operational current	50 mA
Protection class	Protection class 1
Pollution degree	2
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V
OPTICAL DATA	
Light colour	Yellow
ACUSTICAL DATA	
Volume/dB(max) at 1m distance	92,0 dB (A)
Acoustic signal image	Continuous tone




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mounting Model / Horn/Light Combination 580
Horn/Light WM Contin. tone 230VAC YE

Audio frequency	600 Hz
-----------------	--------

DRAWING

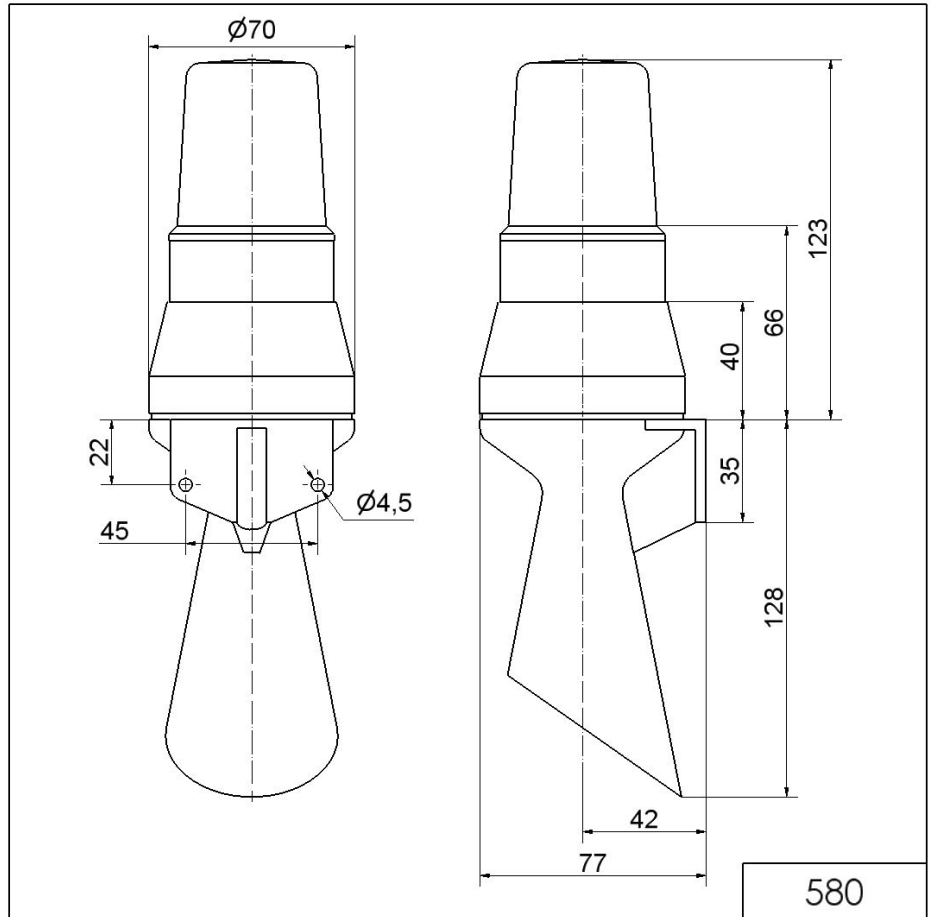

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.