

KombiSIGN 40 / ClassicLOOK

## Terminal element 24VAC/DC BK



|           |              |
|-----------|--------------|
| Part No.: | 630.800.75   |
| Series:   | KombiSIGN 40 |



### MECHANICAL DATA

|                              |                             |
|------------------------------|-----------------------------|
| Height                       | 44 mm                       |
| Diameter                     | 40 mm                       |
| Materials                    | PC                          |
| Housing colour               | Black                       |
| Protection category          | IP66<br>IP69K               |
| Connection                   | Push-in terminal            |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG |
| Working temperature minimum  | -30°C                       |
| Working temperature maximum  | +60°C                       |
| UL Type Rating               | Type 12                     |
| Weight with packaging        | 41 g                        |
| Product weight               | 26 g                        |

### ELECTRICAL DATA

|                             |         |
|-----------------------------|---------|
| Operating voltage           | 24V     |
| Operating voltage type      | AC/DC   |
| Operating voltage type      | 50Hz    |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage   | 24 VDC  |
| Pollution degree            | 3       |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / ClassicLOOK

**Terminal element 24VAC/DC BK**

**DRAWING**

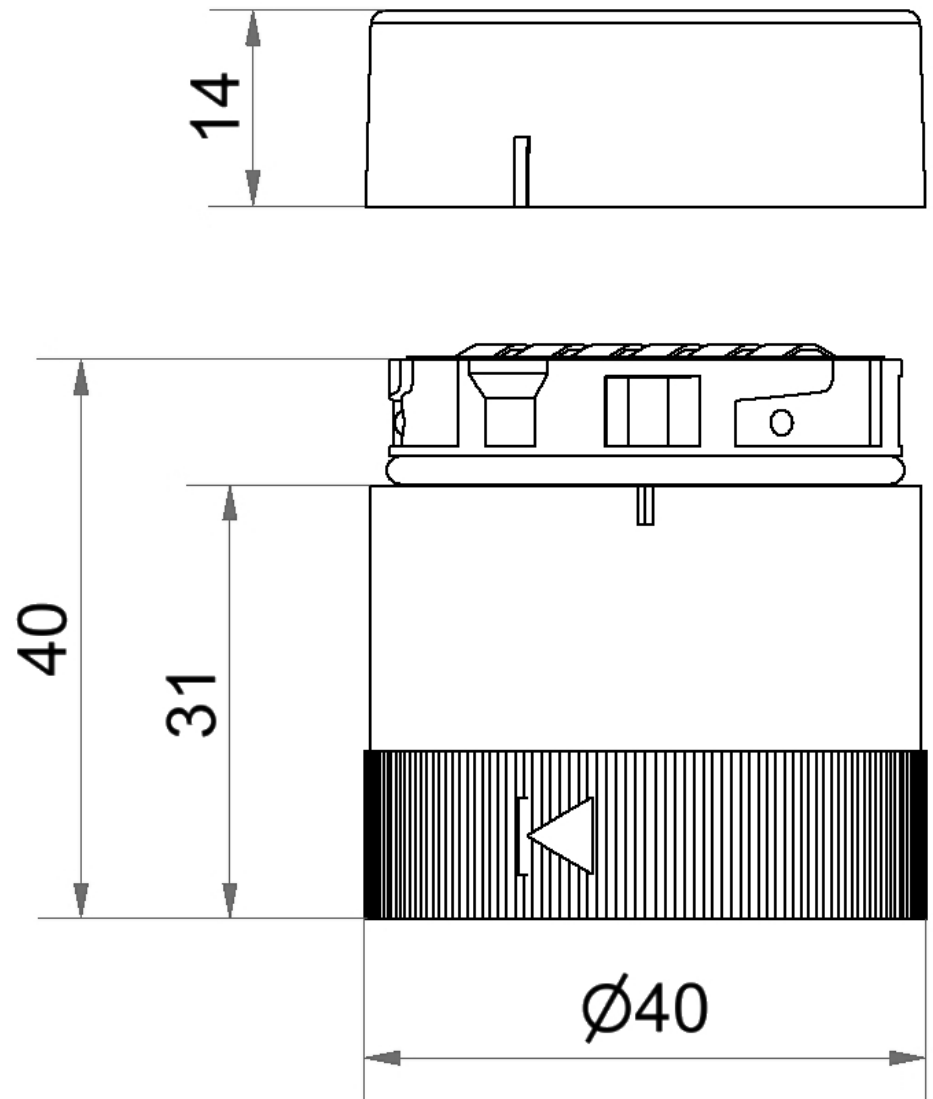

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.