

KombiSIGN 71 / Audible Devices 645

**Siren self-adjusting Pulse tone 24VDC BK**

Part No.:	645.810.55
Series:	KombiSIGN 71

**MECHANICAL DATA**

Height	110 mm
Diameter	70 mm
Materials	PC PC/ABS
Housing colour	Black
Protection category	IP65
Service life optical	5,000 h minimum
Acoustic service life	5,000 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	150 g
Product weight	121 g

**ELECTRICAL DATA**

Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	70 mA
Rated inrush current	500 mA
Protection class	Protection class 2
Pollution degree	3




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / Audible Devices 645

**Siren self-adjusting Pulse tone 24VDC BK**

**DRAWING**

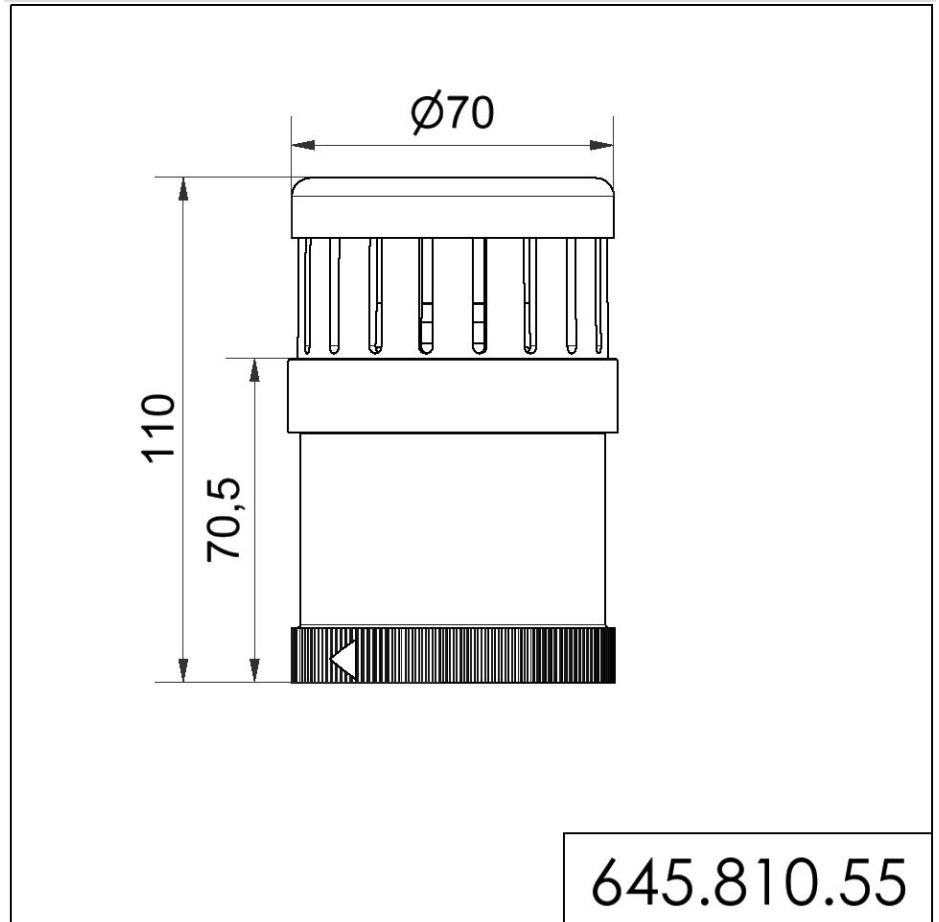

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.