

KombiSIGN 71 / AS-Interface Device AS-Interface Module BK



Part No.:	646.810.55
Series:	KombiSIGN 71



MECHANICAL DATA

Height	66 mm
Diameter	70 mm
Materials	PC
Dome colour	Black
Protection category	IP65
Service life optical	50,000 h maximum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	96 g
Product weight	77 g

ELECTRICAL DATA

Operating voltage	18,5 - 31,6V (ASi)
Rated operational current	210 mA
Protection class	Protection class 2
Pollution degree	3
Request to external PSU	PELV
AS-i Slave Type	A/B
AS-i Profile	S-8.A.E




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / AS-Interface Device

AS-Interface Module BK

DRAWING

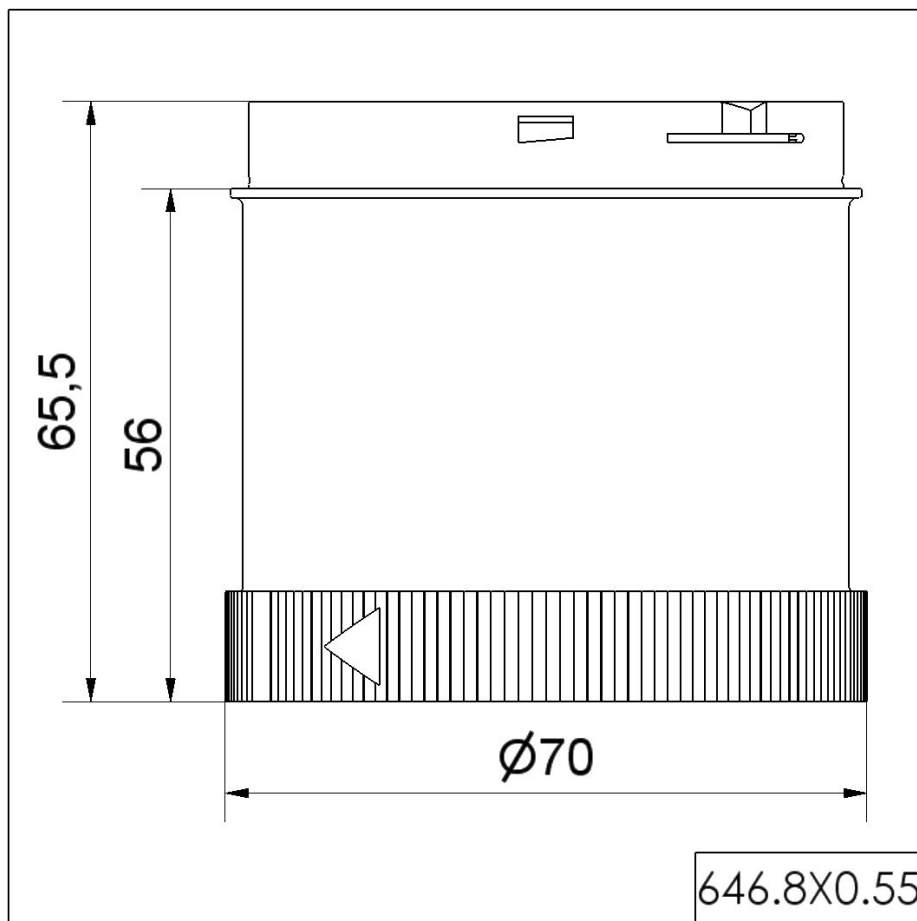

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.