

Ex horns and sirens / Ex-Electronic Buzzers Installation 718

Ex Electr. Buzzer EM Contin. tone 24VDC**Part No.:** 718.000.55**MECHANICAL DATA**

Height	49 mm
Diameter	43 mm
Materials	PC/ABS
Housing colour	Grey
Protection category	IP30
Connection	Flat plug
Type of fixing	Built-in mounting
Service life optical	5,000 h minimum
Acoustic service life	5,000 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Ex approval number	DMT 98 ATEX E005 X
Atex-guidance	2014/34/EU
Ex label for gas	II2G Ex ib IIC T4/T5/T6 Gb
Weight with packaging	59 g
Product weight	41 g

ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	20 mA
Rated inrush current	50 mA
Protection class	Protection class 3
Pollution degree	2
Request to external PSU	SELV/PELV

ACUSTICAL DATA

Volume/dB(max) at 1m distance	90,0 dB (A)
Acoustic signal image	Continuous tone
Audio frequency	2400 Hz




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Ex horns and sirens / Ex-Electronic Buzzers Installation 718

Ex Electr. Buzzer EM Contin. tone 24VDC

DRAWING

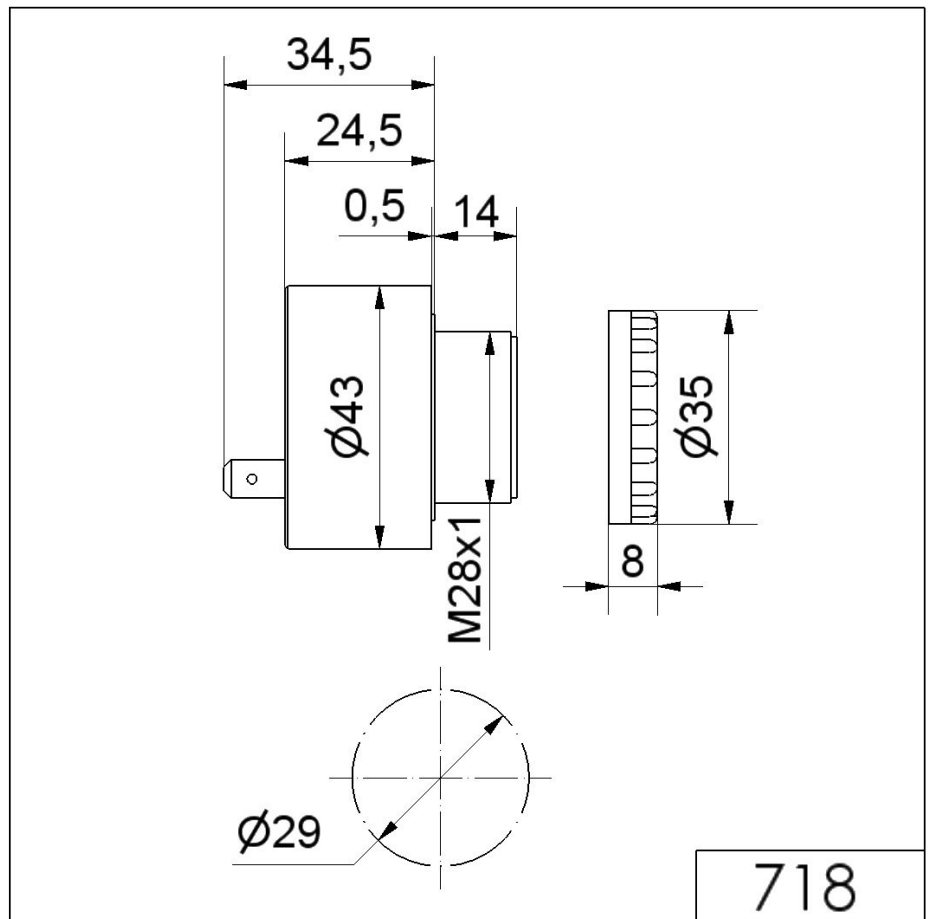

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.