


## Model Number

CJ10-30GK-A

## Features

- 10 mm not embeddable
- Comfort series
- The switching distance can be set over a wide range with the potentiometer

## Connection




## Accessories

### BF 30

Mounting flange, 30 mm

## Dimensions

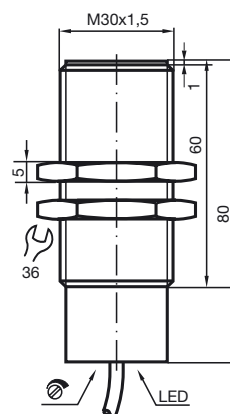

## Technical Data

### General specifications

Switching element function	NPN	NO/NC
Rated operating distance	$s_n$	10 mm
Installation	not embeddable	
Output polarity	DC	
Assured operating distance	$s_a$	0 ... 7.2 mm

### Nominal ratings

Operating voltage	$U_B$	10 ... 60 V DC
Switching frequency	$f$	0 ... 10 Hz
Reverse polarity protected	reverse polarity protected	
Short-circuit protection	pulsing	
Voltage drop	$U_d$	$\leq 2.8$ V
Operating current	$I_L$	0 ... 200 mA
Off-state current	$I_r$	0 ... 0.5 mA typ. 0.1 $\mu$ A at 25 °C
No-load supply current	$I_0$	$\leq 20$ mA

### Indicators/operating means

LED yellow	indication switching state
Potentiometer	sensitivity adjustment

### Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
---------------------	--------------------------------

### Mechanical specifications

Connection type	cable PVC, 2 m
Core cross-section	0.75 mm <sup>2</sup>
Housing material	PBT
Sensing face	PBT
Protection degree	IP65

### Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007

### Approvals and certificates

UL approval	cULus Listed, General Purpose
CSA approval	cCSAus Listed, General Purpose
CCC approval	Certified by China Compulsory Certification (CCC)