




Dimensions

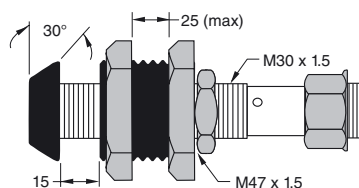

Technical data

General specifications

Inside diameter	30 mm
-----------------	-------

Mechanical specifications

Material	Sleeves: anodized aluminum Jam nuts: nickel-plated metal End cap: fiberglass reinforced nylon
----------	---

Model Number

CM-30

Mounting aid

Features

- Cushioned Mounting Bracket
- For use with 30 mm diameter sensors
- Maximum overtravel 14.5 mm

Application

The cushioned mounting bracket provides protection against accidental target contact for embeddable standard inductive sensors.



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk