



Model Number

LCR 01-2,3-0,15-Z1

Glass fiber optic - diffuse with PVC covering

Description

Attention:

Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.



Technical data

General specifications

Fiber optic length	l	150 mm
Fiber optic diameter	d	5.3 mm
Adapter form		01
End piece		Cylindrical
Bending radius		min. 15 mm
Fiber bundle diameter		2x 1.8 mm Output area: 2x 2.5 mm ²
Approvals		CE
Angle of divergence		approx. 68 °


Ambient conditions

Ambient temperature	-20 ... 85 °C (-4 ... 185 °F) [Adapter]
	-20 ... 85 °C (-4 ... 185 °F) [End head and Covering]
Storage temperature	-20 ... 85 °C (-4 ... 185 °F)

Mechanical specifications

Protection degree	IP65
Material	
Optical face	glass
Sheathing	PVC
Core	Glass fiber
End piece	Stainless steel 1.4305 / AISI 303
Adapter	Stainless steel 1.4305 / AISI 303
Extraction force	at probe at 20°C: 120 N

Dimensions

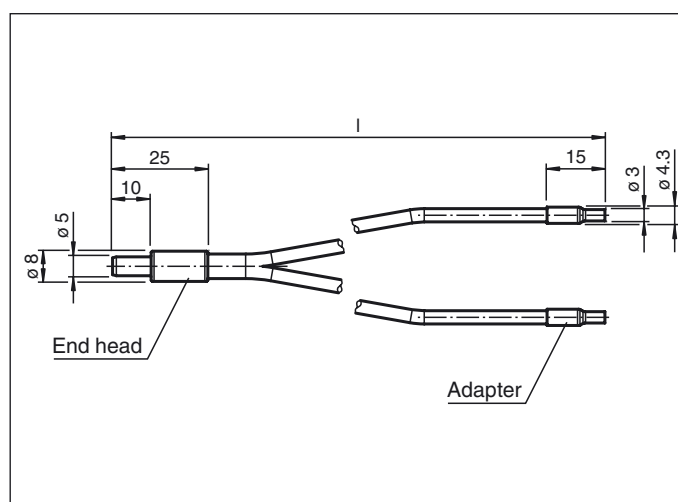

Release date: 2010-07-14 16:22 Date of issue: 2012-07-31 415758 eng.xml

Subject to reasonable modifications due to technical advances.

Copyright Pepperl+Fuchs. Printed in Germany

Pepperl+Fuchs Group • Tel.: Germany +49 621 776-0 • USA +1 330 4253555 • Singapore +65 67799091 • Internet <http://www.pepperl-fuchs.com>