




Dimensions

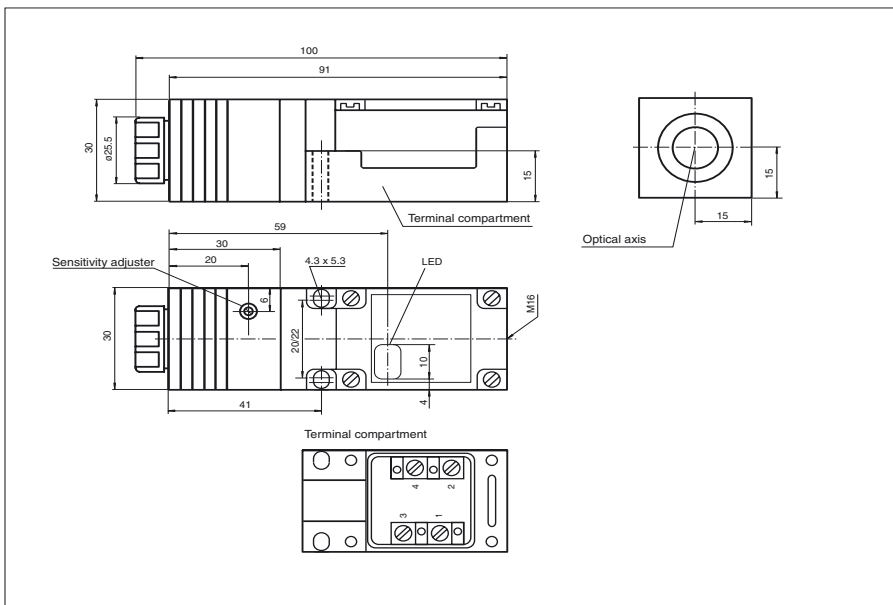

Model Number


OCT300-M1K-N2

Diffuse mode sensor, NAMUR, special design, 300 mm detection range, infrared light, light/dark on, DC version, NAMUR output, terminal compartment

Features

- ATEX-, IECEx approval for zone 20 (Dust) and zone 1 (Gas)
- Intrinsically safe, Ex op is ia IIC T6 Gb/IIIC T 135 °C Da
- Adjustable sensor head
- Scratch resistant mineral glass lens

Electrical connection

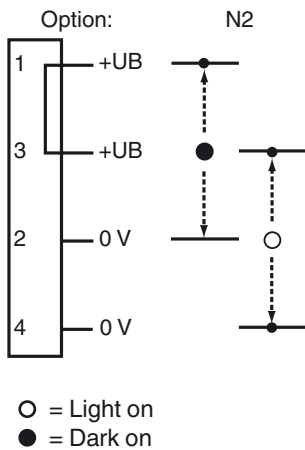

Release date: 2019-11-27 14:20 Date of issue: 2019-11-27 106541_eng.xml

Technical data

General specifications

Detection range	0 ... 300 mm
Adjustment range	70 ... 300 mm
Reference target	standard white 200 mm x 200 mm
Light source	IRED , 880 nm
Light type	modulated infrared light
Ambient light limit	≤ 40000 Lux sun light ≤ 30000 Lux halogen light
Temperature influence	≤ 0.5 mm/K

Functional safety related parameters

MTTF _d	1319 a
Mission Time (T _M)	20 a
Diagnostic Coverage (DC)	0 %

Indicators/operating means

Function indicator	LED yellow: switching state
Control elements	Sensing range adjuster

Electrical specifications

Operating voltage	U _B	6 ... 20 V DC (R _i approx. 0 Ohm)
Ripple		5 %
Time delay before availability	t _v	20 ms

Output

Switching type	light/dark on, programmable	
Signal output	1 NAMUR output NC/NO programmable	
Switching voltage	8 V DC (R _i approx. 1 kΩ)	
Switching frequency	f	≤ 100 Hz

Current consumption

Reference target detected	connection 1, 2: ≤ 1 mA connection 3, 4: ≥ 2.7 mA
Reference target not detected	connection 1, 2: ≥ 2.7 mA connection 3, 4: ≤ 1 mA

Response time	5 ms	
Repeat accuracy	R	≤ 0.5 % of the sensing range

Conformity

Product standard	EN 60947-5-2
------------------	--------------

Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 80 °C (-40 ... 176 °F)

Mechanical specifications

Housing width	30 mm
Housing height	30 mm
Housing depth	102 mm
Degree of protection	IP67
Connection	M16 terminal compartment, core cross section ≤ 2.5 mm ²
Material	
Housing	PBT
Optical face	Scratch resistant mineral glass lens
Mass	100 g

Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-6:2000

Approvals and certificates

FM approval

Approved for	IS / I,II,III / 1 / ABCDEFG / T5 - 116-0110; Entity NI / I / 2 / ABCD / T6 Entity Parameters: V _{Max} = 12.6 V, I _{Max} = 20 mA, C _i = 1.11 μF, L _i = 0 mH (Groups A, B, C, D, E, F, G). V _{Max} = 15.5 V, I _{Max} = 52 mA, C _i = 1.11 μF, L _i = 0 mH (Groups C, D, E, F, G).
--------------	---

CSA approval

Approved for	Class I, Division 2, Groups A, B, C and D Rated 20V (max), 50mA. These sensors are suitable for installation in (or through the wall of) a suitable enclosure with provision for connection of rigid metal conduit, as acceptable to the local inspection authority having jurisdiction.
--------------	--


CCC approval

CCC approval / marking not required for products rated ≤36 V

Curves / Diagrams


Characteristic response curve

OCT300-M1K-N2

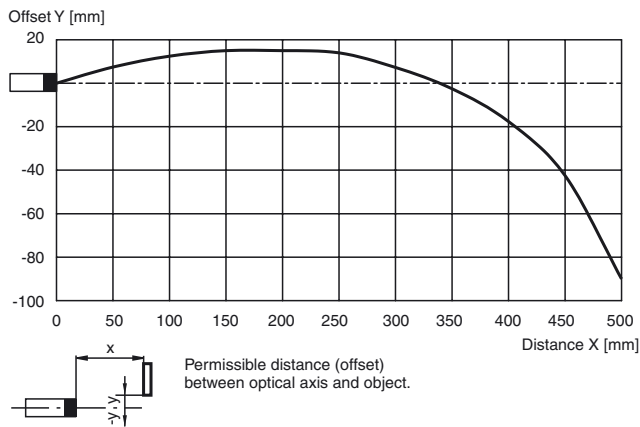

Detection ranges

OCT300-M1K-N2

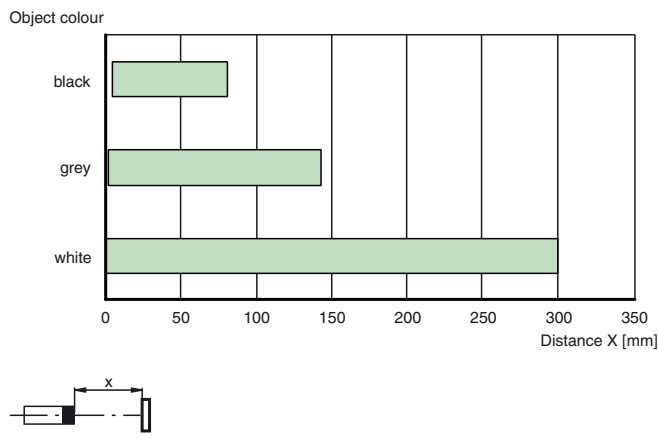

Release date: 2019-11-27 14:20 Date of issue: 2019-11-27 106541_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
fa-info@pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk