

Features

- 115/230 V AC supply
- Output 24 V DC, 4 A
- Fused output
- Power Rail connection

Function

This regulated power supply provides 24 V DC, at 4 A. It features removable terminals, LED fault indication, and mounts directly on the Power Rail.

Designed with a replaceable fuse and LED, it will provide a green visual indication for normal operation or a flashing red indication if a fault occurs.


Attention: Ignoring the safety instructions (i. e., touching hot sections when the device is open, handling malpractices) can be extremely dangerous.

When exceeding the values stated in the technical data, there is a danger of overheating. As a result, the operation of the power supply and its electrical safety may be impaired.


Before starting installation or service, switch mains off. Do not plug or unplug powered!

Assembly

Front view

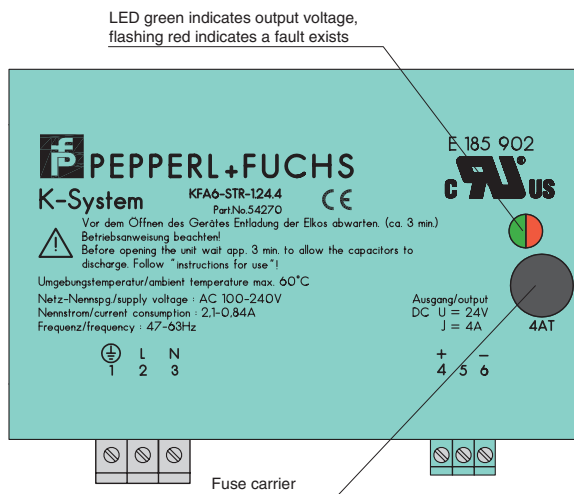

Connection

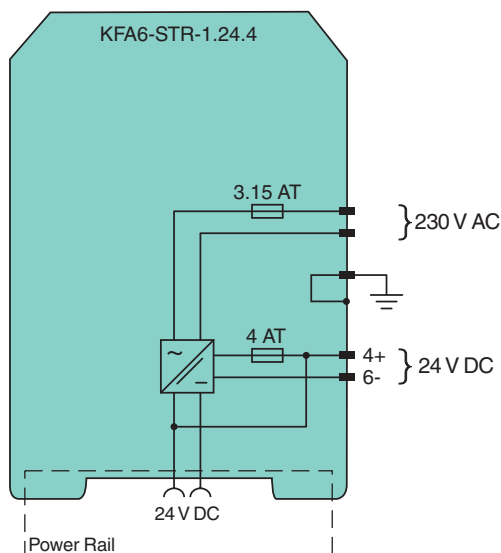

Release date 2017-08-31 10:00 Date of issue 2017-09-04 054270_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Supply		
Connection		terminals 1 (PE), 2 (L1), 3 (N)
Rated voltage	U_r	92 ... 265 V AC , 47 ... 63 Hz
Rated current	I_r	2.1 ... 0.84 A
Fusing		back-up fuse : B characteristic: 16 A B characteristic: 10 A C characteristic: 6 A
Failure override time		> 75 ms / 230 V AC ; 5 ms / 115 V AC
Output		
Connection		terminals 4+, 6-
Current		0 ... 4 A , Power Rail limiting by means of fuse 4 AT , electron. limitation typ. 4.6 A
Output rated operating current		≤ 4 A
Output voltage		24 V DC
Ripple		< 100 mV _{SS}
Efficiency		typ. 87 %
Overvoltage protected		< 28 V DC
Galvanic isolation		
Power supply/Output		for 253 V AC design insulation voltage
Indicators/settings		
Display elements		LED
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 55011:2009+A1:2010 , EN 61000-3-2:2014 , EN 61000-3-3:2013 , EN 61000-6-1:2007 , EN 61000-6-2:2005 , EN 61000-6-3:2007+A1:2011 , EN 61000-6-4:2007+A1:2011
Low voltage		
Directive 2014/35/EU		EN 60950-1:2006+A11:2009+A12:2011+A1:2010+A2:2013+AC:2011
Conformity		
Degree of protection		IEC 60529:2001
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		self-opening connection terminals
Core cross-section		max. 2 x 2.5 mm ²
Mass		approx. 800 g
Dimensions		140 x 103.5 x 99 mm (5.5 x 4.1 x 3.9 inch)
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
General information		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk