

Features

- 1-channel signal conditioner
- Universal usage at different power supplies
- Scaleable current or voltage input
- Current or voltage output
- Relay contact output
- Configurable by keypad
- Line fault detection (LFD)

Function

This signal conditioner is suitable for the connection of current and voltage signals and provides isolation for nonintrinsically safe applications.

The input ranges include 0 mA ... 20 mA, 0 V... 10 V or 0 mV... 60 mV. Subranges from the input ranges are selectable.

The output measuring signals are 0/4 mA ... 20 mA, 0/2 V... 10 V or 0/1 V... 5 V.


The output relay serves as trip value contact.

On the display the measured value can be indicated in various physical units.


The unit is easily programmed by the use of a keypad located on the front of the unit.

For additional information, refer to the manual and www.pepperl-fuchs.com.

Assembly

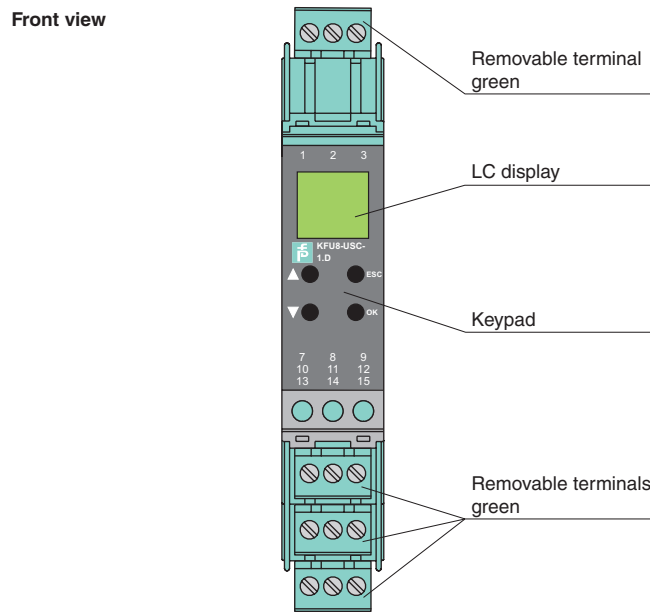

Connection

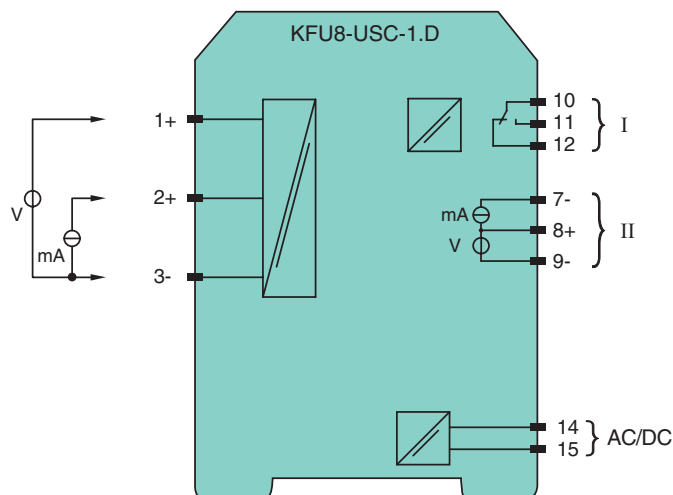

Release date 2019-11-25 12:04 Date of issue 2019-11-25 188750_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

General specifications		
Signal type		Analog input
Supply		
Connection		terminals 14, 15
Rated voltage	U_r	20 ... 90 V DC / 48 ... 253 V AC
Rated current	I_r	≤ 80 mA DC / ≤ 45 mA AC
Power consumption		≤ 1.6 W / ≤ 2.6 VA
Input		
Connection side		field side
Connection		terminals 1+, 3- : mV, V ; terminals 2+, 3- : mA
Input resistance		voltage: 1 M Ω , current: ≤ 100 Ω
Limit		30 V
Current		0 ... 20 mA
Voltage		0 ... 10 V / 0 ... 60 mV
Resolution		15 Bit
Output		
Connection side		control side
Connection		output I: terminals 10, 11, 12 output II: terminals 7-, 8+, 9-
Output I		signal, relay
Contact loading		250 V AC/2 A/cos ϕ 0.7; 40 V DC/2 A
Mechanical life		2 x 10 ⁷ switching cycles
Energized/De-energized delay		approx. 10 ms / approx. 10 ms
Output II		analog
Load		current: ≤ 550 Ω , voltage: ≥ 1 k Ω
Analog voltage output		0/1 ... 5 V , 0/2 ... 10 V
Analog current output		0/4 ... 20 mA
Transfer characteristics		
Deviation		0.1 % of full-scale value
Resolution/accuracy		current: 1 μ A/20 μ A voltage: 0.5 mV/10 mV mV: 3 μ V/60 μ V
Influence of ambient temperature		0.003 %/K (30 ppm)
Reaction time		≥ 150 ms/ ≤ 300 ms
Galvanic isolation		
Input/Output		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Input/power supply		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Output/power supply		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Indicators/settings		
Display elements		display
Control elements		Control panel
Configuration		via operating buttons
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Low voltage		
Directive 2014/35/EU		EN 61010-1:2010
Conformity		
Electromagnetic compatibility		NE 21
Degree of protection		IEC 60529
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		150 g
Dimensions		20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) , housing type B3
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
General information		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Release date 2019-11-25 12:04 Date of issue 2019-11-25 188750_eng.xml



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk