

## Features

- 1-channel signal conditioner
- 24 V DC supply
- Input 2-wire and 3-wire transmitters and 2-wire current sources
- Current and voltage output
- Accuracy 0.1 %
- Configurable by DIP switches
- Connection via screw terminals

## Function

This signal conditioner provides the galvanic isolation between field circuits and control circuits.

The device supplies 2-wire and 3-wire transmitters, and can also be used with current sources.

The device provides the following standard signals at the output:


- 0/4 mA ... 20 mA signal
- 0/2 V ... 10 V signal

The device is easily configured by the use of DIP switches.

The device can be powered via terminals or Power Bus.


## Assembly

Front view

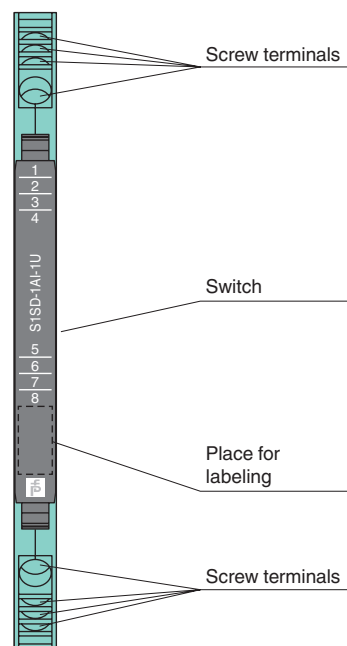


CE

## Connection

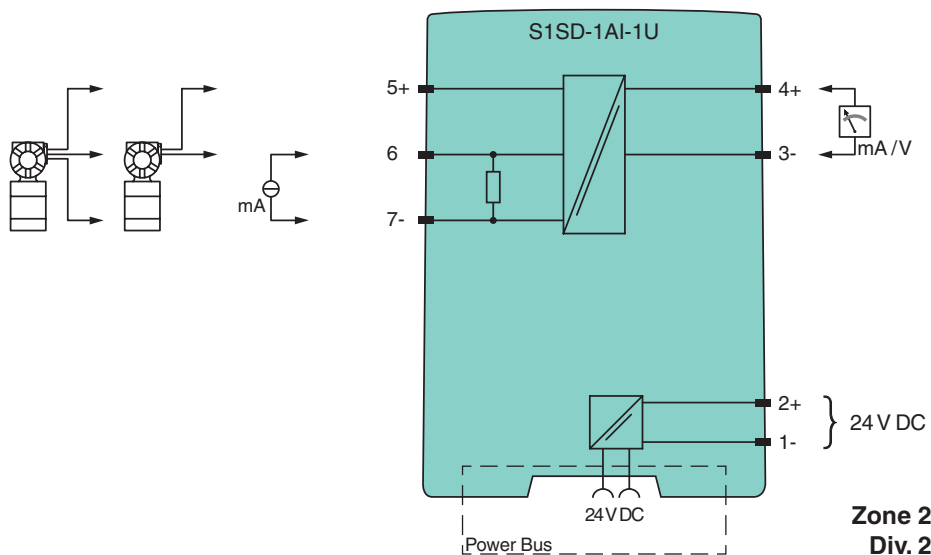

Zone 2  
Div. 2

<b>General specifications</b>	
Signal type	Analog input
<b>Supply</b>	
Connection	Power Bus or terminals 1-, 2+
Rated voltage $U_r$	16.8 ... 31.2 V DC
Power dissipation	0.9 W
Power consumption	1.3 W
<b>Input</b>	
Connection side	field side
Connection	terminals 5+, 6, 7-
Input signal	0/4 ... 20 mA
Open circuit voltage/short-circuit current	$\leq 22 \text{ V} / 30 \text{ mA}$
Input resistance	25 $\Omega$
Transmission range	linearity range: -1 ... 110 %
Available voltage	16 V at 20 mA
<b>Output</b>	
Connection side	control side
Connection	terminals 3-, 4+
Analog voltage output	0/2 ... 10 V, load $\geq 2 \text{ k}\Omega$
Analog current output	0/4 ... 20 mA, load $\leq 600 \Omega$
Ripple	$\leq 10 \text{ mV}_{\text{eff}}$
<b>Transfer characteristics</b>	
Accuracy	$\leq 0.1 \%$ of full-scale value
Influence of ambient temperature	$< 100 \text{ ppm/K}$ of full-scale value
Frequency range	0 ... 100 Hz
Rise time/fall time	$\leq 3.5 \text{ ms}$
<b>Galvanic isolation</b>	
Output/power supply	safe electrical isolation by reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub> test voltage 3 kV, 50 Hz, 1 min
Input/Other circuits	safe electrical isolation by reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub> test voltage 3 kV, 50 Hz, 1 min
<b>Indicators/settings</b>	
Labeling	space for labeling at the front
<b>Directive conformity</b>	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
<b>Conformity</b>	
Degree of protection	IEC 60529:2001
Protection against electrical shock	EN 61010-1:2010
<b>Ambient conditions</b>	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Damaging gas	designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3
<b>Mechanical specifications</b>	
Degree of protection	IP20
Connection	screw terminals
Core cross-section	0.5 ... 2.5 mm <sup>2</sup> (20 ... 14 AWG)
Mass	approx. 70 g
Dimensions	6.2 x 97 x 107 mm (0.24 x 3.82 x 4.21 inch), housing type S1
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with hazardous areas</b>	
Certificate	DEMKO 16 ATEX 1750X
Marking	 II 3G Ex nA IIC T4 Gc
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013, EN 60079-15:2010
<b>International approvals</b>	
UL approval	E106378
IECEX approval	IECEX UL 16.0116X
Approved for	Ex nA IIC T4 Gc
<b>General information</b>	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .
<b>Accessories</b>	

Release date 2017-08-09 14:56 Date of issue 2019-05-21 276396\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
[www.pepperl-fuchs.com](http://www.pepperl-fuchs.com)USA: +1 330 486 0002  
[pa-info@us.pepperl-fuchs.com](mailto:pa-info@us.pepperl-fuchs.com)Germany: +49 621 776 2222  
[pa-info@de.pepperl-fuchs.com](mailto:pa-info@de.pepperl-fuchs.com)Singapore: +65 6779 9091  
[pa-info@sg.pepperl-fuchs.com](mailto:pa-info@sg.pepperl-fuchs.com)

DOWNLOADED FROM WWW.SCATTIS.CO.UK

Optional accessories	power feed module S1SD-2PF Power Bus POWERBUS-SETL5.*** Power Bus POWERBUS-SETH5.*** cover for DIN mounting rail POWERBUS-COV.250 end cap POWERBUS-CAP
----------------------	--

**Configuration**

**Switch settings**

Input	Output	S					
		1	2	3	4	5	6
0 mA ... 20 mA	0 mA ... 20 mA						
	4 mA ... 20 mA				ON		
	0 V... 10 V	ON	ON				
	2 V ... 10 V	ON	ON		ON		
4 mA ... 20 mA	0 mA ... 20 mA					ON	
	4 mA ... 20 mA						
	0 V... 10 V	ON	ON			ON	
	2 V ... 10 V	ON	ON				

Factory settings: all switches in position OFF



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

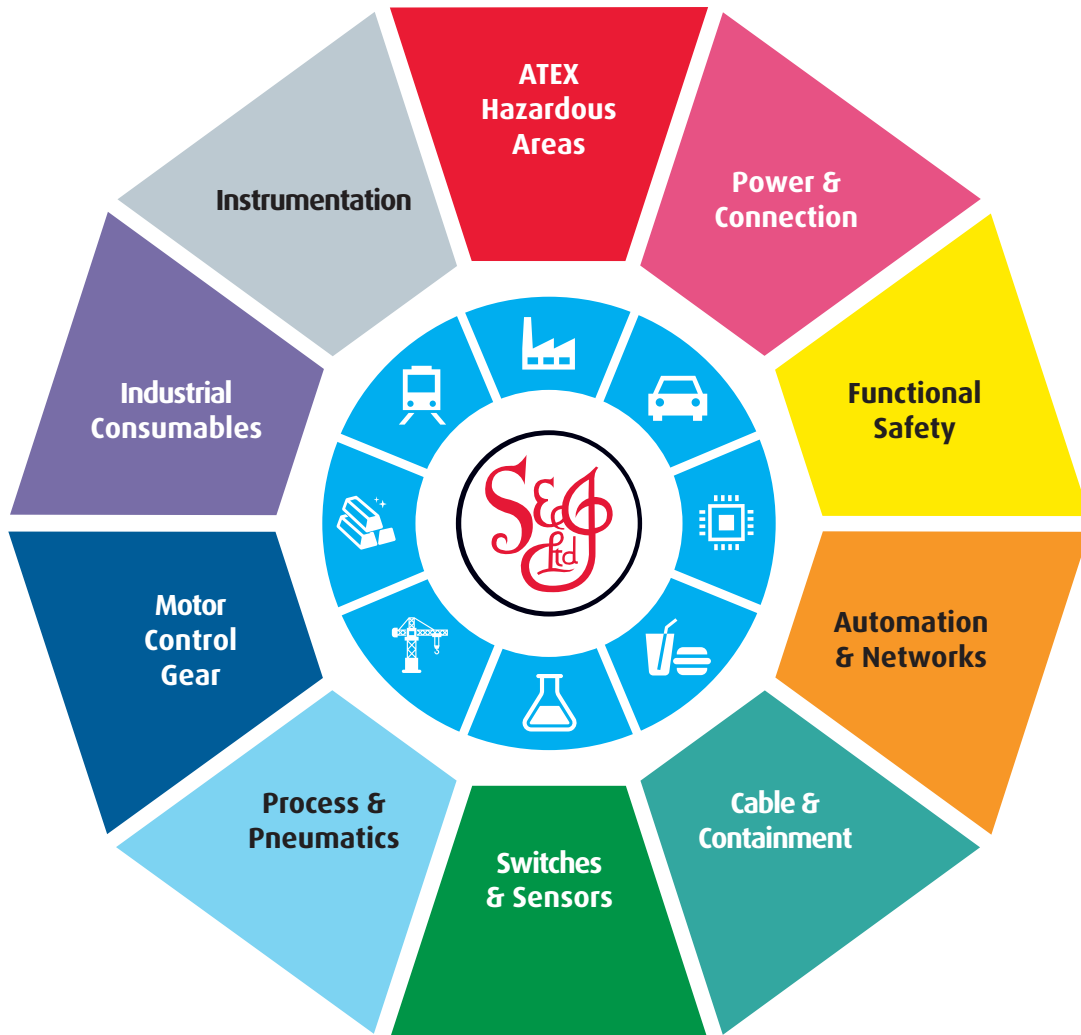

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)