




## Dimensions

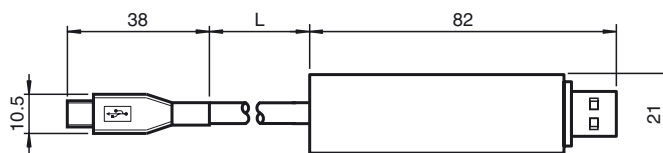

## Model Number

### S-ADP-USB

Adapter with USB Interface

## Features

- Isolated USB interface cable
- Used with SC-System devices
- Configurable via PC

## Function

The adapter with USB interface provides the connection between device and PC. Using this connection, the device can be configured by software.

## Accessories

SC-Config

## Technical data

### Electrical specifications

Current consumption	50 mA (via USB)
Galvanic isolation	safe electrical isolation by reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub> test voltage 3 kV, 50 Hz, 1 min

### Directive conformity

Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)

### Ambient conditions

Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
---------------------	-------------------------------

### Mechanical specifications

Connection	
Device	1 x μUSB
Computer	1 x Type A USB
Mass	50 g
Cable length	1.5 m

## Electrical connection



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)